

## **OIL ANALYSIS REPORT**

Sample Rating Trend







Machine Id 21-091S5-5

Component New (Unused) Oil Fluid {not provided} (--- GAL)

## DIAGNOSIS


Recommendation

This is a baseline read-out on the submitted sample.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0881564		
Sample Date		Client Info		18 Mar 2024		
Machine Age	mls	Client Info		0		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>5	0		
Chromium		ASTM D5185m	>5	۰ <1		
Nickel	ppm			<1		
	ppm	ASTM D5185m	>5			
Titanium Silver	ppm	ASTM D5185m	<b>F</b>	<1		
	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>5	2		
Lead	ppm	ASTM D5185m	>5	<1		
Copper	ppm	ASTM D5185m	>5	<1		
Tin	ppm	ASTM D5185m	>5	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		71		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		134		
Phosphorus	ppm	ASTM D5185m		412		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		1799		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304		0.028		
ppm Water	ppm	ASTM D6304		282		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	407		
Particles >6µm		ASTM D7647	>1300	103		
Particles >14µm		ASTM D7647	>160	11		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/14/11		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.60		



## **OIL ANALYSIS REPORT**





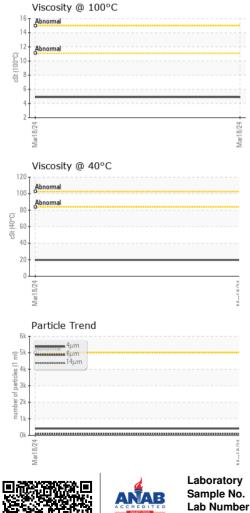

VISU	JAL		method	limit/base	current	history1	history2
White	Metal s	scalar	*Visual	NONE	NONE		
Yellow	Metal s	scalar	*Visual	NONE	NONE		
Precip	itate s	scalar	*Visual	NONE	NONE		
Silt	S	scalar	*Visual	NONE	NONE		
Debris	s s	scalar	*Visual	NONE	NONE		
Sand/	Dirt s	scalar	*Visual	NONE	NONE		
Appea Odor	irance s	scalar	*Visual	NORML	NORML		
		scalar	*Visual	NORML	NORML		
		scalar	*Visual		NEG		
Free \	Vater s	scalar	*Visual		NEG		
FLU	ID PROPERTIE	S	method	limit/base	current	history1	history2
Visc @	⊉ 40°C o	St	ASTM D445		19.65		
Visc	0 100°C	St	ASTM D445		4.9		
Viscos	sity Index (VI)	Scale	ASTM D2270		188		
SAN	IPLE IMAGES		method	limit/base	current	history1	history2
Color						no image	no image
Bottor	n					no image	no image
	APHS bus Alloys			491,52 122,88 30,72 7,68	0 - Severe		-26 -24 -22 -20 ਵੁ
Non ud 4	ferrous Metals			48/10 1.32	•		-18 -16 -14 -12 -10
150 Åbnor				(mg KOH/g) 1	Acid Number	14μ 21μ	38μ 71μ
(2-010) 00101 0000 0				Acid Number (19)24	0 +72/81/2000		Mar18/24
Laboratory : WearCl Sample No. : WC088 Lab Number : 061244 Unique Number : 109386 Test Package : MOB 2 To discuss this sample report, contact C - Denotes test methods that are outsid tatements of conformity to specification	60 11 ( Additional Test: <i>Customer Service</i> le of the ISO 170	Recei Tester Diagn s: FT-If at 1-8 25 sco	ved : 20 d : 28 osed : 28 R, ICP-New0 00-237-1369 pe of accred	Mar 2024 Mar 2024 Mar 2024 - Jona Dil, KF, KV10 D. Mation.	than Hester 00, PrtCount, VIÇ	TAF ontact: GIANN/ gianna.creda	E PLAINS RE RYTOWN, N US 1059