




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

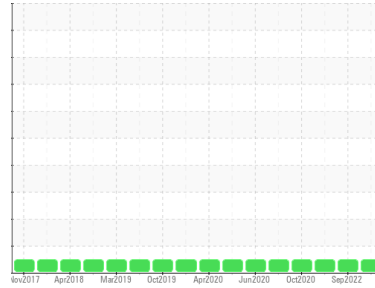

Area
2H28
 Machine Id
PETERBILT REEFER TRK CV 3A 348 TK 1 RTK9844 (S/N 2NP3XJOY8HM443144)
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 30 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			ARI06124514	ARI05636242	ARI0002244
Sample Date	Client Info			20 Mar 2024	07 Sep 2022	02 Feb 2021
Machine Age	mls	Client Info		158514	130773	3419
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	10	29	16
Chromium	ppm	ASTM D5185m	>20	<1	2	<1
Nickel	ppm	ASTM D5185m	>4	0	2	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185m	>20	4	12	7
Lead	ppm	ASTM D5185m	>40	<1	1	<1
Copper	ppm	ASTM D5185m	>330	1	3	2
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	20	40	290
Barium	ppm	ASTM D5185m	10	2	0	0
Molybdenum	ppm	ASTM D5185m	100	14	56	115
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	57	686	596
Calcium	ppm	ASTM D5185m	3000	2308	1379	1617
Phosphorus	ppm	ASTM D5185m	1150	977	739	902
Zinc	ppm	ASTM D5185m	1350	1129	999	970
Sulfur	ppm	ASTM D5185m	4250	3468	2679	2749




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	6	10
Sodium	ppm	ASTM D5185m	>75	<1	5	4
Potassium	ppm	ASTM D5185m	>20	7	10	8
Fuel	%	ASTM D3524	>5	1.4	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	7.1	14.5	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.2	26.7	24.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.9	26.9	21
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.3	7.3	8.4







OIL ANALYSIS REPORT

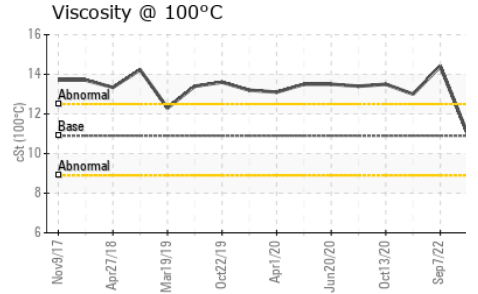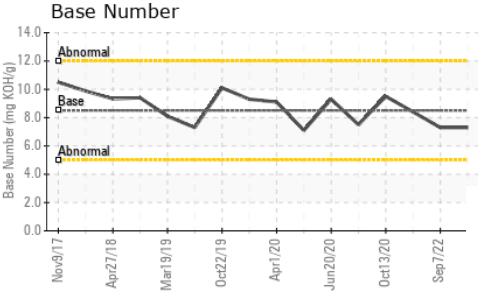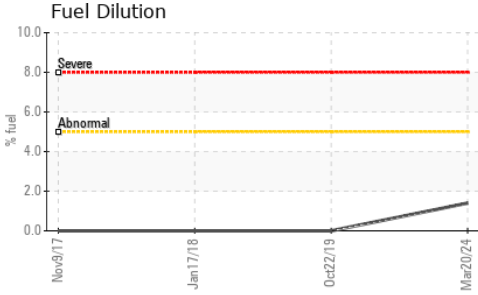

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	11.0	14.4	13.0

GRAPHS

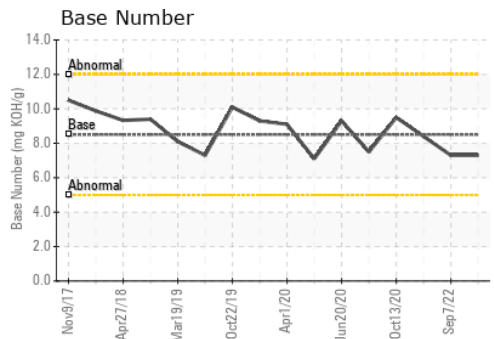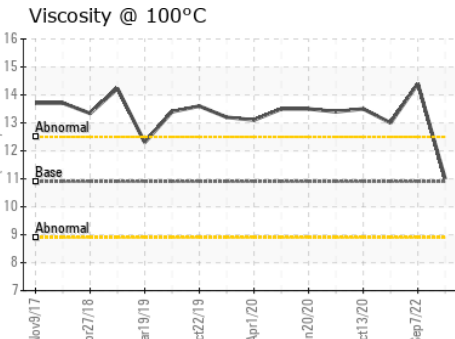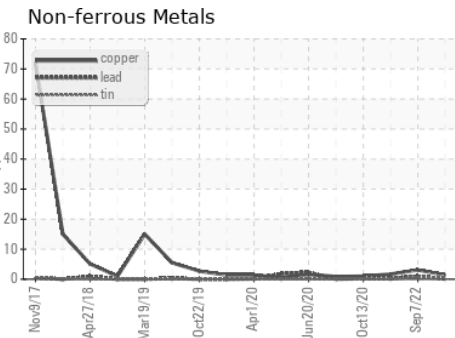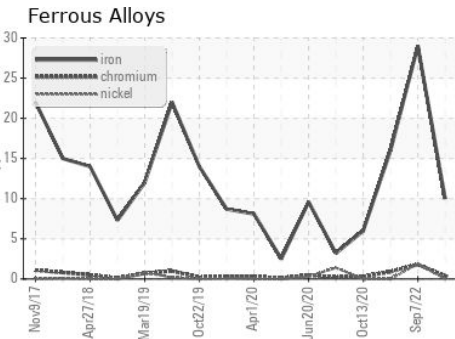

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ARI06124514 **Received** : 21 Mar 2024
Lab Number : **06124514** **Tested** : 22 Mar 2024
Unique Number : 10938665 **Diagnosed** : 22 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

INSITUFORM TECHNOLOGIES, INC
 17988 EDISON AVE.
 CHESTERFIELD, MO
 US 63005
 Contact: JOHN SLOAN
 ARICHTER@INSITUFORM.COM
 T: (314)280-7555
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)