




OIL ANALYSIS REPORT

Sample Rating Trend

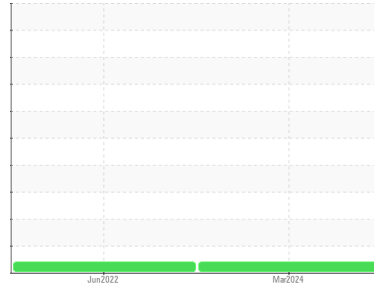

VISCOSITY



Machine Id
RSD-106

Component
Diesel Engine

Fluid
CITGO CITGARD 700 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC06124517	WC0588164	---
Sample Date	Client Info			04 Mar 2024	14 Jun 2022	---
Machine Age	hrs	Client Info		1738	796	---
Oil Age	hrs	Client Info		500	500	---
Oil Changed		Client Info		N/A	Changed	---
Sample Status				ATTENTION	ATTENTION	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	35	42	---
Chromium	ppm	ASTM D5185m	>20	<1	1	---
Nickel	ppm	ASTM D5185m	>4	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	3	2	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	3	4	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	20	10	15	---
Barium	ppm	ASTM D5185m	0	2	0	---
Molybdenum	ppm	ASTM D5185m	59	60	56	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m	783	810	829	---
Calcium	ppm	ASTM D5185m	1238	1263	1249	---
Phosphorus	ppm	ASTM D5185m	949	1045	968	---
Zinc	ppm	ASTM D5185m	1116	1221	1234	---
Sulfur	ppm	ASTM D5185m	2909	3458	3542	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	8	---
Sodium	ppm	ASTM D5185m		1	4	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Fuel	%	ASTM D3524	>5	<1.0	0.2	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	7.6	7.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.4	19.2	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.6	14.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.5	9.2	---











OIL ANALYSIS REPORT

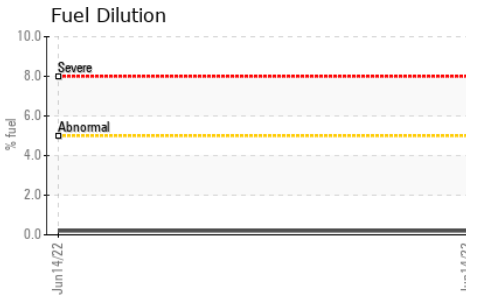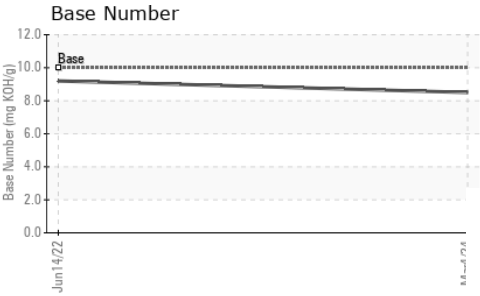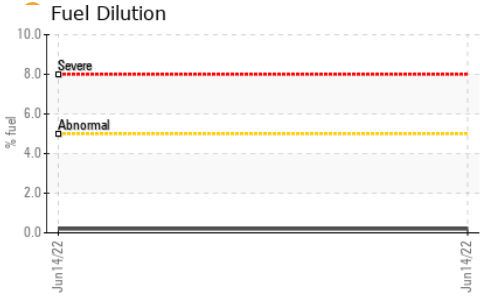

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.2	● 11.1	● 10.9

GRAPHS

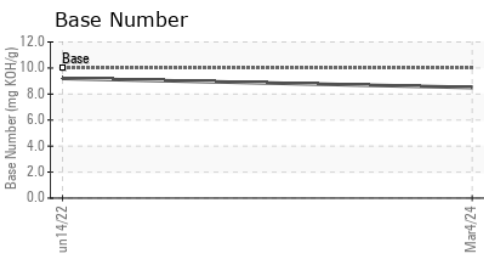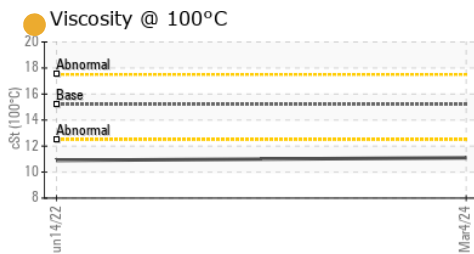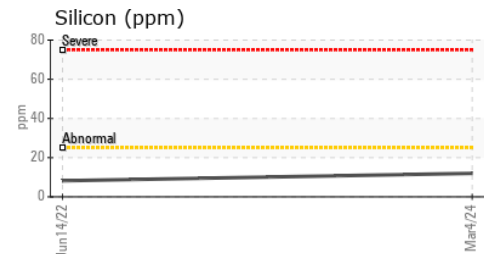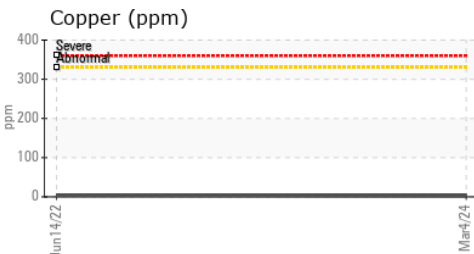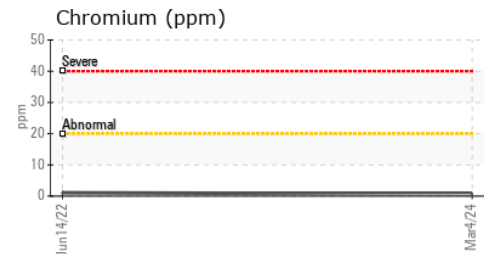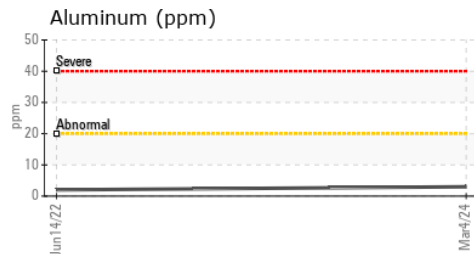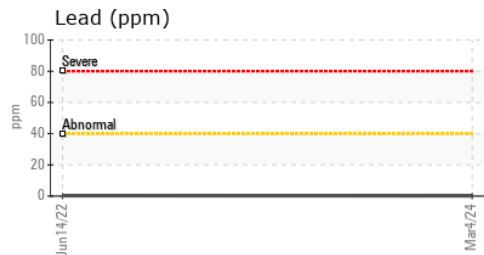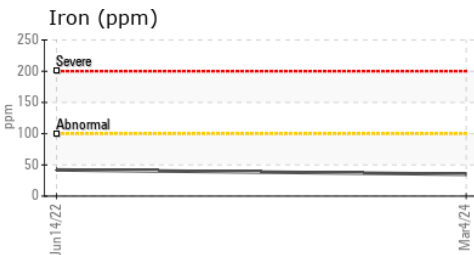

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06124517 **Received** : 21 Mar 2024
Lab Number : 06124517 **Tested** : 23 Mar 2024
Unique Number : 10938668 **Diagnosed** : 23 Mar 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

E.C. PACE CO.
 1811 HOLLINS RD.
 ROANOKE, VA
 US 24012
 Contact: EDDIE SECO
 ESECO@ECPACE.COM
 T: (276)266-5849
 F: (540)343-6909

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)