




OIL ANALYSIS REPORT

Sample Rating Trend

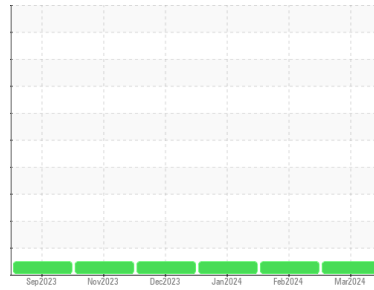

NORMAL



Machine Id

1705

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0894053	WC0893990	WC0868133
Sample Date	Client Info		08 Mar 2024	02 Feb 2024	04 Jan 2024
Machine Age	mls Client Info		0	0	0
Oil Age	mls Client Info		0	0	0
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>100	9	8	9
Chromium	ppm ASTM D5185m	>20	<1	<1	<1
Nickel	ppm ASTM D5185m	>4	0	0	0
Titanium	ppm ASTM D5185m		<1	0	0
Silver	ppm ASTM D5185m	>3	<1	0	0
Aluminum	ppm ASTM D5185m	>20	3	2	1
Lead	ppm ASTM D5185m	>40	<1	0	0
Copper	ppm ASTM D5185m	>330	4	4	5
Tin	ppm ASTM D5185m	>15	<1	0	0
Vanadium	ppm ASTM D5185m		<1	<1	<1
Cadmium	ppm ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	250	<1	<1	2
Barium	ppm ASTM D5185m	10	2	0	0
Molybdenum	ppm ASTM D5185m	100	57	56	58
Manganese	ppm ASTM D5185m		0	0	<1
Magnesium	ppm ASTM D5185m	450	882	1028	949
Calcium	ppm ASTM D5185m	3000	1055	1087	1078
Phosphorus	ppm ASTM D5185m	1150	998	1022	1006
Zinc	ppm ASTM D5185m	1350	1180	1287	1249
Sulfur	ppm ASTM D5185m	4250	3208	3031	3022

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>25	4	6	5
Sodium	ppm ASTM D5185m	>158	0	2	2
Potassium	ppm ASTM D5185m	>20	3	<1	<1

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3	0.2	0.2	0.2
Nitration	Abs/cm *ASTM D7624	>20	8.4	8.4	8.2
Sulfation	Abs/.1mm *ASTM D7415	>30	23.0	23.0	22.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	24.3	24.5	22.7
Base Number (BN)	mg KOH/g ASTM D2896	8.5	6.7	6.5	6.6











OIL ANALYSIS REPORT

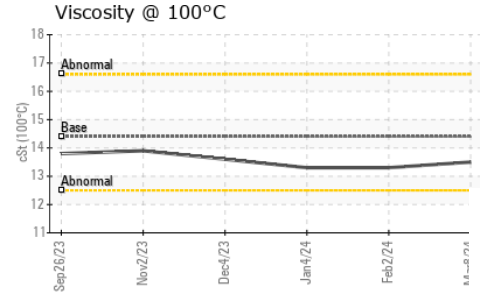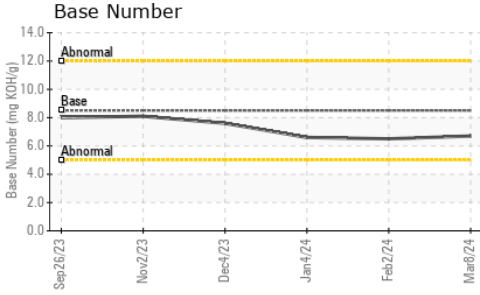

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.3

GRAPHS

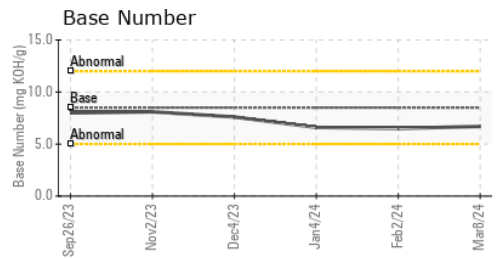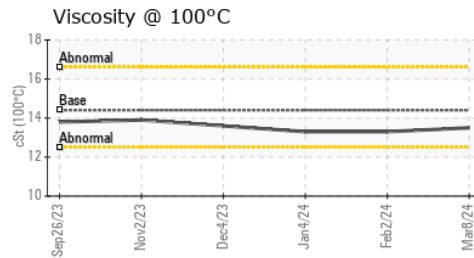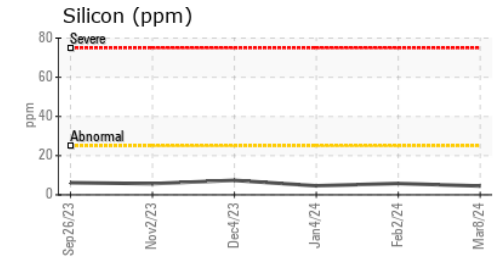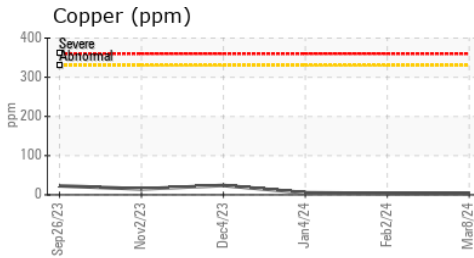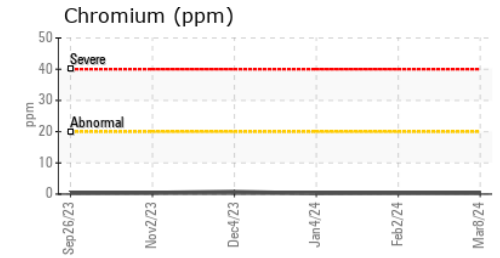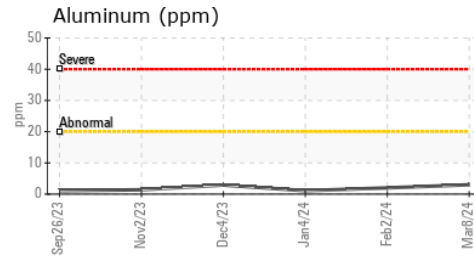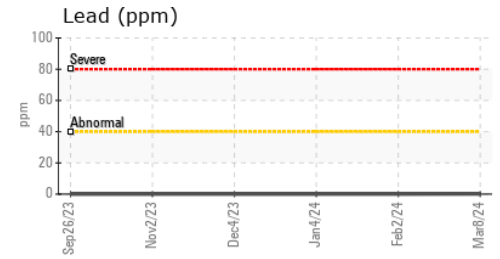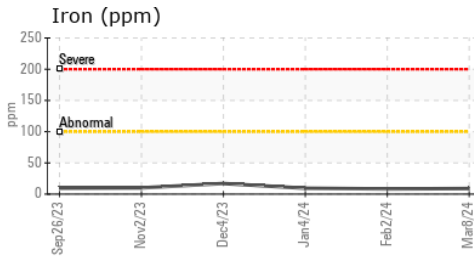

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0894053

Lab Number : 06124573

Unique Number : 10938724

Test Package : MOB 1 (Additional Tests: TBN)

Received : 21 Mar 2024

Tested : 21 Mar 2024

Diagnosed : 21 Mar 2024 - Wes Davis

GO DURHAM - RAPT

1903 FAYETTEVILLE ST

DURHAM, NC

US 27701

Contact: Robert Iosiniecki

Robert.Iosiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: