




OIL ANALYSIS REPORT

Sample Rating Trend

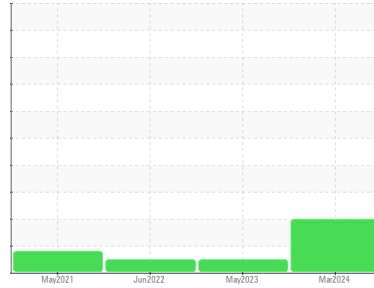

ISO



Area
VIAM/BLDG 3/Injection Mold
Machine Id
[VIAM^BLDG 3^Injection Mold] INJ MOLD 09
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 46 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KFS0005118	KFS0002458	KFS0001019
Sample Date	Client Info	18 Mar 2024	16 May 2023	29 Jun 2022
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	Not Changd
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<1	<1	<1
Chromium	ppm ASTM D5185m >20	<1	0	0
Nickel	ppm ASTM D5185m >20	0	<1	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m	0	0	0
Aluminum	ppm ASTM D5185m >20	0	<1	0
Lead	ppm ASTM D5185m >20	0	0	0
Copper	ppm ASTM D5185m >20	2	<1	1
Tin	ppm ASTM D5185m >20	0	<1	<1
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	0	0
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 0	<1	<1	0
Manganese	ppm ASTM D5185m 0	<1	<1	0
Magnesium	ppm ASTM D5185m 0	0	1	0
Calcium	ppm ASTM D5185m 50	42	44	45
Phosphorus	ppm ASTM D5185m 330	333	351	340
Zinc	ppm ASTM D5185m 430	410	443	422
Sulfur	ppm ASTM D5185m 760	1368	1558	1529


CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<1	<1	<1
Sodium	ppm ASTM D5185m	<1	<1	<1
Potassium	ppm ASTM D5185m >20	0	<1	0


FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >1300	● 2347	682	501
Particles >6µm	ASTM D7647 >320	▲ 1081	228	163
Particles >14µm	ASTM D7647 >80	● 138	28	23
Particles >21µm	ASTM D7647 >20	● 30	8	4
Particles >38µm	ASTM D7647 >4	2	1	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >17/15/13	▲ 18/17/14	17/15/12	16/15/12


Particle Trend

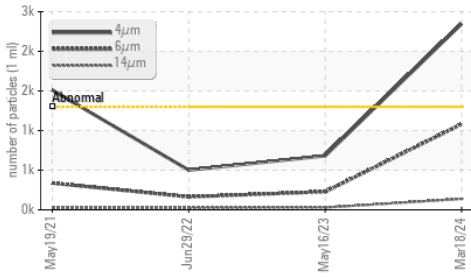


Particle Trend

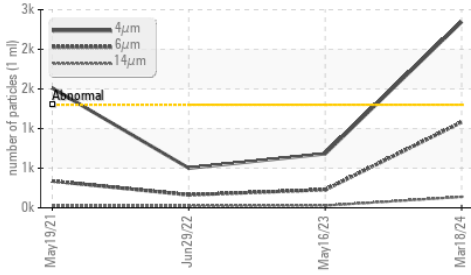

Acid Number

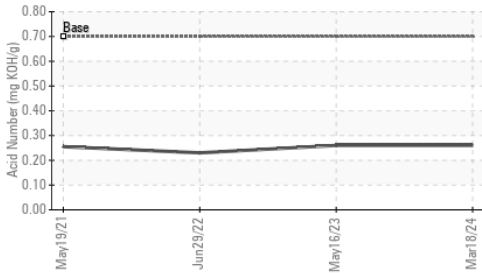

Viscosity @ 40°C

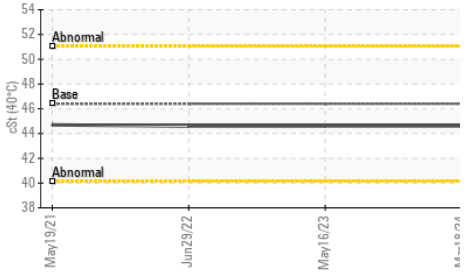

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	0.26	0.26	0.23


VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46.4	44.6	44.6	44.6

SAMPLE IMAGES

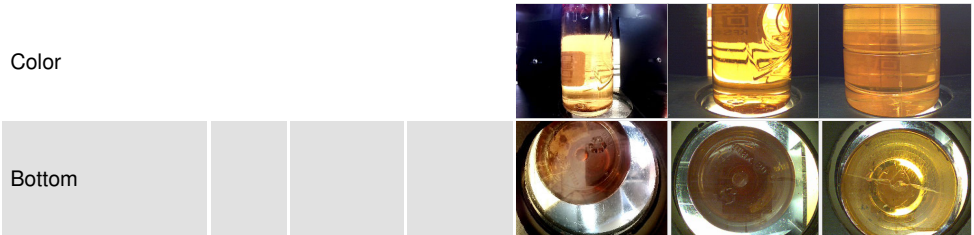


GRAPHS


Ferrous Alloys

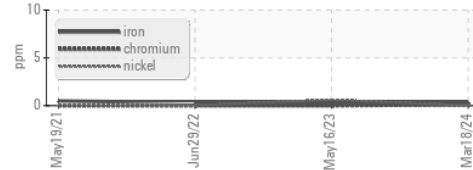


Non-ferrous Metals

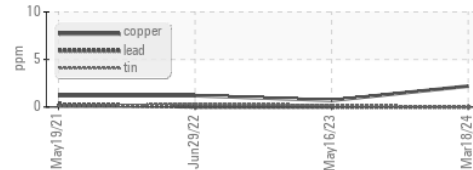

Viscosity @ 40°C

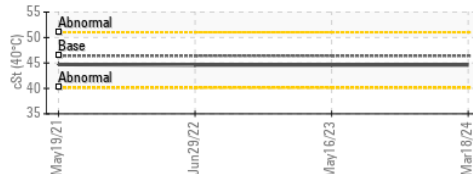

Particle Count

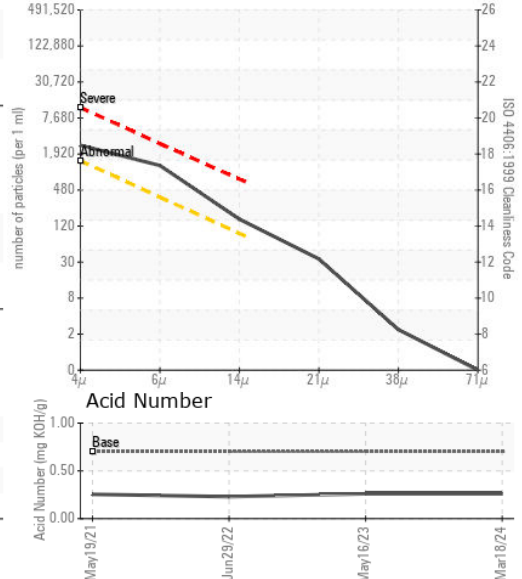

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KFS0005118
 Lab Number : **06124837**
 Unique Number : 10938988
 Test Package : IND 2

Received : 21 Mar 2024
 Tested : 22 Mar 2024
 Diagnosed : 22 Mar 2024 - Wes Davis

VIAM/VICAM Manufacturing - Tennessee
 87 Parktower Road
 Manchester, TN
 US 37355
 Contact: Eric Thompson
 ethompson@viammfg.com
 T: (931)461-2300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)