



# OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Area  
**VIAM/Main Floor**  
Machine Id  
**[VIAM^Main Floor] EXT 3 NIB PRESS**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA HYDREX AW 46 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### ● Fluid Condition

The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KFS0005112</b>	KFS0002207	---
Sample Date	Client Info	<b>18 Mar 2024</b>	16 May 2023	---
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	---
Sample Status		<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	<b>1</b>	2
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0
Silver	ppm	ASTM D5185m		<b>0</b>	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	<1
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0
Copper	ppm	ASTM D5185m	>20	<b>5</b>	2
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>0</b>	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	3
Calcium	ppm	ASTM D5185m	50	<b>0</b>	<1
Phosphorus	ppm	ASTM D5185m	330	<b>45</b>	50
Zinc	ppm	ASTM D5185m	430	<b>51</b>	51
Sulfur	ppm	ASTM D5185m	760	<b>3687</b>	4143

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	<b>▲ 27273</b>	▲ 40792
Particles >6µm	ASTM D7647	>320	<b>▲ 2415</b>	▲ 3777
Particles >14µm	ASTM D7647	>80	<b>79</b>	23
Particles >21µm	ASTM D7647	>20	<b>21</b>	6
Particles >38µm	ASTM D7647	>4	<b>3</b>	1
Particles >71µm	ASTM D7647	>3	<b>0</b>	0
Oil Cleanliness	ISO 4406 (c)	>17/15/13	<b>▲ 22/18/13</b>	▲ 23/19/12

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	<b>0.10</b>	0.20


# OIL ANALYSIS REPORT

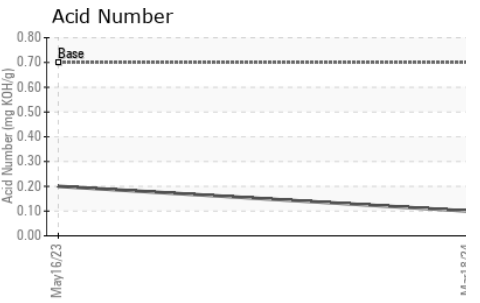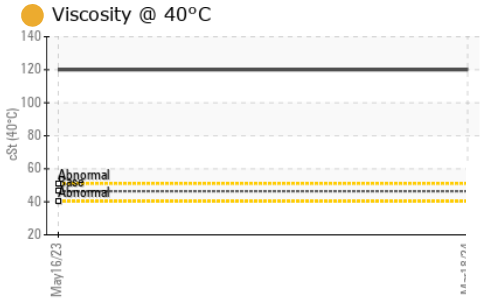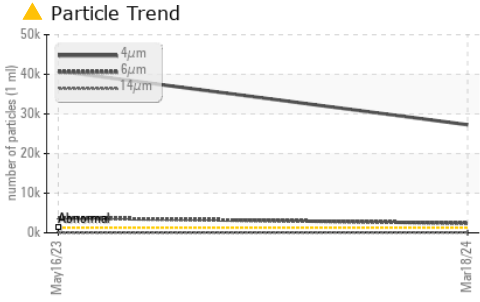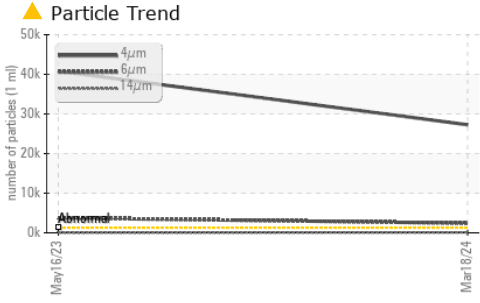






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46.4	<b>120</b>	120	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

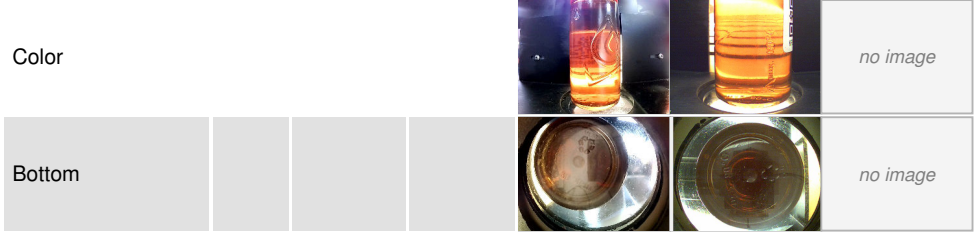

### GRAPHS

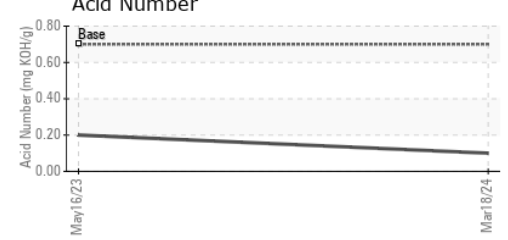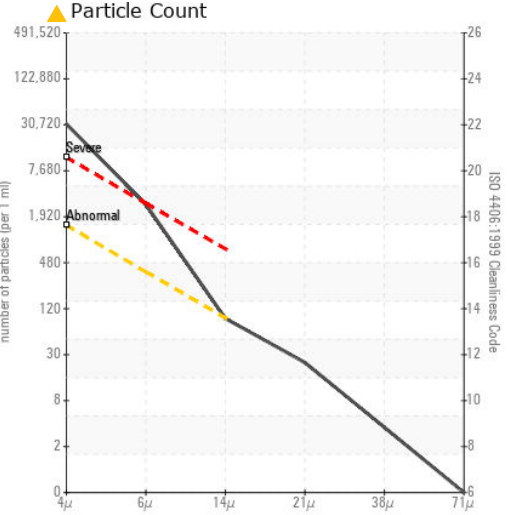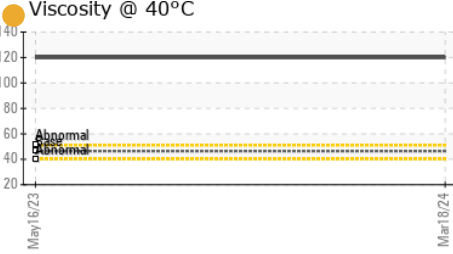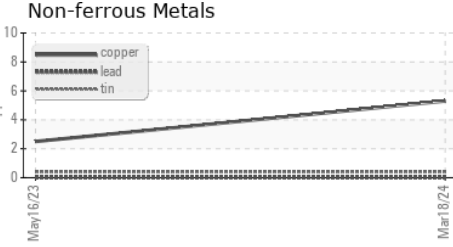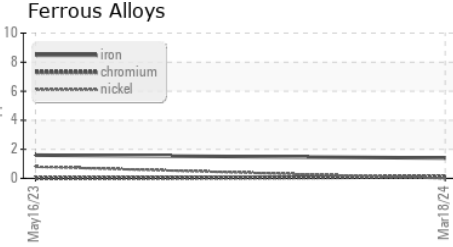

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KFS0005112 **Received** : 21 Mar 2024  
**Lab Number** : 06124838 **Tested** : 22 Mar 2024  
**Unique Number** : 10938989 **Diagnosed** : 24 Mar 2024 - Don Baldrige  
**Test Package** : IND 2

**VIAM/VICAM Manufacturing - Tennessee**  
 87 Parktower Road  
 Manchester, TN  
 US 37355  
 Contact: Eric Thompson  
 ethompson@viammfg.com  
 T: (931)461-2300  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)