




# OIL ANALYSIS REPORT

Sample Rating Trend

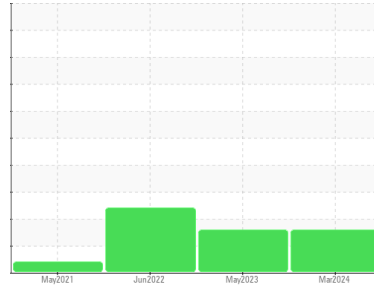

ISO



Area  
**VICAM**  
Machine Id  
**[VICAM] BALER - VICAM**  
Component  
**Hydraulic System**  
Fluid  
**PETRO CANADA HYDREX AW 46 (120 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KFS0005069</b>	KFS0002387	KFS0001635
Sample Date	Client Info	<b>18 Mar 2024</b>	16 May 2023	28 Jun 2022
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>0</b>	5	<1
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>0</b>	<1	0
Lead	ppm ASTM D5185m >20	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >20	<b>2</b>	4	3
Tin	ppm ASTM D5185m >20	<b>&lt;1</b>	0	0
Antimony	ppm ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 0	<b>0</b>	0	0
Calcium	ppm ASTM D5185m 50	<b>46</b>	35	42
Phosphorus	ppm ASTM D5185m 330	<b>329</b>	341	330
Zinc	ppm ASTM D5185m 430	<b>431</b>	367	416
Sulfur	ppm ASTM D5185m 760	<b>978</b>	1217	1340

## CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>&lt;1</b>	1	<1
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Potassium	ppm ASTM D5185m >20	<b>0</b>	0	0

## FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >1300	<b>2363</b>	6202	21883
Particles >6µm	ASTM D7647 >320	<b>816</b>	368	5525
Particles >14µm	ASTM D7647 >80	<b>92</b>	3	502
Particles >21µm	ASTM D7647 >20	<b>20</b>	2	107
Particles >38µm	ASTM D7647 >4	<b>0</b>	0	9
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >17/15/13	<b>18/17/14</b>	20/16/9	22/20/16

# OIL ANALYSIS REPORT


### ▲ Particle Trend

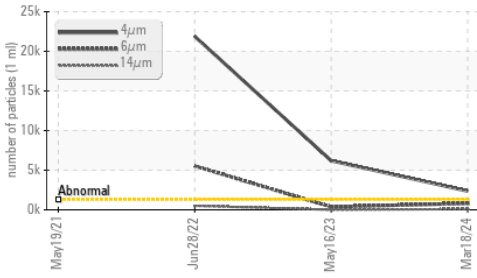


### ▲ Particle Trend

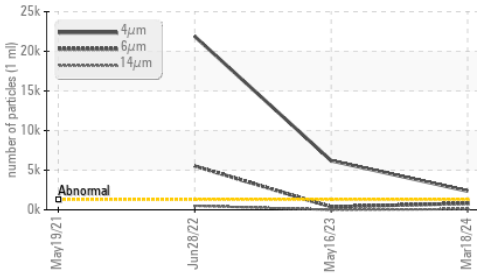

### Acid Number

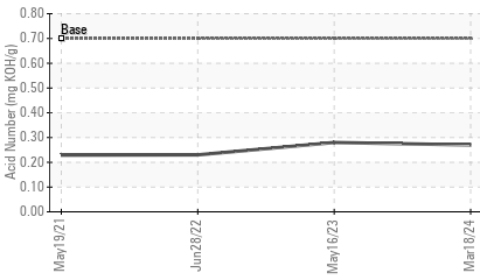

### Viscosity @ 40°C

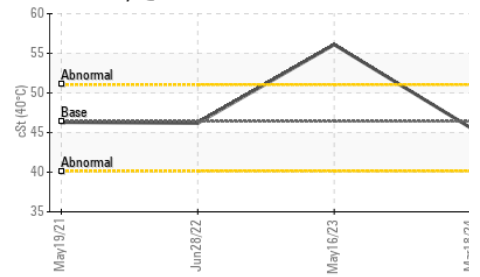

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	<b>0.27</b>	0.28	0.23


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46.4	<b>45.6</b>	▲ 56.1	46.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color

Bottom

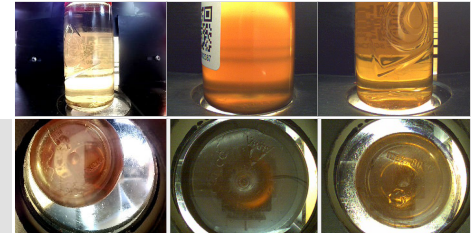


### GRAPHS


#### Ferrous Alloys

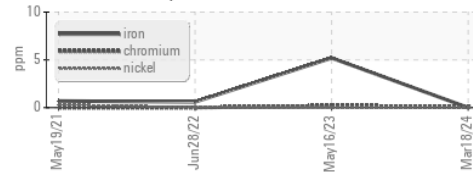


#### Non-ferrous Metals

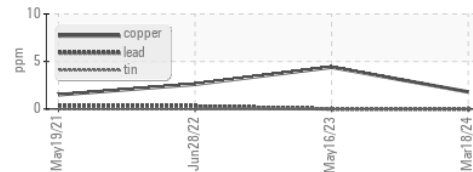

#### Viscosity @ 40°C

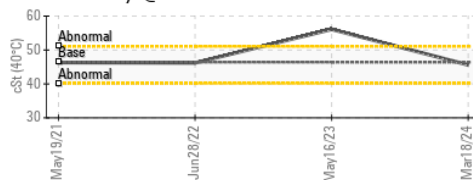

#### ▲ Particle Count

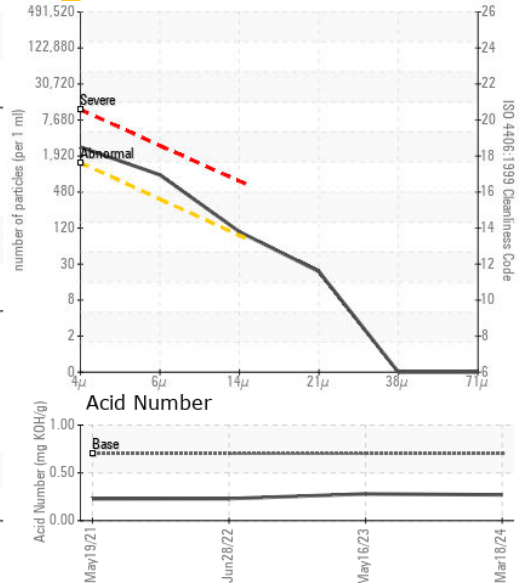

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KFS0005069  
**Lab Number** : 06124854  
**Unique Number** : 10939005  
**Test Package** : IND 2

**Received** : 21 Mar 2024  
**Tested** : 22 Mar 2024  
**Diagnosed** : 22 Mar 2024 - Wes Davis

**VIAM/VICAM Manufacturing - Tennessee**  
 87 Parktower Road  
 Manchester, TN  
 US 37355  
 Contact: Eric Thompson  
 ethompson@viammfg.com  
 T: (931)461-2300  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)