

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

DEHYDRATED OIL TOTE 5

New (Unused) Oil Fluid AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Mar2024		
SAMPLE INFORM	ATION	method	limit/base		history1	history2
			in the bacco		motory	
Sample Number		Client Info		WC0905633		
Sample Date		Client Info		08 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>5	1		
Chromium	ppm	ASTM D5185m	>5	<1		
Nickel	ppm	ASTM D5185m	>5	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>5	0		
Lead	ppm	ASTM D5185m	>5	0		
Copper	ppm	ASTM D5185m	>5	1		
Tin	ppm	ASTM D5185m	>5	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	<1		
Manganese	ppm	ASTM D5185m	0	<1		
Magnesium		ASTM D5185m	25	0		
-	ppm	ASTM D5185m		-		
Calcium	ppm		200	22		
Phosphorus	ppm	ASTM D5185m	300	206		
Zinc	ppm	ASTM D5185m	370	218		
Sulfur	ppm	ASTM D5185m	2500	555		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	e 8096		
Particles >6µm		ASTM D7647	>1300	162		
Particles >14µm		ASTM D7647	>160	11		
Particles >21µm		ASTM D7647	>40	4		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	0 20/15/11		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.28		
3:11:15) Boy: 1						


Report Id: ALLMONSAF [WUSCAR] 06124869 (Generated: 03/24/2024 13:11:15) Rev: 1


Contact/Location: LENNY LILES - ALLMONSAF




OIL ANALYSIS REPORT





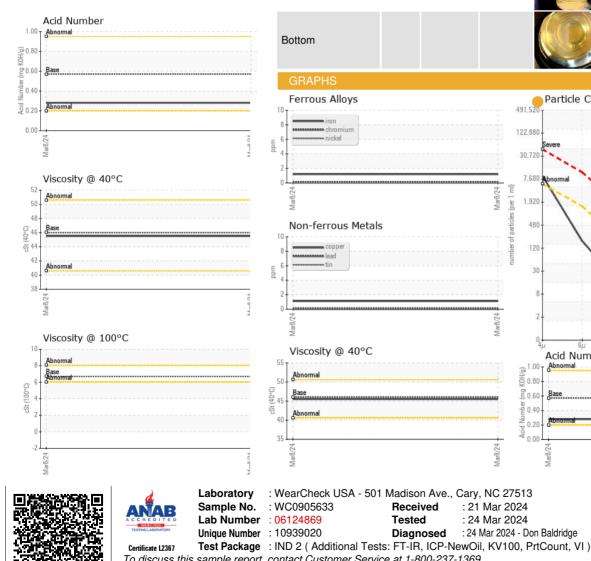

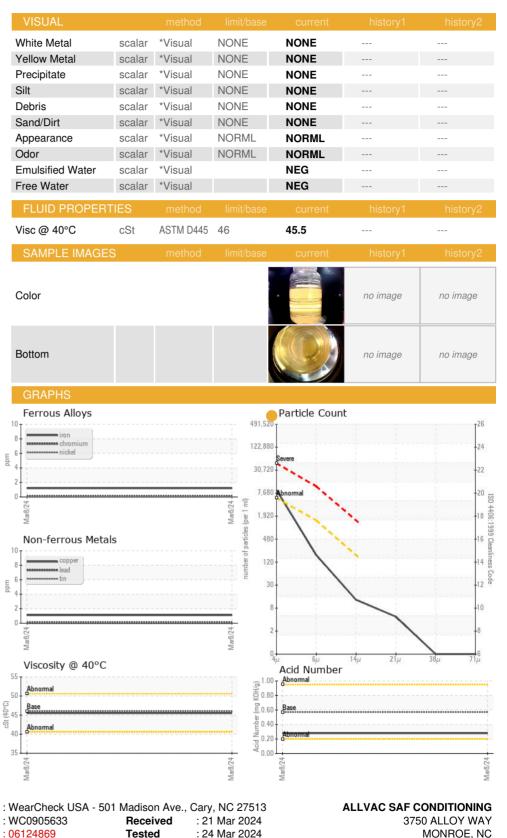

: 24 Mar 2024 - Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed

口袋

Contact/Location: LENNY LILES - ALLMONSAF

US 28110

T:

F:

Contact: LENNY LILES

lenny.liles@atimetals.com