

OIL ANALYSIS REPORT

WH-100 Machine Id B25970 - STORK GEARBOX #5 (3RD ON STERILE SECTION) Component

Gearbox Fluid

PETRO CANADA ENDURATEX WG 680 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

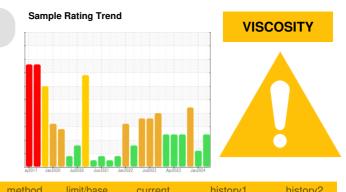

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0894851	WC0880592	WC0856017
Sample Date		Client Info		06 Mar 2024	10 Jan 2024	29 Nov 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	10	13	6
Chromium	ppm	ASTM D5185m	>15	<1	<1	0
Nickel	ppm	ASTM D5185m	>15	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	2	0
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	11	17	16
Tin	ppm	ASTM D5185m	>25	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	-	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	1	0	0	0
Barium	ppm		1	0	3	0
Molybdenum	ppm	ASTM D5185m	1	<1	0	0
Manganese	ppm		1	<1	0	<1
Magnesium	ppm	ASTM D5185m	1	0	0	<1
Calcium	ppm	ASTM D5185m		0	0	<1
Phosphorus	ppm	ASTM D5185m	1	0	48	<1
Zinc	ppm	ASTM D5185m		0	0	10
Sulfur	ppm	ASTM D5185m	3114	3301	2965	2438
CONTAMINANTS		method	limit/base		history1	history2
Silicon	ppm	ASTM D5185m	>50	1	1	<1
Sodium	ppm	ASTM D5185m	00	<1	0	<1
Potassium	ppm	ASTM D5185m		0	<1	0
FLUID CLEANLIN	NESS	method	limit/base		history1	history2
Particles >4µm		ASTM D7647	>10000	▲ 308398	11879	▲ 14093
Particles >6µm		ASTM D7647		A 83285	1578	▲ 7678
Particles >14µm		ASTM D7647	>320	1049	43	1 307
Particles >21µm		ASTM D7647		<u> </u>	11	4 40
Particles >38µm		ASTM D7647	>20	19	0	▲ 68
Particles >71µm		ASTM D7647		2	0	▲ 7
Oil Cleanliness		ISO 4406 (c)	>20/18/15	A 25/24/17	21/18/13	A 21/20/18
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.43	1.17	1.60	1.55

Contact/Location: RYAN LOWE - HORAUS



100

200

2

(B/HO)

(Buu)

Number 1

Acid

/lay21//


May21/


Jan 1

Acid Number

an13/71

OIL ANALYSIS REPORT

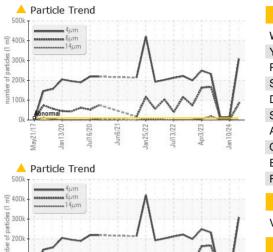





In6/71


m25/22

Jan 25/22

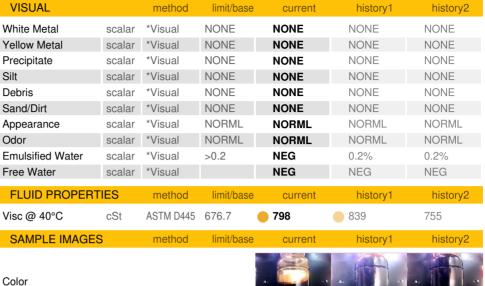



Bottom

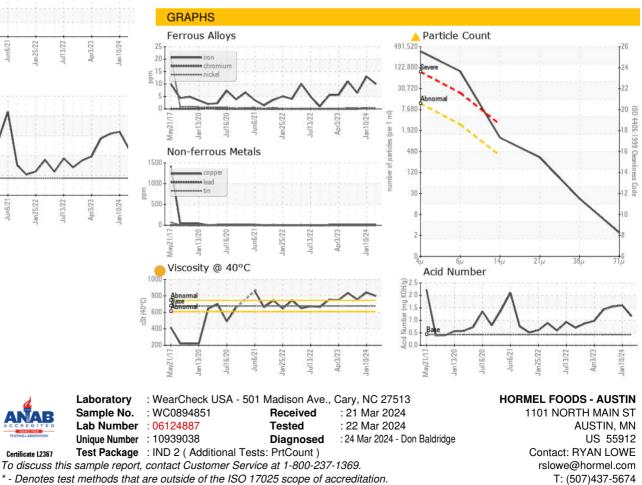

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: RYAN LOWE - HORAUS

F: (507)437-9805