




OIL ANALYSIS REPORT

Sample Rating Trend

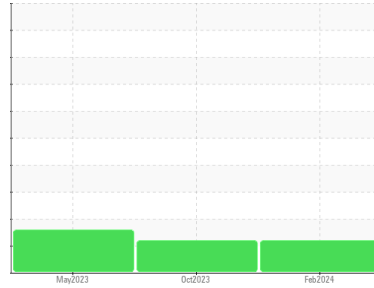

ISO



Area
PITT OHIO
Machine Id
PITT OHIO D2682
Component
Front Differential
Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900848	WC0876014	WC0828721
Sample Date	Client Info		19 Feb 2024	19 Oct 2023	22 May 2023
Machine Age	mls	Client Info	101481	51574	72
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	122	83	9
Chromium	ppm	ASTM D5185m >10	<1	<1	0
Nickel	ppm	ASTM D5185m >10	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	0	<1	<1
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	2	<1	0
Tin	ppm	ASTM D5185m >10	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	91	94	116
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	0	0
Manganese	ppm	ASTM D5185m	8	8	2
Magnesium	ppm	ASTM D5185m	161	172	181
Calcium	ppm	ASTM D5185m	1	2	0
Phosphorus	ppm	ASTM D5185m	1749	1756	1693
Zinc	ppm	ASTM D5185m	0	0	0
Sulfur	ppm	ASTM D5185m	28569	25475	25056

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	35	34	3
Sodium	ppm	ASTM D5185m	3	3	0
Potassium	ppm	ASTM D5185m >20	0	0	0
Water	%	ASTM D6304 >.2	0.019	0.015	0.029
ppm Water	ppm	ASTM D6304 >2000	191	159	290.0

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 112986	▲ 115795	▲ 132540
Particles >6µm	ASTM D7647	>5000	● 6414	▲ 16432	▲ 44230
Particles >14µm	ASTM D7647	>640	267	50	▲ 864
Particles >21µm	ASTM D7647	>160	67	12	128
Particles >38µm	ASTM D7647	>40	2	1	3
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/20/15	▲ 24/21/13	▲ 24/23/17

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.84	0.56	0.86




OIL ANALYSIS REPORT

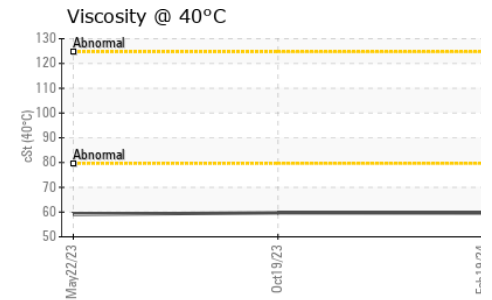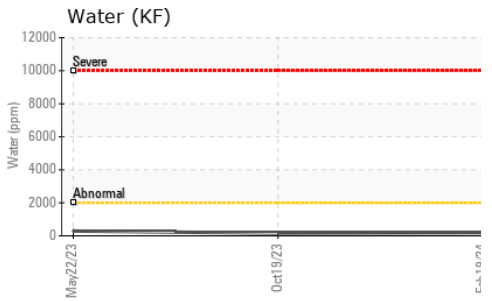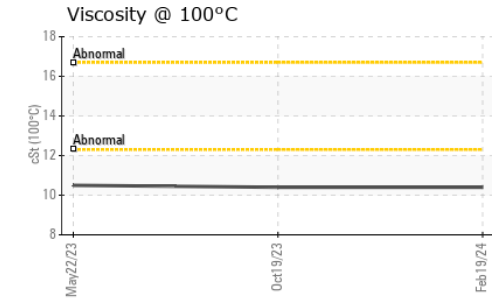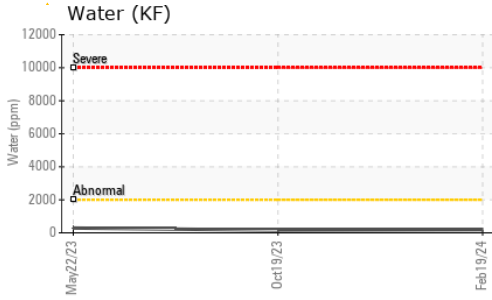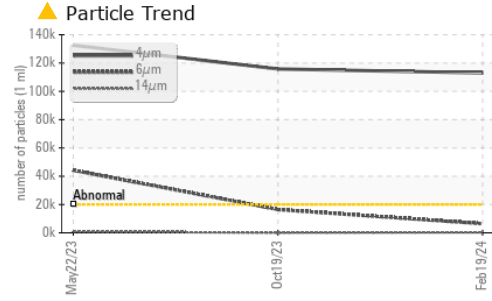






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	59.6	59.7	59.1
Visc @ 100°C	cSt	ASTM D445	10.4	10.4	10.5
Viscosity Index (VI)	Scale	ASTM D2270	164	164	168

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

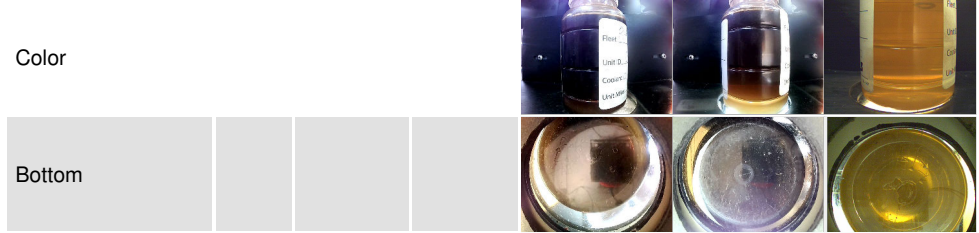

GRAPHS

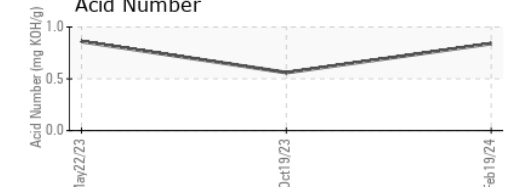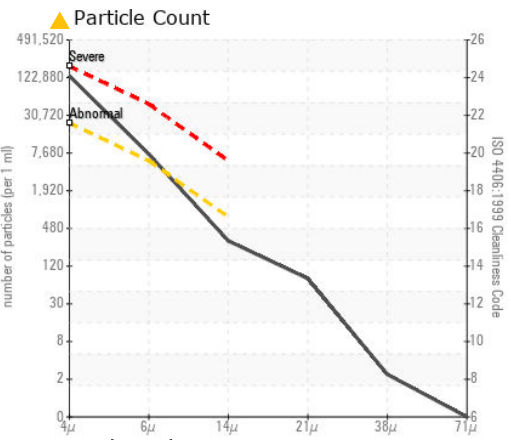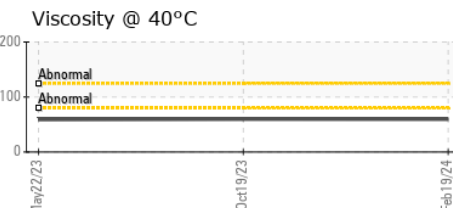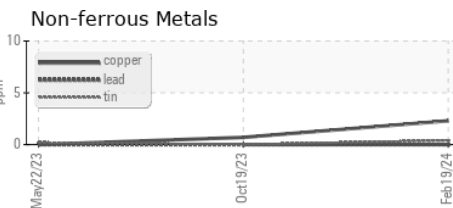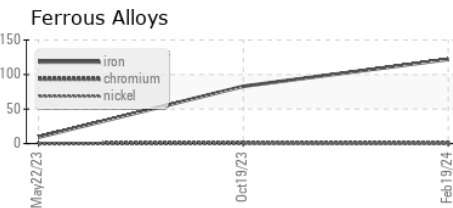

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0900848 Received : 21 Mar 2024
 Lab Number : 06124907 Tested : 22 Mar 2024
 Unique Number : 10939058 Diagnosed : 26 Mar 2024 - Jonathan Hester
 Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: