



OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Area
PLOGER
 Machine Id
6186 - PLOGER
 Component
Rear Differential
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Gear wear is indicated.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0900853	---	---
Sample Date	Client Info	09 Jan 2024	---	---
Machine Age	mls Client Info	488389	---	---
Oil Age	mls Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >500	▲ 1295	---	---
Chromium ppm	ASTM D5185m >10	▲ 13	---	---
Nickel ppm	ASTM D5185m >10	10	---	---
Titanium ppm	ASTM D5185m	<1	---	---
Silver ppm	ASTM D5185m	0	---	---
Aluminum ppm	ASTM D5185m >25	9	---	---
Lead ppm	ASTM D5185m >25	0	---	---
Copper ppm	ASTM D5185m >100	6	---	---
Tin ppm	ASTM D5185m >10	<1	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	74	---	---
Barium ppm	ASTM D5185m	0	---	---
Molybdenum ppm	ASTM D5185m	1	---	---
Manganese ppm	ASTM D5185m	17	---	---
Magnesium ppm	ASTM D5185m	185	---	---
Calcium ppm	ASTM D5185m	32	---	---
Phosphorus ppm	ASTM D5185m	1771	---	---
Zinc ppm	ASTM D5185m	6	---	---
Sulfur ppm	ASTM D5185m	28600	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >75	29	---	---
Sodium ppm	ASTM D5185m	10	---	---
Potassium ppm	ASTM D5185m >20	0	---	---
Water %	ASTM D6304 >.2	0.038	---	---
ppm Water	ASTM D6304 >2000	386	---	---

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	▲ 203807	---	---
Particles >6µm	ASTM D7647 >5000	▲ 14116	---	---
Particles >14µm	ASTM D7647 >640	71	---	---
Particles >21µm	ASTM D7647 >160	11	---	---
Particles >38µm	ASTM D7647 >40	0	---	---
Particles >71µm	ASTM D7647 >10	0	---	---
Oil Cleanliness	ISO 4406 (c) >21/19/16	▲ 25/21/13	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	1.84	---	---



OIL ANALYSIS REPORT

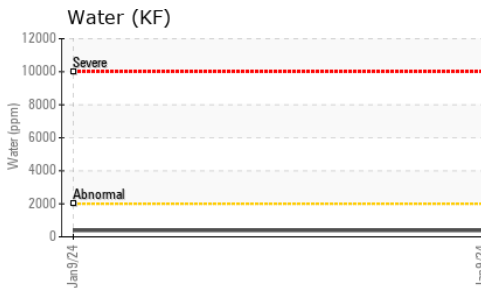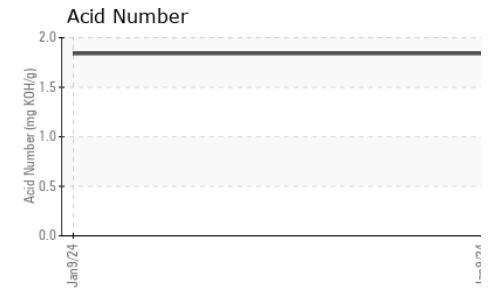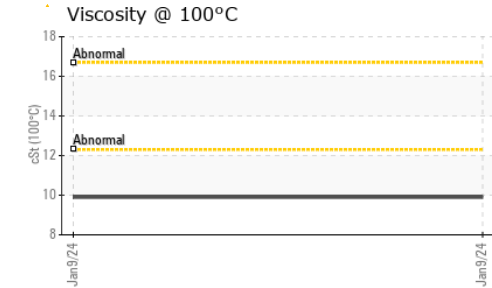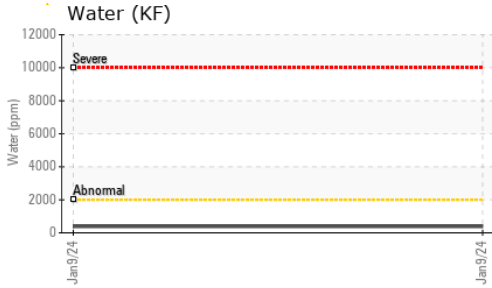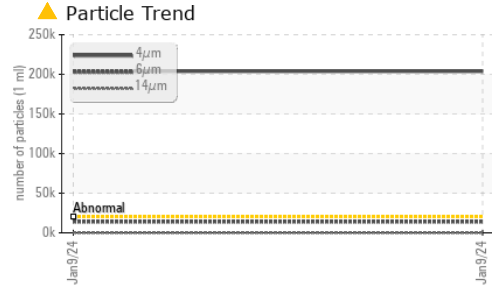





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	53.5	---	---
Visc @ 100°C	cSt	ASTM D445	9.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270	174	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

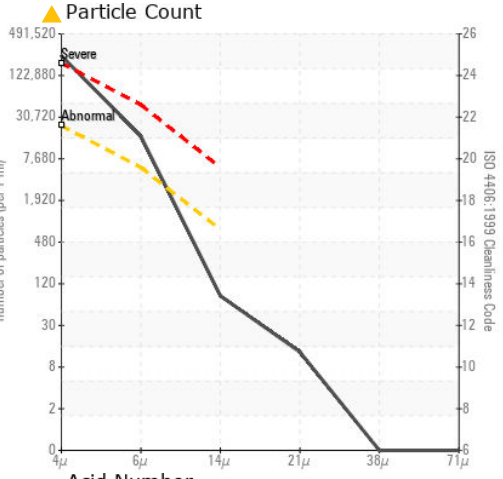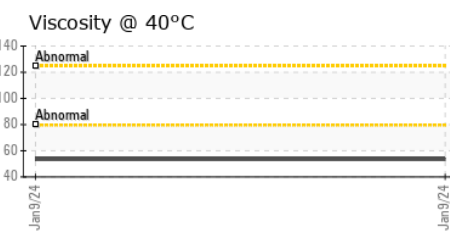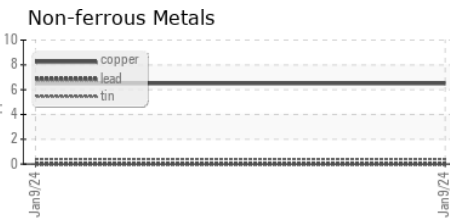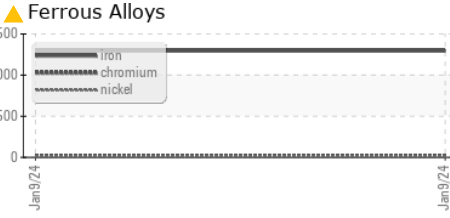

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0900853 Received : 21 Mar 2024
 Lab Number : 06124915 Tested : 22 Mar 2024
 Unique Number : 10939066 Diagnosed : 26 Mar 2024 - Jonathan Hester
 Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: