




OIL ANALYSIS REPORT

Sample Rating Trend

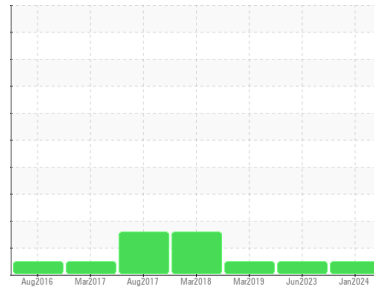

NORMAL

Machine Id
66319 (S/N 61021476)
 Component
Hydraulic System
 Fluid
FIRE-RESISTANT FLUID ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			RP0030238	RP0016430	RP194019
Sample Date	Client Info			02 Jan 2024	23 Jun 2023	13 Mar 2019
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	3	2	3
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>20	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	<1	<1
Copper	ppm	ASTM D5185m	>20	7	6	4
Tin	ppm	ASTM D5185m	>20	<1	<1	0
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	<1
Barium	ppm	ASTM D5185m	5	0	1	1
Molybdenum	ppm	ASTM D5185m	5	<1	<1	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	5	0	2	<1
Calcium	ppm	ASTM D5185m	50	94	97	135
Phosphorus	ppm	ASTM D5185m	175	423	424	433
Zinc	ppm	ASTM D5185m	62	582	591	601

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	1
Sodium	ppm	ASTM D5185m		2	0	2
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Water	%	ASTM D6304	>55	0.003	0.012	0.004
ppm Water	ppm	ASTM D6304	>55000	32	129.3	40

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	713	554	236
Particles >6µm		ASTM D7647	>1300	193	162	61
Particles >14µm		ASTM D7647	>160	16	11	8
Particles >21µm		ASTM D7647	>40	5	3	2
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/11	16/15/11	15/13/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	3.63	0.79	0.68	0.959


OIL ANALYSIS REPORT

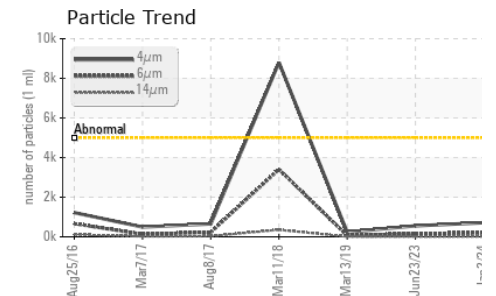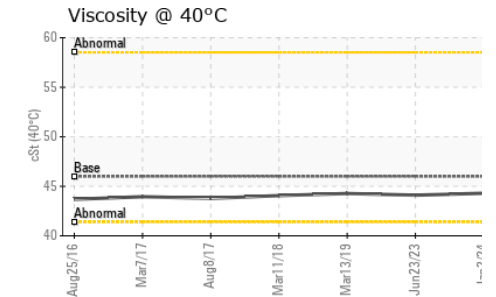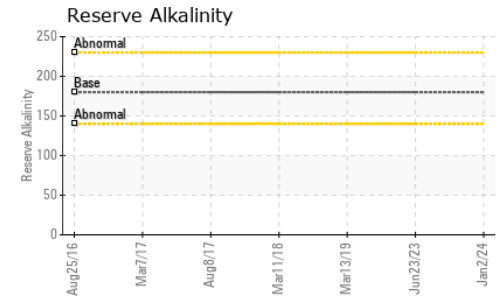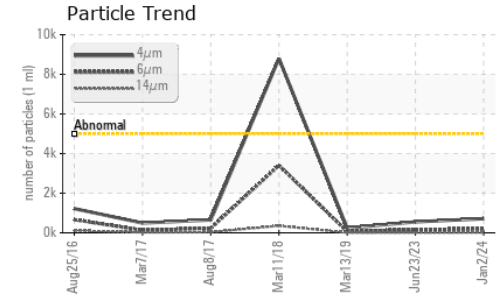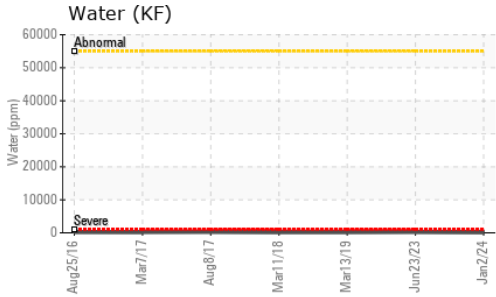






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>55	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.3	44.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

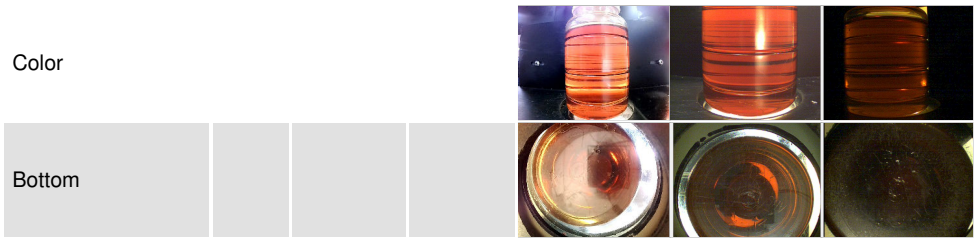

GRAPHS

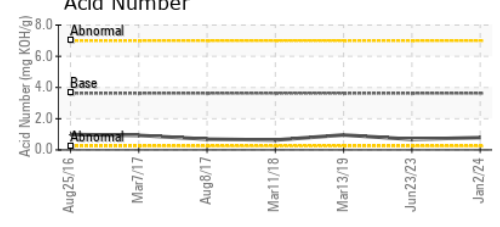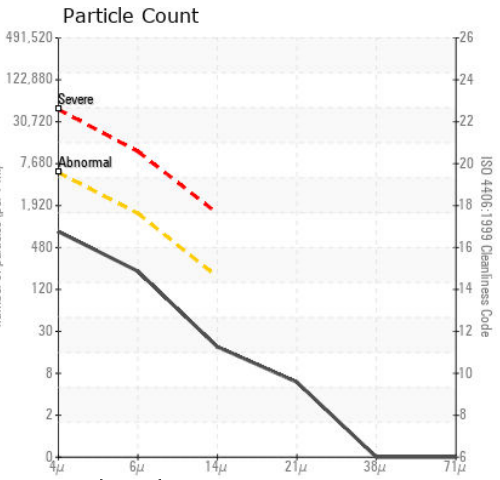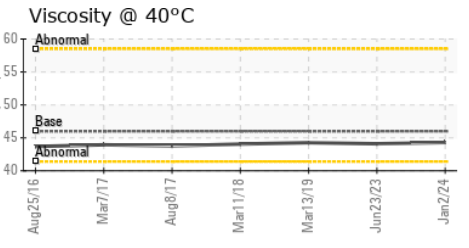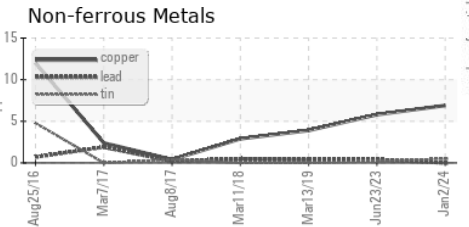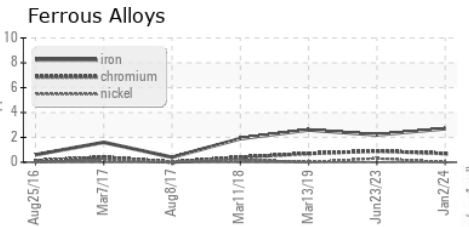

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0030238 **Received** : 21 Mar 2024
Lab Number : 06124941 **Tested** : 24 Mar 2024
Unique Number : 10939092 **Diagnosed** : 24 Mar 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: pH, ReserveAlk)

YANFENG GLOBAL INTERIORS
 42150 EXECUTIVE DR
 HARRISON TWP, MI
 US 48045
 Contact: RYAN FRANK
 ryan.frank01@yanfeng.com
 T: (586)638-8350
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)