


# PROBLEM SUMMARY

Sample Rating Trend


**WEAR**

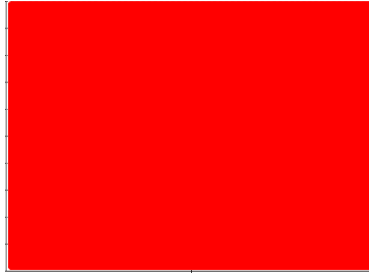


Area  
**NELSON PG 32**  
Machine Id  
**SULLAIR 003-129976 - GKN DRIVELINE**  
Component  
**Compressor**

## COMPONENT CONDITION SUMMARY


### ▲ Acid Number

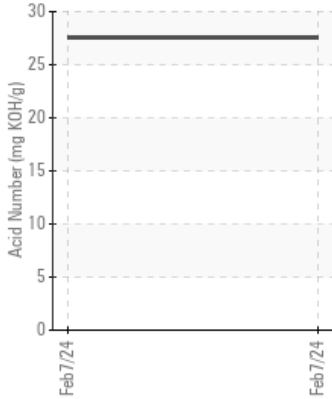


### ▲ Ferrous Alloys

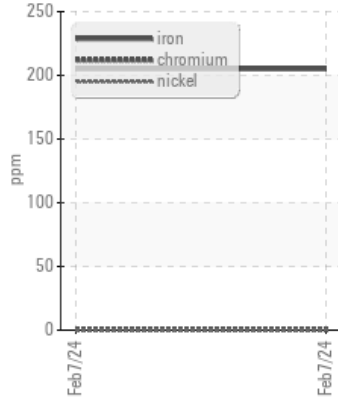

### ● Water (KF)

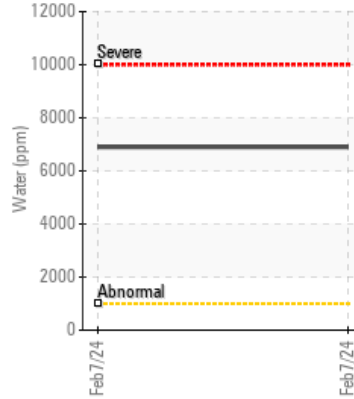

### ● Viscosity @ 40°C

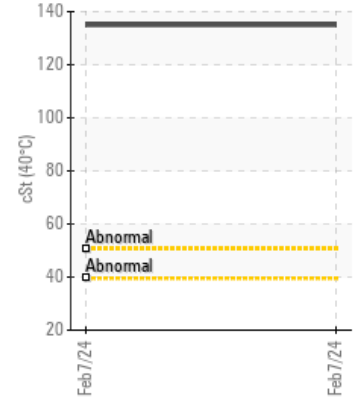

## RECOMMENDATION

We advise that you check for a possible overheat condition. We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>SEVERE</b>	---	---
Iron	ppm	ASTM D5185m	>50	<b>▲ 205</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>▲ 27.57</b>	---	---

Customer Id: UCLEWCHA  
Sample No.: UCH06125003  
Lab Number: 06125003  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Inspect Wear Source	---	---	?	We advise that you inspect for the source(s) of wear.
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check For Overheating	---	---	?	We advise that you check for a possible overheat condition.


## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend

**WEAR**

Area  
**NELSON PG 32**  
Machine Id  
**SULLAIR 003-129976 - GKN DRIVELINE**  
Component  
**Compressor**

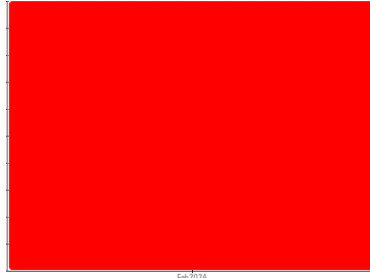

## DIAGNOSIS

### ▲ Recommendation

We advise that you check for a possible overheat condition. We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

### ▲ Wear

The iron level is severe.

### ● Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a moderate amount of visible silt present in the sample. There is a moderate concentration of water present in the oil.

### ▲ Fluid Condition

The AN level is above the recommended limit. The oil viscosity is higher than normal. TAN level indicates possible presence of varnish. The oil is no longer serviceable.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>UCH06125003</b>	---	---
Sample Date	Client Info			<b>07 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>34198</b>	---	---
Oil Age	hrs	Client Info		<b>2655</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>SEVERE</b>	---	---





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>▲ 205</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>7</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>4</b>	---	---
Barium	ppm	ASTM D5185m		<b>3</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>5</b>	---	---
Calcium	ppm	ASTM D5185m		<b>31</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>202</b>	---	---
Zinc	ppm	ASTM D5185m		<b>129</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>176</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>31</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water	%	ASTM D6304	>0.1	<b>● 0.690</b>	---	---
ppm Water	ppm	ASTM D6304	>1000	<b>● 6900</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>▲ 27.57</b>	---	---

# OIL ANALYSIS REPORT

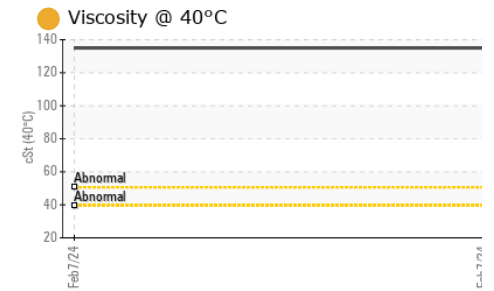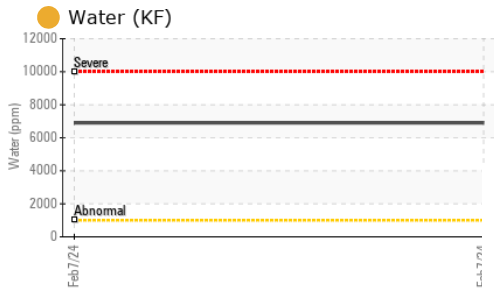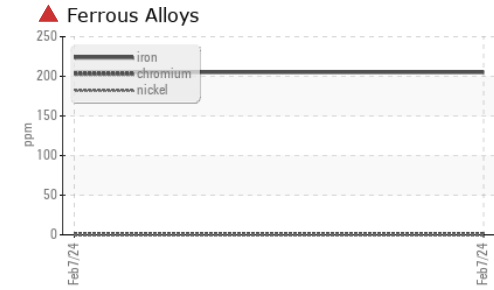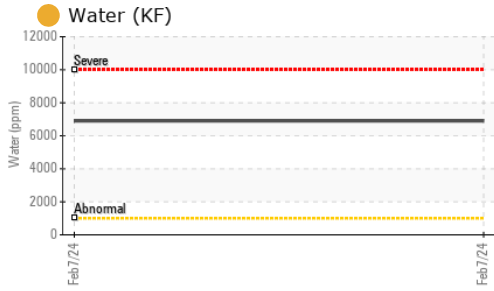





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	---	---
Debris	scalar	*Visual	NONE	<b>MODER</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>0.2%</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>135</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

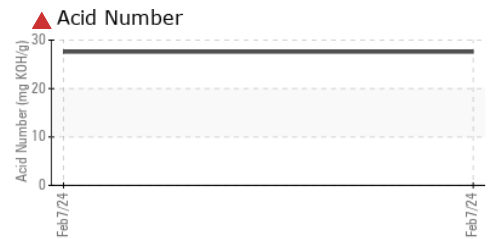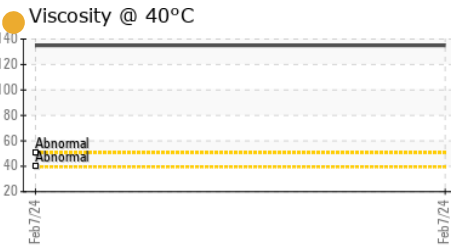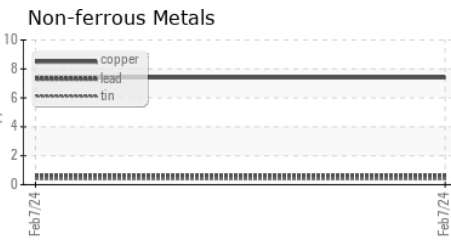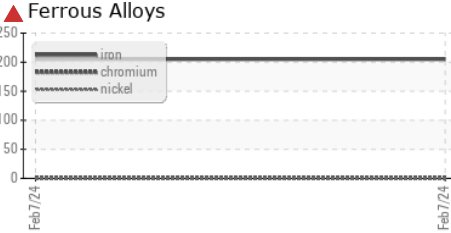

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCH06125003 **Received** : 21 Mar 2024  
**Lab Number** : **06125003** **Tested** : 25 Mar 2024  
**Unique Number** : 10939154 **Diagnosed** : 26 Mar 2024 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF )

**LEWIS SYSTEMS & SERVICE CO INC**  
 9300 STOCKPORT PL  
 CHARLOTTE, NC  
 US 28273  
 Contact: JOE KERLEY  
 jkerley@lewisystemsinc.com  
 T: (704)588-2299  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)