


OIL ANALYSIS REPORT

PALLUBE 32

SULLIVAN PALATEK 21FE002269 - WEST MEMPHIS STEEL

Component

Compressor

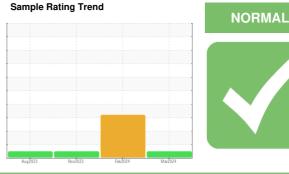

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


	Aug 2023 Nov2023 Feb 2024 Mar 2024						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		UCS06125008	UCS06095691	UCS06016580	
Sample Date		Client Info		06 Mar 2024	13 Feb 2024	15 Nov 2023	
Machine Age	hrs	Client Info		9802	9516	8277	
Oil Age	hrs	Client Info		0	2469	1200	
Oil Changed		Client Info		Changed	Not Changd	Not Changd	
Sample Status				NORMAL	SEVERE	NORMAL	
CONTAMINATION	V	method	limit/base	current	history1	history2	
Water		WC Method	>0.1	NEG	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	0	8	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	0	
Nickel	ppm	ASTM D5185m		0	0	<1	
Titanium	ppm	ASTM D5185m		<1	0	0	
Silver	ppm	ASTM D5185m		<1	0	0	
Aluminum	ppm	ASTM D5185m	>25	3	<1	<1	
Lead	ppm	ASTM D5185m	>25	0	2	0	
Copper	ppm	ASTM D5185m	>50	<1	1	0	
Tin	ppm	ASTM D5185m	>15	<1	<1	1	
Vanadium	ppm	ASTM D5185m		<1	0	0	
Cadmium	ppm	ASTM D5185m		<1	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	1	0	<1	0	
Barium	ppm	ASTM D5185m	730	613	150	356	
Molybdenum	ppm	ASTM D5185m	0	0	0	0	
Manganese	ppm	ASTM D5185m	0.0	0	<1	<1	
Magnesium	ppm	ASTM D5185m	0	2	0	2	
Calcium	ppm	ASTM D5185m	0	9	0	9	
Phosphorus	ppm	ASTM D5185m	0	9	0	7	
Zinc	ppm	ASTM D5185m	0	3	0	0	
Sulfur	ppm	ASTM D5185m	590	737	251	529	
CONTAMINANTS	;	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1	
Sodium	ppm	ASTM D5185m		7	63	75	
Potassium	ppm	ASTM D5185m	>20	3	5	7	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.14	0.062	▲ 2.67	0.39	

Sullivan

OIL ANALYSIS REPORT

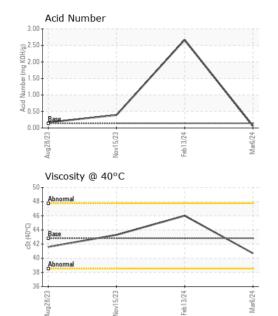

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	42.8	40.7	46.0	43.3
SAMPLE IMAGES		method	limit/base	current	history1	history2

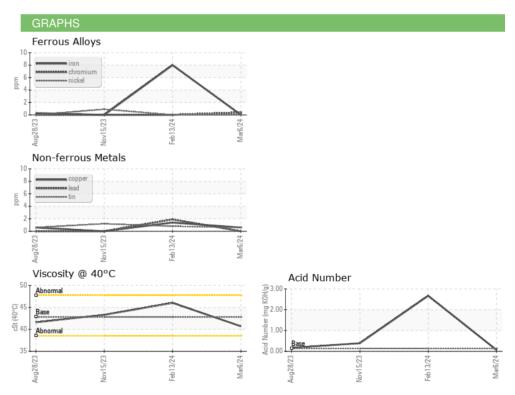





Certificate L2367

Laboratory Sample No.

Lab Number : 06125008

Unique Number: 10939159 Test Package : IND 2

Color

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : UCS06125008 Received : 21 Mar 2024

Tested Diagnosed

: 25 Mar 2024 : 25 Mar 2024 - Sean Felton **BLAKE AND PENDLETON** MEMPHIS, TN

US 38133 Contact: JAY GIANNINI

JGIANNINI@BLAKEANDPENDLETON.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: