



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**RSD-106**  
 Component  
**Rear Differential**  
 Fluid  
**DYNA 300 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number      | Client Info |             |            | <b>WC06125249</b>  | ---      | ---      |
| Sample Date        | Client Info |             |            | <b>04 Mar 2024</b> | ---      | ---      |
| Machine Age        | hrs         | Client Info |            | <b>1238</b>        | ---      | ---      |
| Oil Age            | hrs         | Client Info |            | <b>1238</b>        | ---      | ---      |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | ---      | ---      |
| Sample Status      |             |             |            | <b>NORMAL</b>      | ---      | ---      |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >.2        | <b>NEG</b> | ---      | ---      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >500       | <b>141</b>   | ---      | ---      |
| Chromium    | ppm | ASTM D5185m | >10        | <b>&lt;1</b> | ---      | ---      |
| Nickel      | ppm | ASTM D5185m | >10        | <b>0</b>     | ---      | ---      |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Silver      | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Aluminum    | ppm | ASTM D5185m | >25        | <b>0</b>     | ---      | ---      |
| Lead        | ppm | ASTM D5185m | >25        | <b>0</b>     | ---      | ---      |
| Copper      | ppm | ASTM D5185m | >100       | <b>1</b>     | ---      | ---      |
| Tin         | ppm | ASTM D5185m | >10        | <b>0</b>     | ---      | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |


| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>1</b>     | ---      | ---      |
| Barium     | ppm | ASTM D5185m |            | <b>1</b>     | ---      | ---      |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b>     | ---      | ---      |
| Manganese  | ppm | ASTM D5185m |            | <b>7</b>     | ---      | ---      |
| Magnesium  | ppm | ASTM D5185m |            | <b>1</b>     | ---      | ---      |
| Calcium    | ppm | ASTM D5185m |            | <b>45</b>    | ---      | ---      |
| Phosphorus | ppm | ASTM D5185m |            | <b>2289</b>  | ---      | ---      |
| Zinc       | ppm | ASTM D5185m |            | <b>39</b>    | ---      | ---      |
| Sulfur     | ppm | ASTM D5185m |            | <b>37145</b> | ---      | ---      |

| CONTAMINANTS |     | method      | limit/base | current   | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >75        | <b>13</b> | ---      | ---      |
| Sodium       | ppm | ASTM D5185m |            | <b>7</b>  | ---      | ---      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b>  | ---      | ---      |

| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | *Visual | NONE       | <b>MODER</b> | ---      | ---      |
| Yellow Metal     | scalar | *Visual | NONE       | <b>NONE</b>  | ---      | ---      |
| Precipitate      | scalar | *Visual | NONE       | <b>NONE</b>  | ---      | ---      |
| Silt             | scalar | *Visual | NONE       | <b>MODER</b> | ---      | ---      |
| Debris           | scalar | *Visual | NONE       | <b>NONE</b>  | ---      | ---      |
| Sand/Dirt        | scalar | *Visual | NONE       | <b>NONE</b>  | ---      | ---      |
| Appearance       | scalar | *Visual | NORML      | <b>NORML</b> | ---      | ---      |
| Odor             | scalar | *Visual | NORML      | <b>NORML</b> | ---      | ---      |
| Emulsified Water | scalar | *Visual | >.2        | <b>NEG</b>   | ---      | ---      |
| Free Water       | scalar | *Visual |            | <b>NEG</b>   | ---      | ---      |



# OIL ANALYSIS REPORT

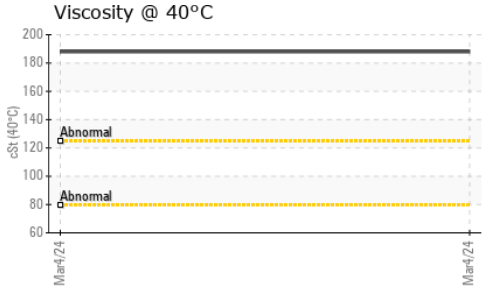




### FLUID PROPERTIES

| method      | limit/base    | current | history1 | history2 |
|-------------|---------------|---------|----------|----------|
| Visc @ 40°C | cSt ASTM D445 | 188     | ---      | ---      |

### SAMPLE IMAGES

| method | limit/base | current  | history1 | history2 |
|--------|------------|----------|----------|----------|
| Color  |            | no image | no image | no image |
| Bottom |            | no image | no image | no image |

### GRAPHS

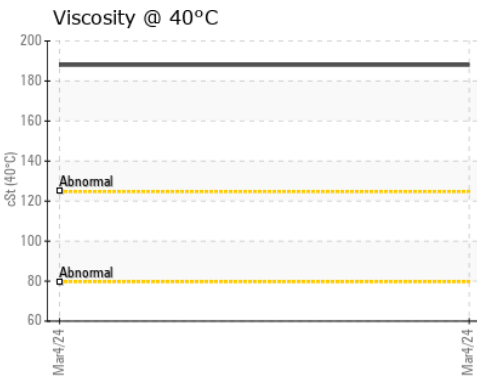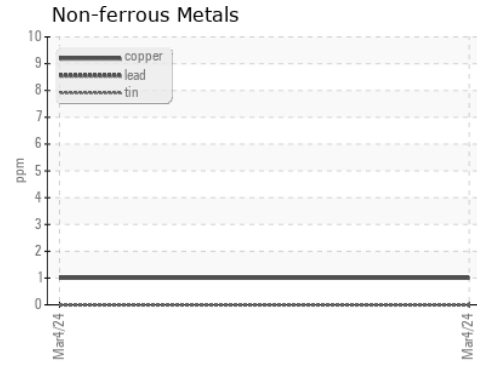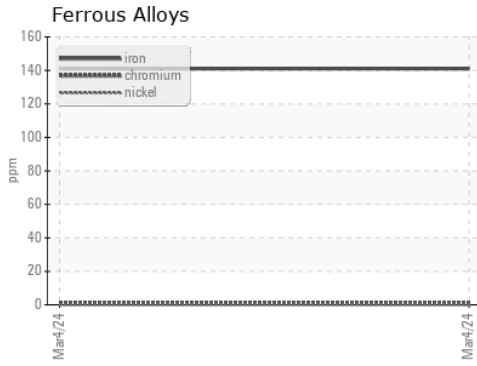

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC06125249 **Received** : 21 Mar 2024  
**Lab Number** : 06125249 **Tested** : 25 Mar 2024  
**Unique Number** : 10939400 **Diagnosed** : 25 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**E.C. PACE CO.**  
 1811 HOLLINS RD.  
 ROANOKE, VA  
 US 24012  
 Contact: EDDIE SECO  
 ESECO@ECPACE.COM  
 T: (276)266-5849  
 F: (540)343-6909

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)