


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



W14 (S/N 31039)

Component Hydraulic System

MIL-PRF-5606H (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Discrete particle counts [100 ml] $5-15\mu m = 26100$, $15-25\mu m = 1300$, $25-50\mu m = 400$, $50-100\mu m = 0$, $>100\mu m = 0$. The water content is negligible. The amount and size of particulates present in the system are acceptable. Chlorine value is 45.1 ppm.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

uE020 AugE020 Oct020 Dec2020 AugE023 NovE023 Feb.2024							
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0874963	WC0874955	WC0874951	
Sample Date		Client Info		06 Mar 2024	06 Feb 2024	09 Jan 2024	
Machine Age	hrs	Client Info		0	0	0	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				NORMAL	NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	0	0	0	
Chromium	ppm	ASTM D5185m	>20	0	0	0	
Nickel	ppm	ASTM D5185m	>20	0	0	0	
Titanium	ppm	ASTM D5185m		0	<1	0	
Silver	ppm	ASTM D5185m		0	0	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	0	
Lead	ppm	ASTM D5185m	>20	0	0	0	
Copper	ppm	ASTM D5185m	>20	0	<1	0	
Tin	ppm	ASTM D5185m	>20	0	<1	<1	
Vanadium	ppm	ASTM D5185m		0	<1	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	0	0	
Magnesium	ppm	ASTM D5185m		0	0	<1	
Calcium	ppm	ASTM D5185m		0	0	2	
Phosphorus	ppm	ASTM D5185m		386	491	479	
Zinc	ppm	ASTM D5185m		3	2	0	
Sulfur	ppm	ASTM D5185m		102	138	149	
CONTAMINANT	S	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	5	5	6	
Sodium	ppm	ASTM D5185m		1	<1	<1	
Potassium	ppm	ASTM D5185m	>20	0	0	0	
Chlorine Content	ppm	ASTM D5185m		45.1	52.3	38.9	
Water	%	ASTM D6304	>0.05	0.002	0.003	0.004	
ppm Water	ppm	ASTM D6304	>500	24	31	46	
FLUID CLEANLII	NESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>5000	1122	3247	1136	
Particles >6µm		ASTM D7647	>1300	278	936	298	
Particles >14μm		ASTM D7647	>160	17	54	33	
Particles >21µm		ASTM D7647	>40	4	12	8	
Particles >38µm		ASTM D7647	>10	0	1	0	
Particles >71µm		ASTM D7647	>3	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/11	19/17/13	17/15/12	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2	

Acid Number (AN)

mg KOH/g ASTM D8045 0.1


Contact/Location: JIM ALLEN - NORPLAMA

0.204


0.068





OIL ANALYSIS REPORT




5k - Αυποιπία 4 μm - 4μm - 5μm - 14μm					
6µm 4k - 14µm					/
1k ok	ر_	\wedge		1	
Jul13/20 Aug25/20	Oct15/20	Dec3/20	Aug8/23	Nov10/23	Feb6/24








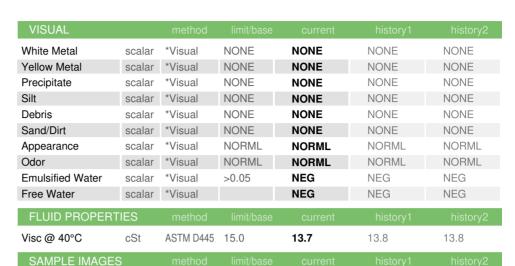

Color		
Bottom		

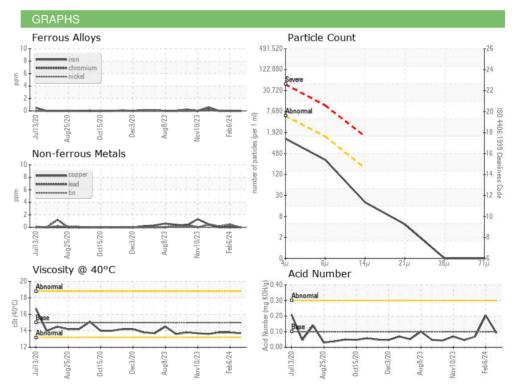

: 21 Mar 2024



Laboratory Sample No. Lab Number

: WC0874963 : 06125295

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received **Tested** Unique Number: 10939446 Diagnosed

: 27 Mar 2024 : 27 Mar 2024 - Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Test Package: IND 2 (Additional Tests: CHLORINEXRF, KF)

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: JIM ALLEN

JALLEN@NWHYDINC.COM

NORTHLAND-WILLETTE INC

T:

F: (508)699-4017

12 HIGH ST

US 02762

PLAINVILLE, MA