

OIL ANALYSIS REPORT

Phosphorus

ppm

ASTM D5185m

Sample Rating Trend

NORMAL

PARKER DRIVE UNIT CONVEYOR POWER PACK

Component

Hydraulic System

TATAN AW 46 (90 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

OR POWER PACK				Jan ² 023	Msz/024		V	
	SAMPLE INFORM	MATION	method	limit/base	current	history1		ł
	Sample Number		Client Info		PH0003338	PH05771927		
	Sample Date		Client Info		01 Mar 2024	08 Jan 2023		
	Machine Age	hrs	Client Info		0	0		
	Oil Age	hrs	Client Info		0	3600		

Oli Age	nrs	Client Info		U	3600	
Oil Changed		Client Info		Filtered	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>30	5	1	
Chromium	ppm	ASTM D5185m	>2	<1	0	
Nickel	ppm	ASTM D5185m	>2	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>2	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>25	2	<1	
Tin	ppm	ASTM D5185m	>20	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		4	5	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m		15	22	
Calcium	ppm	ASTM D5185m		58	61	

Zinc	ppm	ASTM D5185m		313	305	
Sulfur	ppm	ASTM D5185m		744	748	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		1	0	
Potassium	ppm	ASTM D5185m	>20	0	1	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	263	679	
Particles >6µm		ASTM D7647	>2500	47	188	
Particles >14µm		ASTM D7647	>320	10	30	
Particles >21µm		ASTM D7647	>80	5	9	
Particles >38µm		ASTM D7647	>20	0	1	
Particles >71µm		ASTM D7647	>4	0	1	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	15/13/10	17/15/12	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.26	0.27	


293

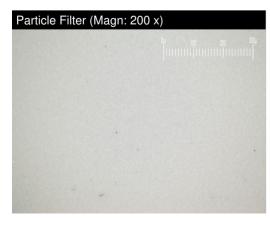

277



OIL ANALYSIS REPORT

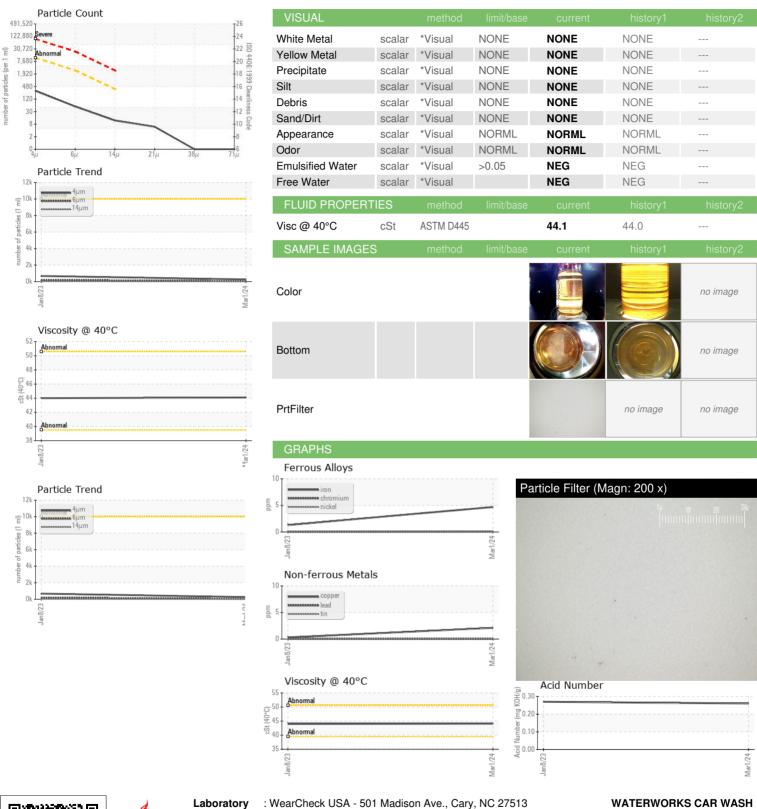





Laboratory Sample No.

: PH0003338

Lab Number : 06125606

Unique Number: 10939757

Diagnosed Test Package: PLANT (Additional Tests: PrtFilter)

Received

Tested

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

WATERWORKS CAR WASH

276 BROADWAY DENVER, CO US 80203

Contact: JON/MARTY info@waterworksdenver.com

T: (303)435-8108

F:

Contact/Location: JON/MARTY ? - WATDENCO

: 21 Mar 2024

: 27 Mar 2024

: 27 Mar 2024 - Jonathan Hester