

OIL ANALYSIS REPORT

Sample Rating Trend

ADDITIVES

MAGENTA NTX [200007685] Machine Id E3

Component Hydraulic System

SHELL TELLUS S4 VX 32 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid.


	MATION					
Sample Number		Client Info		NX012255		
Sample Date		Client Info		05 Jan 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1110	Client Info		N/A		
Sample Status				ATTENTION		
				-		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		11		
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m		0		
Copper	ppm	ASTM D5185m		5		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		7		
Calcium	ppm	ASTM D5185m		<mark> </mark> 26		
Phosphorus	ppm	ASTM D5185m		332		
Zinc	ppm	ASTM D5185m		<u> </u>		
Sulfur	ppm					
	ppm	ASTM D5185m		6651		
CONTAMINANTS		ASTM D5185m method	limit/base	6651 current	 history1	 history2
Silicon	5	method		current	history1	history2
Silicon Sodium	ppm	method ASTM D5185m	>15	current 0	history1	history2
Silicon Sodium Potassium	ppm ppm	method ASTM D5185m ASTM D5185m	>15 >20	current 0 1	history1 	history2
Silicon Sodium Potassium Water	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	>15 >20 >0.05	current 0 1 0	history1 	history2
Silicon Sodium Potassium Water	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>15 >20 >0.05	current 0 1 0 0.003	history1 	history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>15 >20 >0.05 >500	Current 0 1 0 0.003 32	history1 	history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>15 >20 >0.05 >500 limit/base	Current 0 1 0 0.003 32 current	history1 history1	history2 history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>15 >20 >0.05 >500 limit/base	current 0 1 0 0.003 32 current 575	history1 history1 	history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>15 >20 >0.05 >500 limit/base >1300	current 0 1 0 0.003 32 current 575 120	history1 history1	history2 history2 history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	methodASTM D5185mASTM D5185mASTM D6304ASTM D6304MethodASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647	>15 >20 >0.05 >500 limit/base >1300 >160	current 0 1 0 0.003 32 current 575 120 12	history1	history2 history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	methodASTM D5185mASTM D5185mASTM D6304ASTM D6304ASTM D6304ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647	>15 >20 >0.05 >500 limit/base >1300 >160 >40 >10	current 0 1 0 0.003 32 current 575 120 12 4	history1 history1 history1	history2 history2 history2
Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	methodASTM D5185mASTM D5185mASTM D6304ASTM D6304ASTM D6304ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647	>15 >20 >0.05 >500 limit/base >1300 >160 >40 >10	current 0 1 0 0.003 32 current 575 120 12 4 0	history1 history1 history1	history2 history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >38µm Particles >71µm	S ppm ppm % ppm NESS	methodASTM D5185mASTM D5185mASTM D5185mASTM D6304ASTM D6304ASTM D6304ASTM D7647ASTM D7647	>15 >20 >0.05 >500 limit/base >1300 >160 >40 >10 >3	current 0 1 0 0.003 32 current 575 120 12 4 0 0 0	history1 history1 history1	history2 history2 history2


Report Id: NORDEX [WUSCAR] 06125646 (Generated: 03/25/2024 15:14:40) Rev: 1


Contact/Location: DEVIN LINEHAN - NORDEX




OIL ANALYSIS REPORT



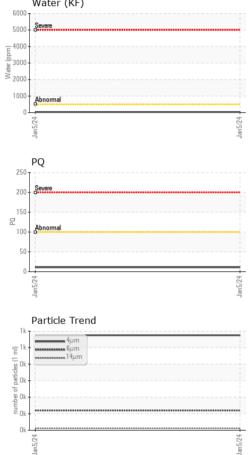



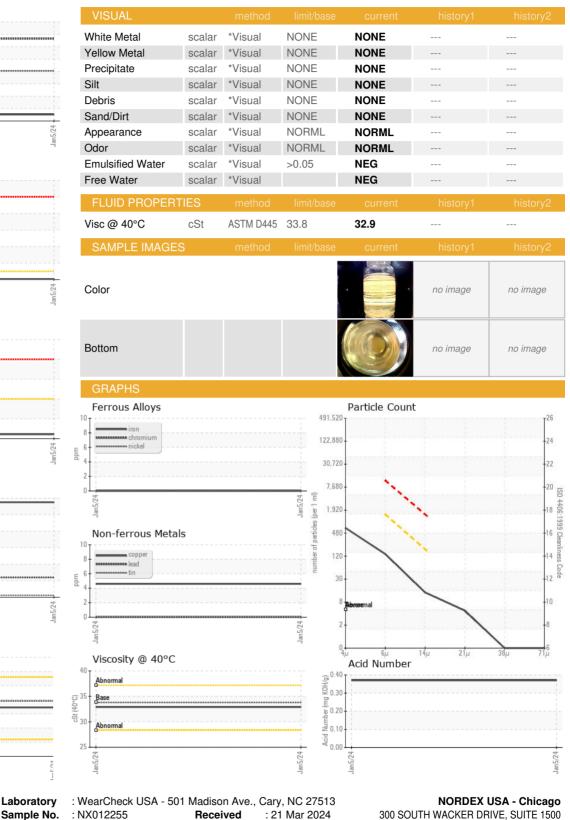



To discuss this sample report, contact Customer Service at 1-800-237-1369. DLinehan@nordex-online.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Tested

Diagnosed

: 22 Mar 2024

: 25 Mar 2024 - Don Baldridge

Certificate L2367

Lab Number

Unique Number : 10939797

: 06125646

Test Package : IND 2 (Additional Tests: KF, PQ)

CHICAGO, IL

T: (312)386-4124

F: (312)386-7102

Contact: DEVIN LINEHAN

US 60606