


OIL ANALYSIS REPORT

Sample Rating Trend

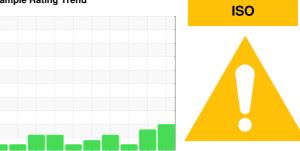

KAESER AS 25 5272773 (S/N 1120)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Mar2016 Dec2	016 Jun2018 Aug2019 Mar2	020 Oct2020 May2021 Dec2021 Aug2	022 Aug2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP48050D	KCP50043	KCP43317
Sample Date		Client Info		01 Aug 2023	05 Aug 2022	13 Dec 2021
Machine Age	hrs	Client Info		29501	24302	21072
Oil Age	hrs	Client Info		0	6088	2858
Oil Changed		Client Info		Changed	Changed	Not Changd
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	9	10	11
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	<1
Barium	ppm	ASTM D5185m	90	0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	<1	0	7
Calcium	ppm	ASTM D5185m	2	0	<1	0
Phosphorus	ppm	ASTM D5185m		0	4	2
Zinc	ppm	ASTM D5185m		3	16	26
Sulfur	ppm	ASTM D5185m		17937	14741	14808
CONTAMINANTS	}	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		1	<1	3
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.004	0.011	0.008
ppm Water	ppm	ASTM D6304	>500	43	113.3	86.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		3416	3443	1911
Particles >6µm		ASTM D7647	>1300	<u> </u>	1273	349
Particles >14μm		ASTM D7647	>80	<u> </u>	<u></u> 163	32
Particles >21μm		ASTM D7647	>20	<u> </u>	▲ 43	11
Particles >38μm		ASTM D7647	>4	<u>^</u> 6	<u>\$</u> 5	0
Particles >71μm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>17/13	A 40/4C	▲ 17/15	16/12
On Olcarillicas		130 4400 (6)	>11/10	<u> </u>	17/15	10/12




OIL ANALYSIS REPORT

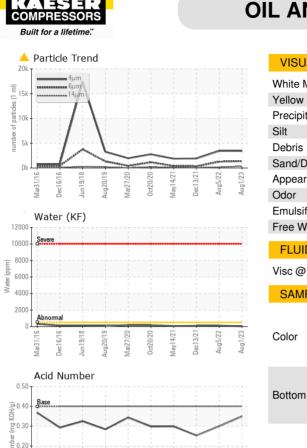

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.4	44.1	44.2
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						

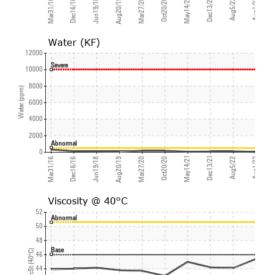

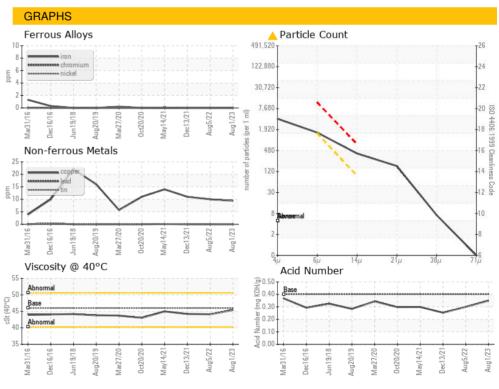



42

0.1 PG

0.00

Laboratory Sample No. Lab Number : 06125671 Unique Number: 10939822

: KCP48050D

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Tested Diagnosed

: 21 Mar 2024 : 25 Mar 2024

: 25 Mar 2024 - Don Baldridge

UNIVERSAL FOREST PRODUCTS 9356 OOLTEWAH RINGGOLD RD OOLTAWAH, TN

US 37363

Contact: SERVICE MANAGER

Test Package: IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: