

# **OIL ANALYSIS REPORT**

Sample Rating Trend



**WATER** 

# KAESER SM 15 3730964 (S/N 1217)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

### **DIAGNOSIS**

### Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

All component wear rates are normal.

### Contamination

There is a light concentration of water present in the oil. There is a moderate amount of visible silt present in the sample.


### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Aug2017	Aug2018	Sep2019 Mar2022	Mar2024	
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013029	KCP34807	KCP23737
Sample Date		Client Info		13 Mar 2024	11 Mar 2022	09 Sep 2019
Machine Age	hrs	Client Info		11516	19884	13753
Oil Age	hrs	Client Info		0	3953	3000
Oil Changed		Client Info		Not Changd	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	7	29	22
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	31	21	11
Calcium	ppm	ASTM D5185m	2	<1	0	<1
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		61	74	143
Sulfur	ppm	ASTM D5185m		20872	14362	17157
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		8	4	2
Potassium	ppm	ASTM D5185m	>20	<1	1	5
Water	%	ASTM D6304	>0.05	<u> </u>	0.012	△ 0.224
ppm Water	ppm	ASTM D6304	>500	<b>1570</b>	120.0	<u>2240</u>
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647				
Particles >6μm		ASTM D7647	>1300			
Particles >14µm		ASTM D7647	>80			
Particles >21µm		ASTM D7647	>20			
Particles >38µm		ASTM D7647	>4			
Particles >71µm		ASTM D7647	>3			
Oil Cleanliness		ISO 4406 (c)	>/17/13			
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2




## **OIL ANALYSIS REPORT**

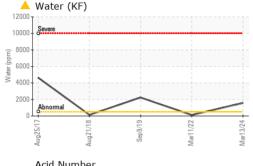





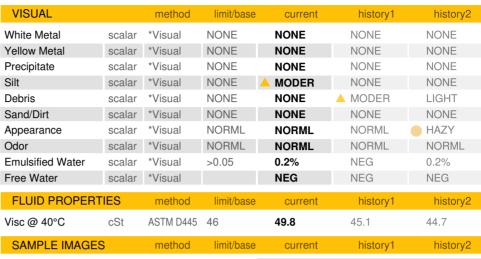



Color







### **GRAPHS**







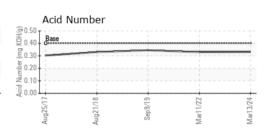





Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA013029 : 06125688

Unique Number: 10939839

Received **Tested** Diagnosed

: 21 Mar 2024 : 26 Mar 2024

: 26 Mar 2024 - Jonathan Hester

**SHORE TIRE** 9300 MARSHALL DR LENEXA, KS US 66215 Contact: Service Manager

Test Package: IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: