




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

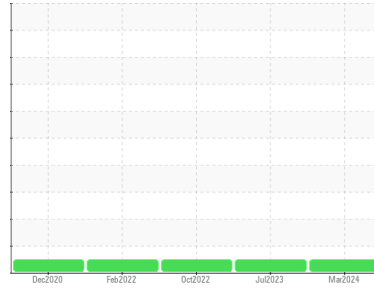

Machine Id

FORD P-25

Component

Diesel Engine

Fluid

10W30 DURON SEMI (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			LP0001341	LP0000031	WC0721135
Sample Date	Client Info			14 Mar 2024	14 Jul 2023	04 Oct 2022
Machine Age	mls	Client Info		167000	156867	146693
Oil Age	mls	Client Info		8000	9500	10300
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	75	74	80
Chromium	ppm	ASTM D5185m	>20	6	4	5
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m	>2	0	1	<1
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	8	10	12
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	2	4	2
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		13	18	11
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		71	82	75
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		1142	1149	1121
Calcium	ppm	ASTM D5185m		1627	1436	1352
Phosphorus	ppm	ASTM D5185m		1322	1256	1176
Zinc	ppm	ASTM D5185m		1578	1515	1478
Sulfur	ppm	ASTM D5185m		3945	3599	3425



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8	6	15
Sodium	ppm	ASTM D5185m		3	0	5
Potassium	ppm	ASTM D5185m	>20	0	2	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.7	1.1	1.4
Nitration	Abs/cm	*ASTM D7624	>20	11.9	14.4	16.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.3	26.2	28.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.5	24.8	26.2
Base Number (BN)	mg KOH/g	ASTM D2896		11.63	10.92	9.05











OIL ANALYSIS REPORT

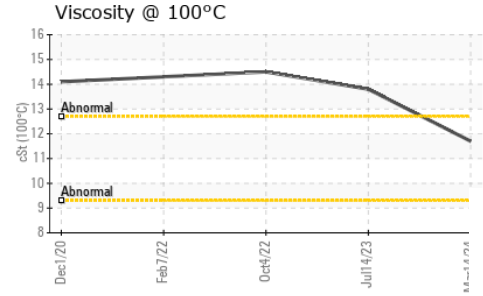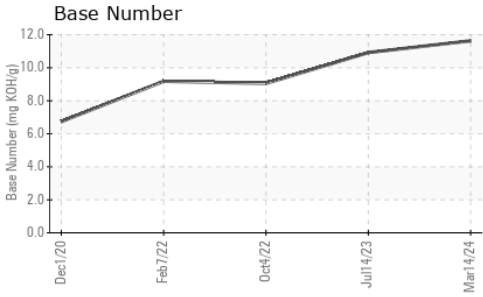

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.7	13.8	14.5

GRAPHS

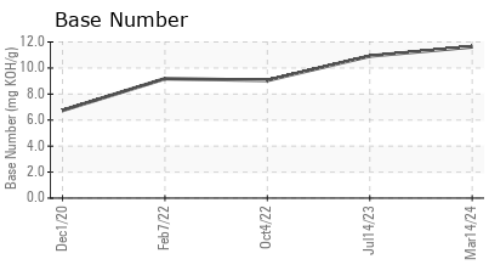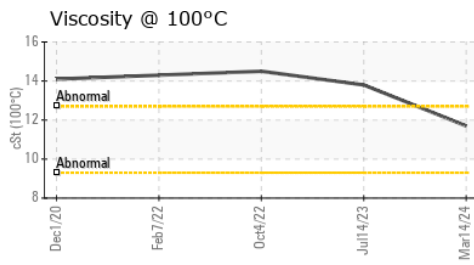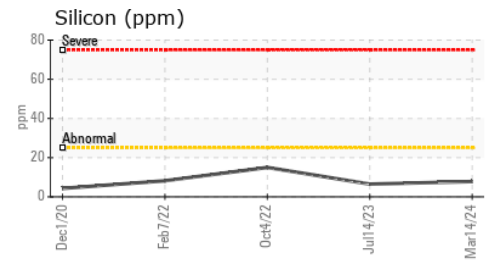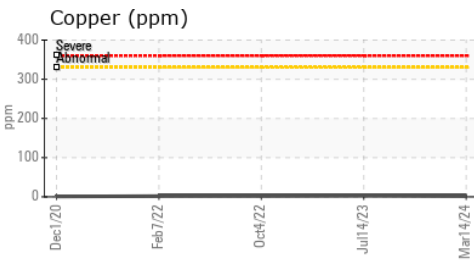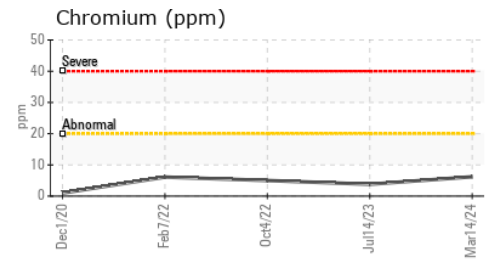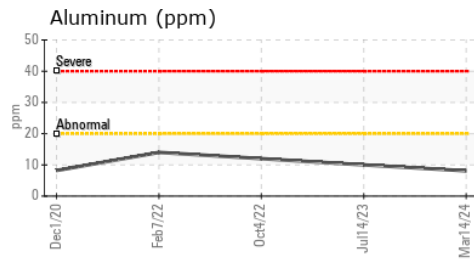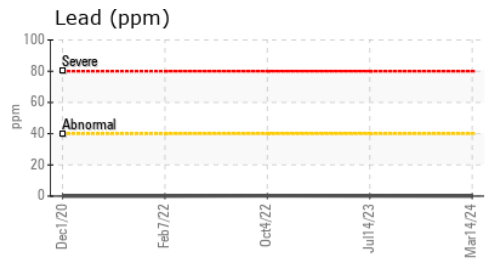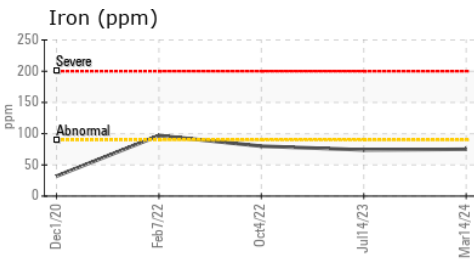

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LP0001341 **Received** : 21 Mar 2024
Lab Number : 06125821 **Tested** : 25 Mar 2024
Unique Number : 10939972 **Diagnosed** : 25 Mar 2024 - Wes Davis
Test Package : MOB 2

SELECT DEMO
 40 LOWELL RD
 SALEM, NH
 US 03079
 Contact: STAN DOGIL
 SDOGIL@SELECTDEMOSERVICES.COM
 T: (603)401-0147
 F: (603)458-7389

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)