

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

KAESER 6243952

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jan2023	Mar2024		
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013264	KCP54107	
Sample Date		Client Info		04 Mar 2024	04 Jan 2023	
Machine Age	hrs	Client Info		17775	9765	
Oil Age	hrs	Client Info		8010	5194	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	8	5	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	90	11	22	
Calcium	ppm	ASTM D5185m	2	0	0	
Phosphorus	ppm	ASTM D5185m		0	7	
Zinc	ppm	ASTM D5185m		3	11	
Sulfur	ppm	ASTM D5185m		20803	19978	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	
Sodium	ppm	ASTM D5185m		7	3	
Potassium	ppm	ASTM D5185m	>20	0	<1	
Water	%	ASTM D6304	>0.05	0.010	0.019	
ppm Water	ppm	ASTM D6304	>500	101	194.8	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		12976	20788	
Particles >6µm		ASTM D7647	>1300	<u> </u>	▲ 8232	
Particles >14µm		ASTM D7647	>80	<u> </u>	4 00	
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	
Particles >38µm		ASTM D7647	>4	1	2	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	▲ 22/20/16	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.34	0.33	
× /	5 5					




OIL ANALYSIS REPORT

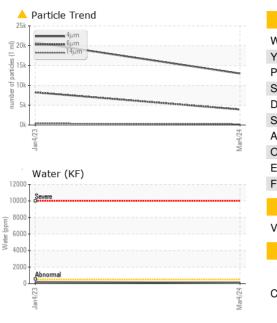

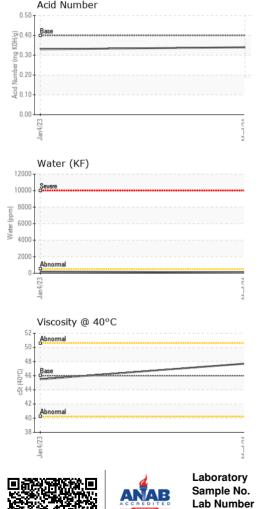

Certificate L2367

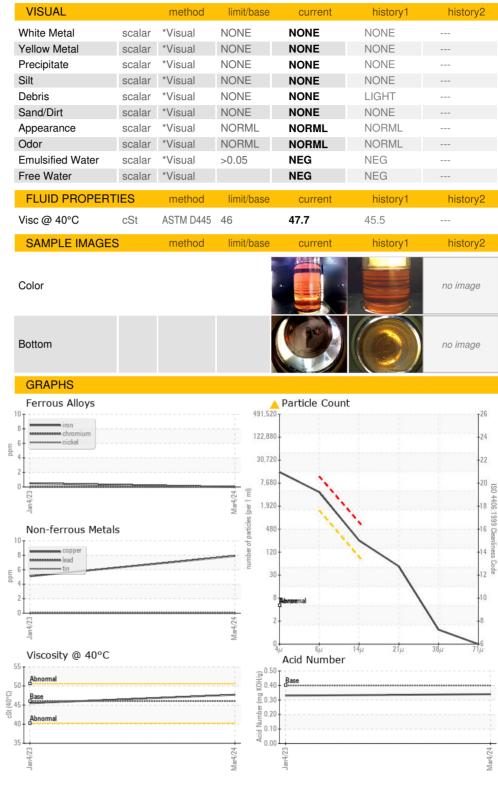

Test Package : IND 2 (Additional Tests: KF, PrtCount)

: KCPA013264

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

:06130611

Unique Number : 10950076

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

Diagnosed

Tested

: 27 Mar 2024

: 28 Mar 2024

: 30 Mar 2024 - Don Baldridge

STANDARD MOTOR PRODUCTS

1801 WATER RIDGE DR

Contact: Service Manager

LEWISVILLE, TX

US 75057

T: F: