

OIL ANALYSIS REPORT

Sample Rating Trend



KAESER 6945125

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jui2020	Aug2021	Jul2022 F	eb2024	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC67088	KC102850	KCP42972
Sample Date		Client Info		21 Feb 2024	27 Jul 2022	13 Aug 2021
Machine Age	hrs	Client Info		6324	3485	1998
Oil Age	hrs	Client Info		2839	1486	1578
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	2
Copper	ppm	ASTM D5185m	>50	4	8	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	17
Barium	ppm	ASTM D5185m	90	0	0	<1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	46	43	68
Calcium	ppm	ASTM D5185m	2	0	0	1
Phosphorus	ppm	ASTM D5185m		0	1	5
Zinc	ppm	ASTM D5185m		0	1	4
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		16	23	18
Potassium	ppm	ASTM D5185m	>20	0	0	7
Water	%	ASTM D6304	>0.05	0.022	0.019	0.035
ppm Water	ppm	ASTM D6304	>500	221	198.1	351.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4007	1940	3708
Particles >6µm		ASTM D7647	>1300	1062	535	1 439
Particles >14µm		ASTM D7647	>80	53	35	48
Particles >21µm		ASTM D7647	>20	10	13	9
Particles >38µm		ASTM D7647	>4	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	18/16/12	18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.28	0.284



OIL ANALYSIS REPORT

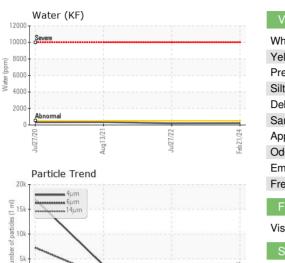




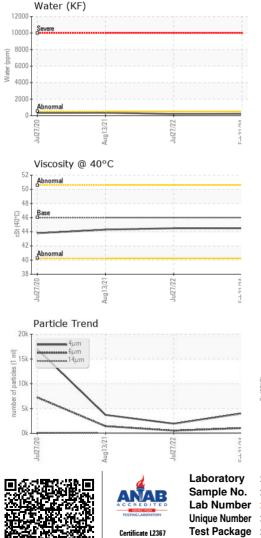

NONE NONE *Visual NONE NONE White Metal scalar Yellow Metal NONE NONE NONE NONE scalar *Visual Precipitate scalar *Visua NONE NONE NONE NONE Silt scalar *Visual NONE NONE NONE NONE NONE Debris *Visual NONE NONE NONE scalar Sand/Dirt NONE scalar *Visual NONE NONE NONE NORML Appearance NORML NORML NORML scalar *Visua Odor *Visual NORML NORML NORML NORML scalar **Emulsified Water** scalar *Visual >0.05 NEG NEG NEG Free Water scalar *Visual NEG NEG NEG FLUID PROPERTIES Visc @ 40°C cSt ASTM D445 46 44.5 44.5 44.3 SAMPLE IMAGES Color

Bottom

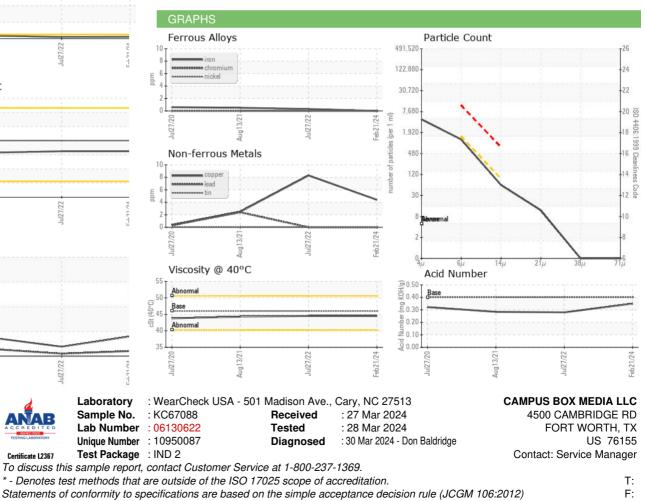

Contact/Location: Service Manager - CAMFORTX