

OIL ANALYSIS REPORT

KAESER SX 6 2814604 (S/N 3190) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

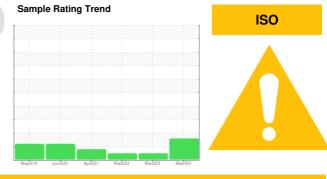

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015837	KCP54544	KCP38419
Sample Date		Client Info		19 Mar 2024	07 Mar 2023	03 Mar 2022
Machine Age	hrs	Client Info		11545	94536	74258
Oil Age	hrs	Client Info		2110	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	4	2	2
Tin	ppm		>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	1010	method	limit/base		-	
			inniv base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	53	74	78
Calcium	ppm	ASTM D5185m	2	0	0	1
Phosphorus	ppm	ASTM D5185m		0	3	5
Zinc	ppm	ASTM D5185m		6	4	12
Sulfur	ppm	ASTM D5185m		20515	20649	17178
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		10	13	12
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Water	%	ASTM D6304	>0.05	0.015	0.016	0.026
ppm Water	ppm	ASTM D6304	>500	153	166.3	261.4
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		34087	1838	3655
Particles >6µm		ASTM D7647	>1300	<u> </u>	391	663
Particles >14µm		ASTM D7647	>80	<u> </u>	26	50
Particles >21µm		ASTM D7647	>20	<u> </u>	7	14
Particles >38µm		ASTM D7647	>4	3	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	18/16/12	17/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma KOU/a		0.4	0.29	0.26	0.20

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.38 0.36 0.38


Report Id: MCMDOY [WUSCAR] 06130650 (Generated: 03/30/2024 13:14:01) Rev: 1


Contact/Location: Service Manager - MCMDOY



OIL ANALYSIS REPORT






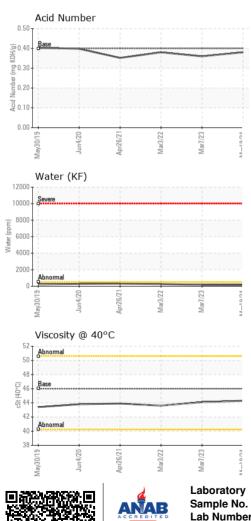

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.3	44.1	43.6
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						

Bottom

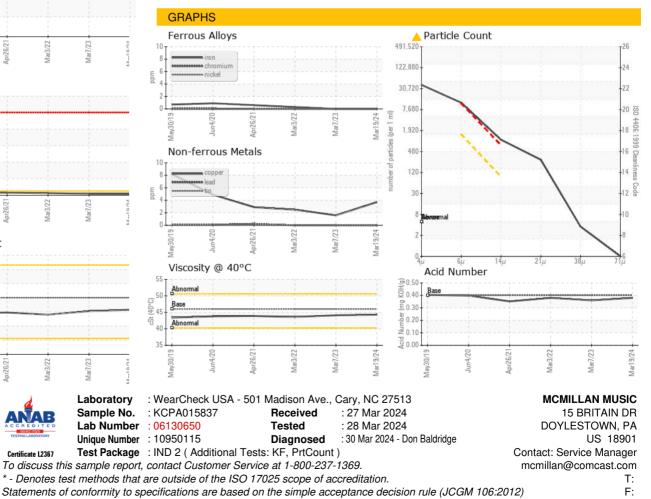

Certificate L2367