




# OIL ANALYSIS REPORT

Sample Rating Trend

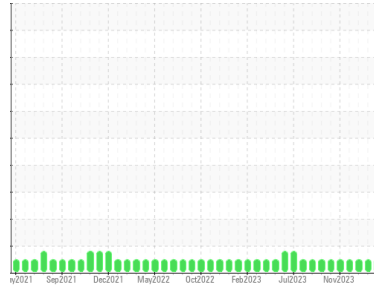

**NORMAL**



Area  
**Martinsville**  
 Machine Id  
**[Martinsville] Oil - Starboard Main Engine**  
 Component  
**Starboard Main Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: George willis )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0805448</b>	WC0735540	WC0735523
Sample Date	Client Info		<b>18 Mar 2024</b>	15 Feb 2024	21 Jan 2024
Machine Age	hrs	Client Info	<b>21036</b>	20454	19913
Oil Age	hrs	Client Info	<b>4726</b>	4114	3602
Oil Changed	Client Info		<b>Not Chngd</b>	Filtered	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>26</b>	17	15
Chromium	ppm	ASTM D5185m >8	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	0	3
Lead	ppm	ASTM D5185m >18	<b>4</b>	1	5
Copper	ppm	ASTM D5185m >80	<b>17</b>	11	16
Tin	ppm	ASTM D5185m >14	<b>1</b>	0	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>58</b>	54	69
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>84</b>	71	77
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	2
Magnesium	ppm	ASTM D5185m 450	<b>1386</b>	1341	1214
Calcium	ppm	ASTM D5185m 3000	<b>1372</b>	1305	1215
Phosphorus	ppm	ASTM D5185m 1150	<b>1047</b>	860	876
Zinc	ppm	ASTM D5185m 1350	<b>1245</b>	1141	1118
Sulfur	ppm	ASTM D5185m 4250	<b>3195</b>	3317	2713

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	3	4
Sodium	ppm	ASTM D5185m >158	<b>3</b>	0	4
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	4
Water	%	ASTM D6304 >0.1	<b>NEG</b>	NEG	NEG

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.4</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.3</b>	10.3	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.5</b>	22.9	22.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.3</b>	20.6	19.6
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.76</b>	10.07	9.08







# OIL ANALYSIS REPORT

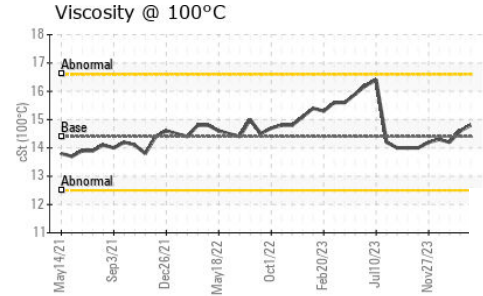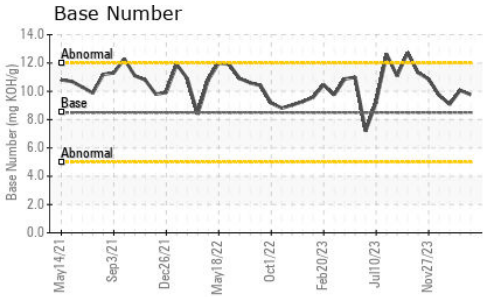

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.8</b>	14.6	14.2

## GRAPHS

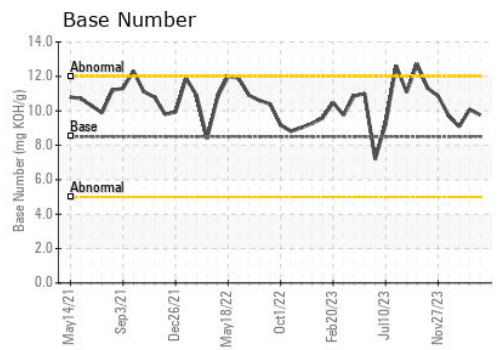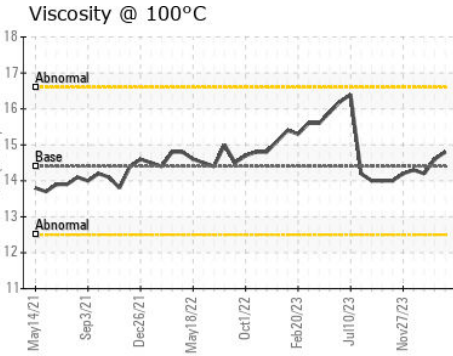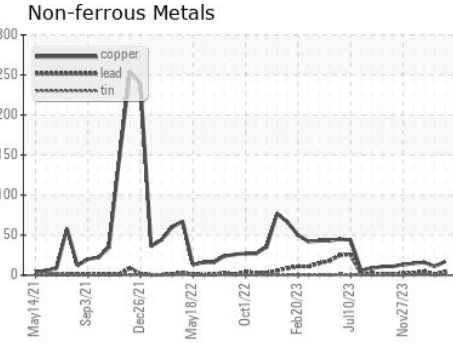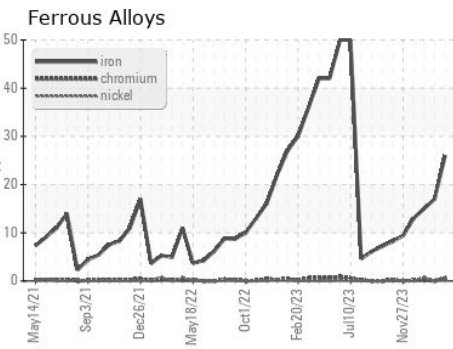

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0805448 **Received** : 27 Mar 2024  
**Lab Number** : **06130831** **Tested** : 01 Apr 2024  
**Unique Number** : 10950296 **Diagnosed** : 01 Apr 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)