




# OIL ANALYSIS REPORT



Area  
**Map Runner**  
 Machine Id  
**[Map Runner] Oil - Port Main Engine**  
 Component  
**Port Main Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (37 GAL)**

Sample Rating Trend

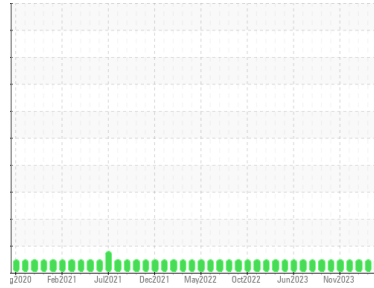

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0859922</b>	WC0845876	WC0845757
Sample Date	Client Info		<b>20 Mar 2024</b>	26 Feb 2024	23 Jan 2024
Machine Age	hrs	Client Info	<b>21955</b>	21425	0
Oil Age	hrs	Client Info	<b>283</b>	642	0
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>5</b>	6	4
Chromium	ppm	ASTM D5185m >8	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	0	2
Lead	ppm	ASTM D5185m >18	<b>&lt;1</b>	0	3
Copper	ppm	ASTM D5185m >80	<b>1</b>	<1	3
Tin	ppm	ASTM D5185m >14	<b>&lt;1</b>	0	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>3</b>	5	13
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>64</b>	59	67
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	2
Magnesium	ppm	ASTM D5185m 450	<b>1472</b>	1459	1420
Calcium	ppm	ASTM D5185m 3000	<b>1188</b>	1153	1108
Phosphorus	ppm	ASTM D5185m 1150	<b>1204</b>	986	1091
Zinc	ppm	ASTM D5185m 1350	<b>1330</b>	1236	1304
Sulfur	ppm	ASTM D5185m 4250	<b>4024</b>	3899	3434

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	2	4
Sodium	ppm	ASTM D5185m >158	<b>&lt;1</b>	<1	4
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	3
Water	%	ASTM D6304 >0.1	<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.4</b>	8.6	7.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.8</b>	20.0	19.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.6</b>	17.3	15.3
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>13.26</b>	12.64	12.39







# OIL ANALYSIS REPORT

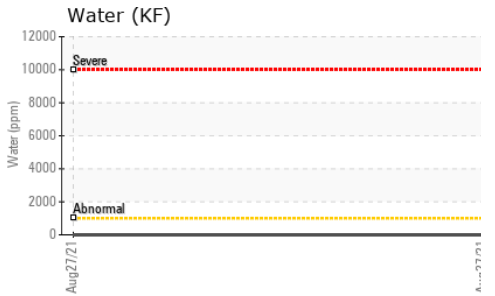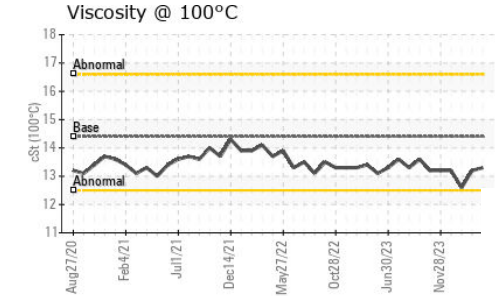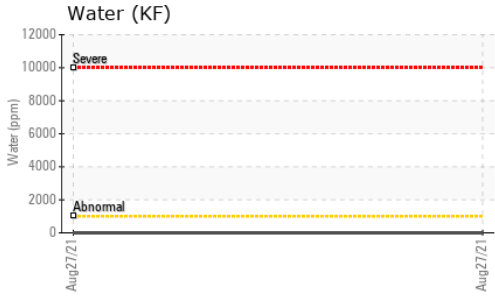

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.3</b>	13.2	12.6

### GRAPHS

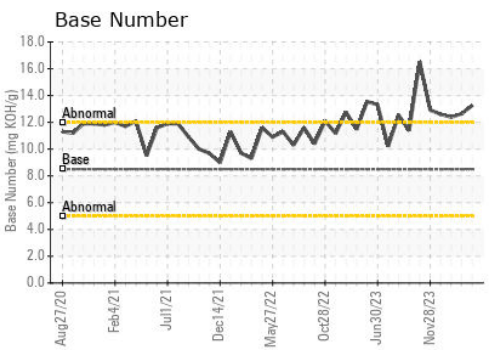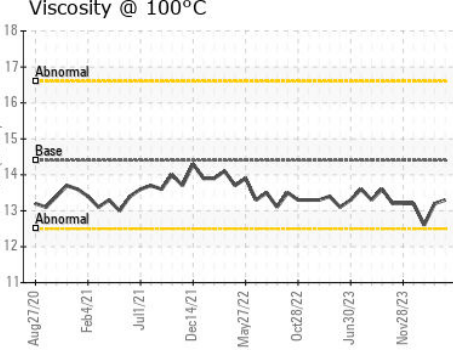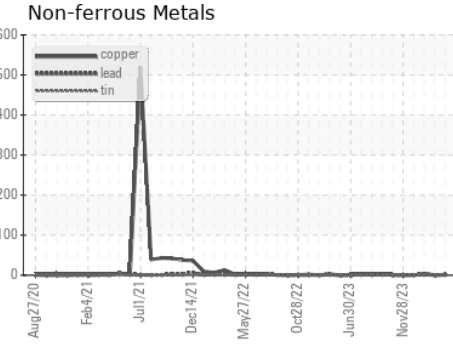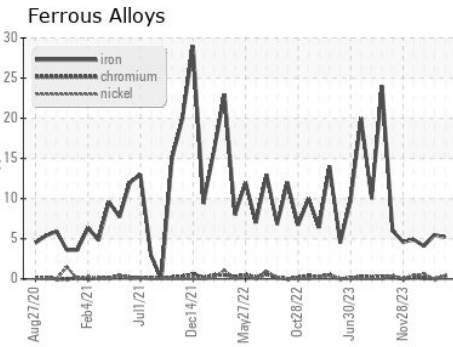

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0859922 **Received** : 27 Mar 2024  
**Lab Number** : **06130835** **Tested** : 01 Apr 2024  
**Unique Number** : 10950300 **Diagnosed** : 01 Apr 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF )

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)