




OIL ANALYSIS REPORT

Sample Rating Trend

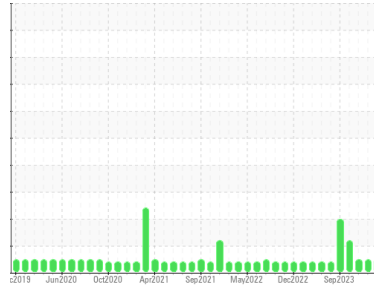

NORMAL



Area
Kentucky
 Machine Id
[Kentucky] Oil - Starboard Genset
 Component
Starboard Genset
 Fluid
DIESEL ENGINE OIL SAE 15W40 (7 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Top Up Amount: 5 GAL. Tyson Bias)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0874820	WC0859933	WC0845746
Sample Date	Client Info			16 Mar 2024	20 Jan 2024	28 Nov 2023
Machine Age	hrs	Client Info		7931	7011	6193
Oil Age	hrs	Client Info		0	385	55
Oil Changed	Client Info			Oil Added	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	0.3	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	3	4	2
Chromium	ppm	ASTM D5185m	>4	<1	<1	0
Nickel	ppm	ASTM D5185m	>2	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	<1	<1	0
Aluminum	ppm	ASTM D5185m	>12	2	2	<1
Lead	ppm	ASTM D5185m	>17	<1	3	<1
Copper	ppm	ASTM D5185m	>70	2	3	2
Tin	ppm	ASTM D5185m	>15	<1	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	11	16	14
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	57	61	53
Manganese	ppm	ASTM D5185m		<1	2	0
Magnesium	ppm	ASTM D5185m	450	1302	1284	1298
Calcium	ppm	ASTM D5185m	3000	1149	1194	1233
Phosphorus	ppm	ASTM D5185m	1150	1046	1049	1056
Zinc	ppm	ASTM D5185m	1350	1210	1278	1273
Sulfur	ppm	ASTM D5185m	4250	3459	3211	2973




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	3	3
Sodium	ppm	ASTM D5185m	>158	3	5	2
Potassium	ppm	ASTM D5185m	>20	2	3	0
Water	%	ASTM D6304	>0.1	NEG	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.4	7.6	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	19.6	19.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	16.1	15.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	13.21	11.78	12.08







OIL ANALYSIS REPORT

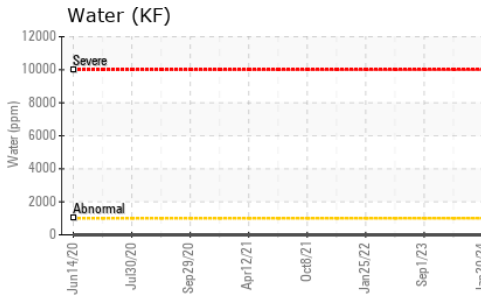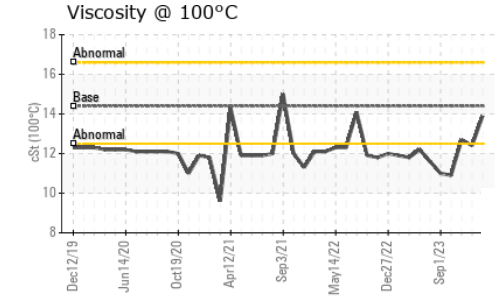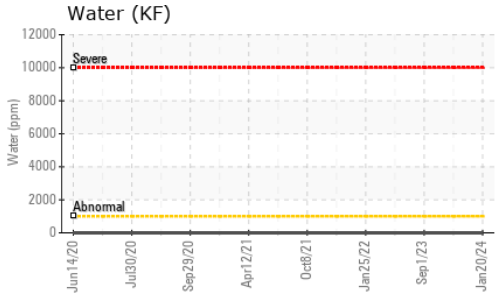

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	MODER	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	12.4	12.7

GRAPHS

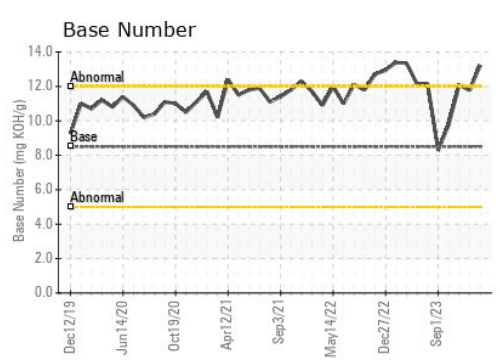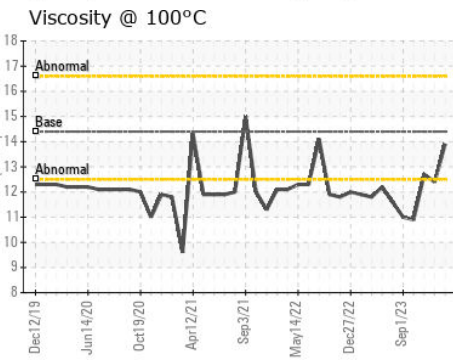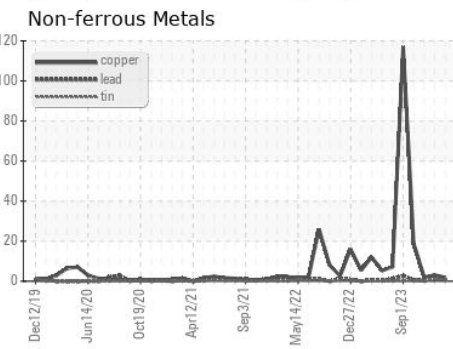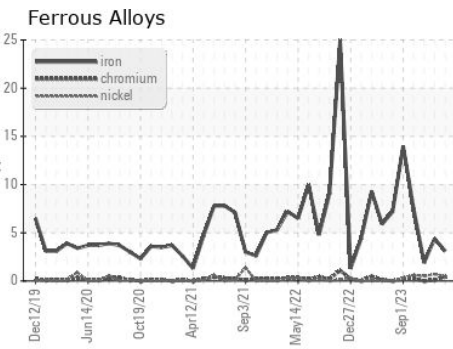

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0874820 **Received** : 27 Mar 2024
Lab Number : **06130856** **Tested** : 01 Apr 2024
Unique Number : 10950321 **Diagnosed** : 01 Apr 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF)

MARATHON PETROLEUM CO.
 101 12TH ST
 CATLETTSBURG, KY
 US 41169
 Contact: CORY GUMBERT
 cagumbert@marathonpetroleum.com
 T: (606)585-3950
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)