



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
S6

Component
Diesel Engine
Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

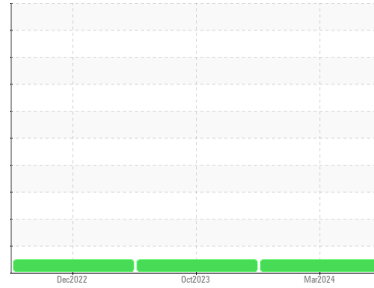

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0841433	WC0841469	WC0758930
Sample Date	Client Info		15 Mar 2024	19 Oct 2023	23 Dec 2022
Machine Age	hrs	Client Info	14915	14914	13848
Oil Age	hrs	Client Info	548	516	363
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	12	10	12
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >5	<1	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	3	2	3
Lead	ppm	ASTM D5185m >40	<1	<1	<1
Copper	ppm	ASTM D5185m >330	<1	<1	1
Tin	ppm	ASTM D5185m >15	2	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	8	9	27
Barium	ppm	ASTM D5185m 10	0	0	1
Molybdenum	ppm	ASTM D5185m 100	70	64	85
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	853	874	71
Calcium	ppm	ASTM D5185m 3000	1160	1323	2006
Phosphorus	ppm	ASTM D5185m 1150	937	1016	897
Zinc	ppm	ASTM D5185m 1350	1170	1350	1091
Sulfur	ppm	ASTM D5185m 4250	3299	3125	2984

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	5	6
Sodium	ppm	ASTM D5185m >158	3	3	6
Potassium	ppm	ASTM D5185m >20	2	2	3
Fuel	%	ASTM D3524 >3.0	1.1	<1.0	<1.0

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.5	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	8.6	8.1	9.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.8	20.5	21.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.0	15.4	16.0
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	6.1	7.0	5.1







OIL ANALYSIS REPORT

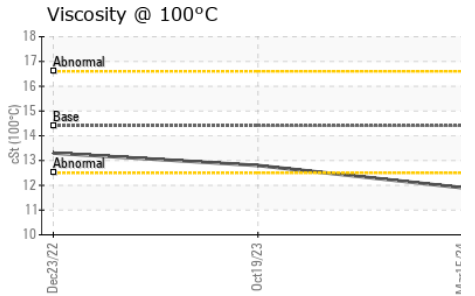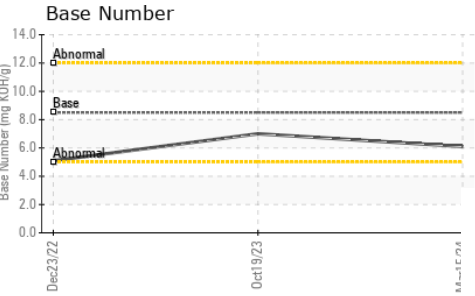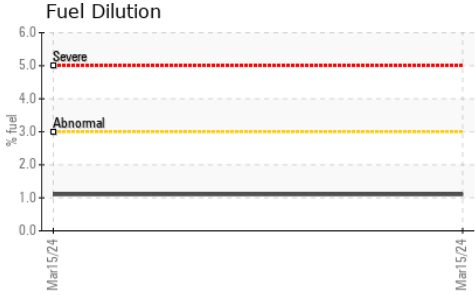

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	11.9	12.8	13.3

GRAPHS

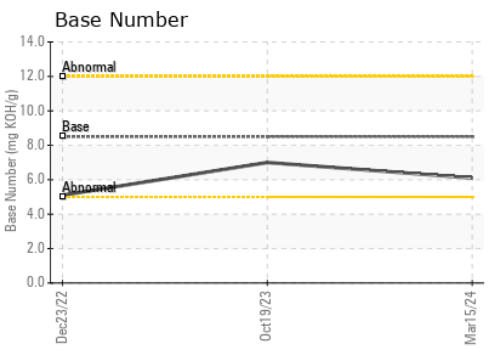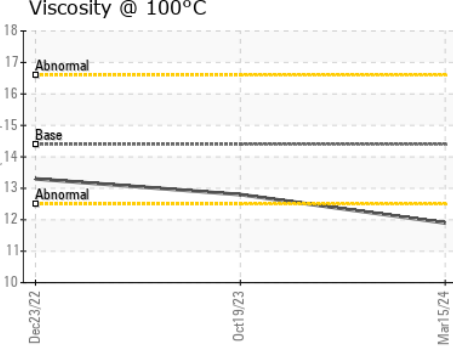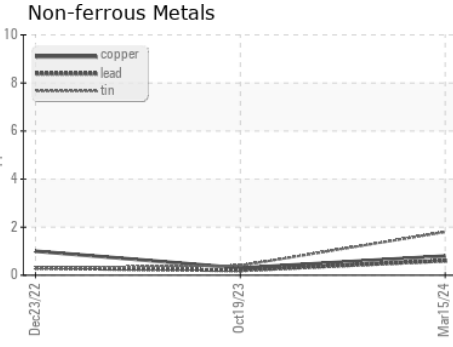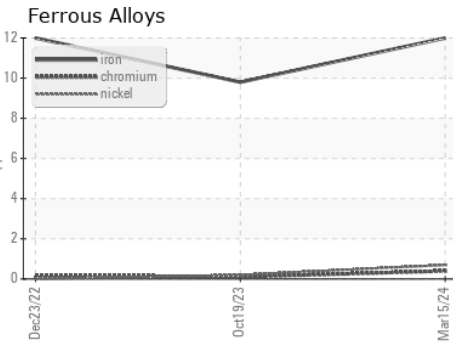

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0841433 **Received** : 27 Mar 2024
Lab Number : **06131307** **Tested** : 02 Apr 2024
Unique Number : 10950772 **Diagnosed** : 02 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

Apple Valley Waste - SEW Location
 309 Salina Road
 Sewell, NJ
 US 08080
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: