




OIL ANALYSIS REPORT

Sample Rating Trend

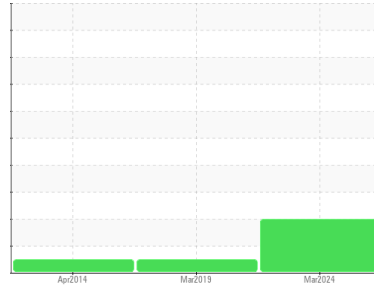

ISO



Area
[IVY CITY]
 Machine Id
ALSTOM 3213

Component
Hydraulic System
 Fluid
ESSO UNIVIS N 32 (55 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0798952 | WCM2294649 | WCM2259871 |
| Sample Date | Client Info | | 23 Mar 2024 | 31 Mar 2019 | 05 Apr 2014 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ABNORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >20 | 3 | 4 | 3 |
| Chromium | ppm | ASTM D5185m >10 | 3 | 4 | 5 |
| Nickel | ppm | ASTM D5185m >10 | 44 | 43 | 15 |
| Titanium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >10 | 2 | <1 | 0 |
| Lead | ppm | ASTM D5185m >10 | 11 | 14 | 12 |
| Copper | ppm | ASTM D5185m >75 | 6 | 9 | 6 |
| Tin | ppm | ASTM D5185m >10 | <1 | <1 | 0 |
| Antimony | ppm | ASTM D5185m | --- | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | <1 | 0 | <1 |
| Cadmium | ppm | ASTM D5185m | <1 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-----------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m .1 | <1 | 0 | <1 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m .3 | <1 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | <1 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m 0 | 3 | 2 | 3 |
| Calcium | ppm | ASTM D5185m 74 | 101 | 65 | 71 |
| Phosphorus | ppm | ASTM D5185m 266 | 347 | 371 | 400 |
| Zinc | ppm | ASTM D5185m 338 | 445 | 469 | 515 |
| Sulfur | ppm | ASTM D5185m | 2503 | 3435 | 3559 |

CONTAMINANTS





| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >20 | 2 | 1 | 2 |
| Sodium | ppm | ASTM D5185m | 0 | 2 | 2 |
| Potassium | ppm | ASTM D5185m >20 | <1 | <1 | 0 |

FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-------------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | ▲ 11581 | 1670 | 919 |
| Particles >6µm | ASTM D7647 | >1300 | ▲ 4024 | 336 | 155 |
| Particles >14µm | ASTM D7647 | >160 | ▲ 503 | 16 | 11 |
| Particles >21µm | ASTM D7647 | >40 | ▲ 168 | 5 | 5 |
| Particles >38µm | ASTM D7647 | >10 | 7 | 0 | 0 |
| Particles >71µm | ASTM D7647 | >3 | 1 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | ▲ 21/19/16 | 18/16/11 | 17/14/11 |



OIL ANALYSIS REPORT

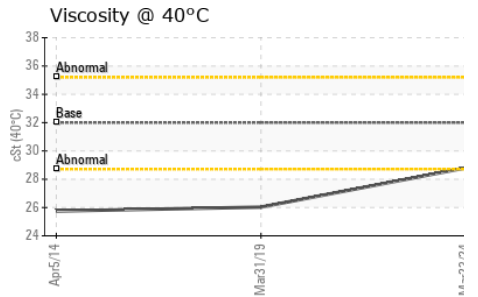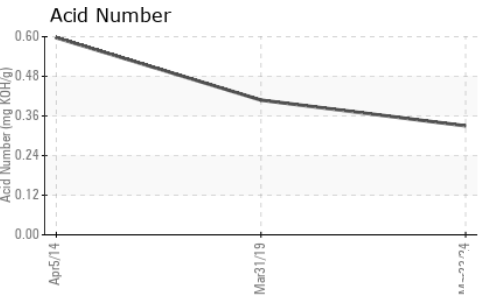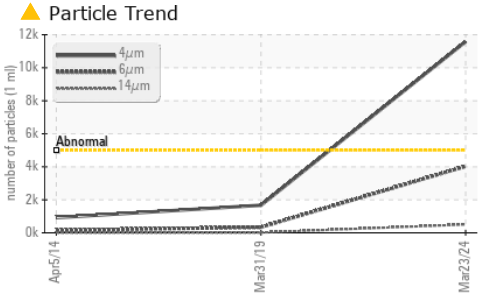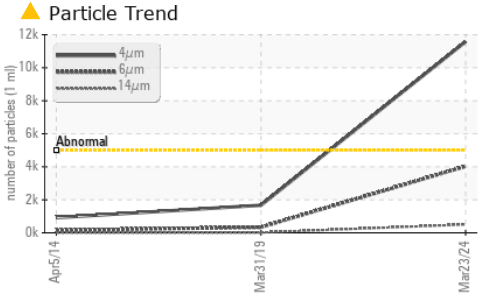


| FLUID DEGRADATION | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.33 | 0.408 | 0.597 |






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|-----------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 32 | 26.03 | 25.75 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

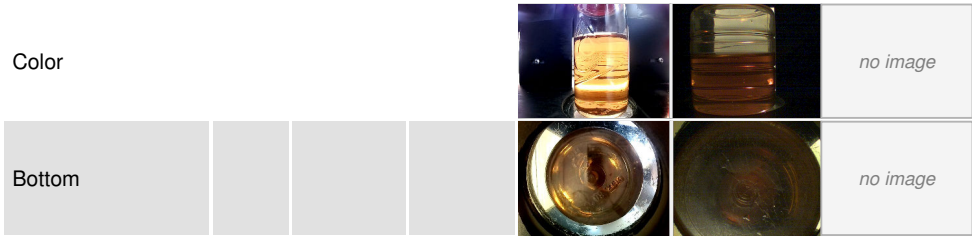

GRAPHS

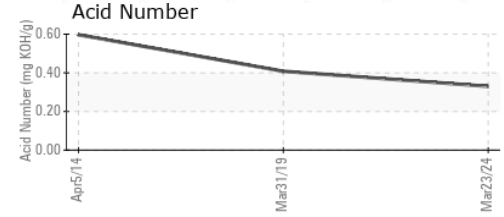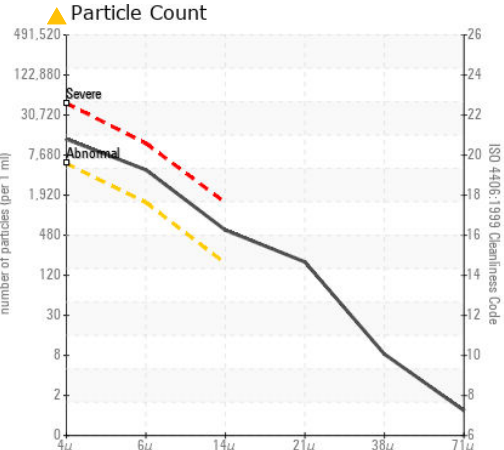

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0798952
Lab Number : **06131358**
Unique Number : 10950823
Test Package : MOB 2
Received : 27 Mar 2024
Tested : 01 Apr 2024
Diagnosed : 01 Apr 2024 - Don Baldrige

AMTRAK
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR
 WASHINGTON, DC
 US 20018
 Contact: MICHAEL PORTER
 michael.porter@amtrak.com
 T: (202)870-1399
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)