


# **OIL ANALYSIS REPORT**

Sample Rating Trend



**NORMAL** 



K-1501B Booster Compressor

**Tank Lube System** 

PHILLIPS 66 Diamond Class® Turbine Oil AW 32 (

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


AW 32 ( GAL)						
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		HLC0003079	HLC0003089	HLC000265
Sample Date		Client Info		22 Mar 2024	03 Jan 2024	12 Oct 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	Ν	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>20	1	0	0
Γitanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	2	2	<1
_ead	ppm	ASTM D5185m	>20	1	<1	<1
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Γin	ppm	ASTM D5185m	>20	<1	<1	0
/anadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		6	4	<1
Phosphorus	ppm	ASTM D5185m		21	18	2
Zinc	ppm	ASTM D5185m		7	0	0
Sulfur	ppm	ASTM D5185m		549	475	452
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	1	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		236	369	4385
Particles >6µm		ASTM D7647	>2500	78	141	685
Particles >14µm		ASTM D7647	>320	12	15	45
Particles >21µm		ASTM D7647	>80	3	5	13
Particles >38µm		ASTM D7647	>20	0	0	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	15/13/11	16/14/11	19/17/13
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.04	0.09	0.07	0.05




## **OIL ANALYSIS REPORT**

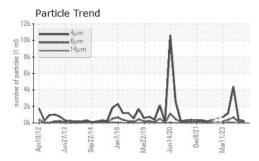








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIFS	method	limit/base	current	history1	history2

I LOID I HOI LIH						
Visc @ 40°C	cSt	ASTM D445	32.7	31.6	31.6	31.4

SAMPLE IMAGES	method		history1	history
Color				



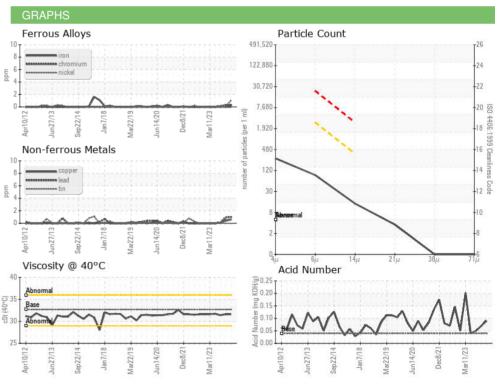





Certificate L2367

Laboratory Sample No.

: HLC0003079

Lab Number : 06131360 Unique Number: 10950825 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 27 Mar 2024 : 28 Mar 2024 **Tested** 

: 01 Apr 2024 - Don Baldridge Diagnosed

**HILCORP ALASKA LLC - ENDICOTT** 

604 WAREHOUSE ENDICOTT PRUDHOE BAY, AK

US 99734 Contact: SEAN LOWTHER

slowther@hilcorp.com T: (907)659-6800

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: