

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

KAESER 7922223 Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		-	0ct2022	Mar2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015122	KCP46820D	
Sample Date		Client Info		19 Mar 2024	17 Oct 2022	
Machine Age	hrs	Client Info		3068	1225	
Oil Age	hrs	Client Info		1843	1225	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	1	
Chromium	ppm	ASTM D5185m	>10	<1	<1	
Nickel	ppm	ASTM D5185m	>3	0	<1	
Titanium	ppm	ASTM D5185m	>3	<1	<1	
Silver	ppm	ASTM D5185m	>2	<1	1	
Aluminum	ppm	ASTM D5185m	>10	2	0	
Lead	ppm	ASTM D5185m	>10	<1	0	
Copper	ppm	ASTM D5185m	>50	2	2	
Tin	ppm	ASTM D5185m	>10	<1	<1	
Vanadium	ppm	ASTM D5185m		<1	<1	
Cadmium	ppm	ASTM D5185m		<1	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m	0	<1	1	
Manganese	ppm	ASTM D5185m		<1	2	
Magnesium	ppm	ASTM D5185m	100	60	64	
Calcium	ppm	ASTM D5185m	0	4	0	
Phosphorus	ppm	ASTM D5185m	0	5	4	
Zinc	ppm	ASTM D5185m	0	5	2	
Sulfur	ppm	ASTM D5185m	23500	21850	21600	
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	2	
Sodium	ppm	ASTM D5185m		13	13	
Potassium	ppm	ASTM D5185m	>20	3	1	
Water	%	ASTM D6304	>0.05	0.019	0.034	
ppm Water	ppm	ASTM D6304	>500	193	349.9	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		15243	4579	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u> </u>	
Particles >14µm		ASTM D7647	>80	<mark>人</mark> 933	A 251	
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	
Particles >38µm		ASTM D7647	>4	<u> </u>	1	
Particles >71µm		ASTM D7647	>3	1	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	1/20/17	▲ 19/18/15	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.37	0.26	




Built for a lifetime.

OIL ANALYSIS REPORT

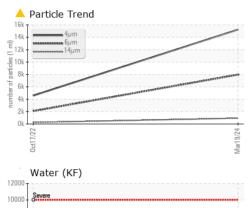




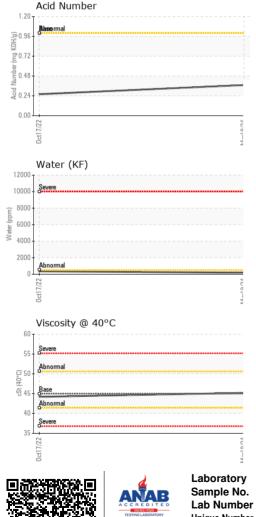

VISUAL		method	limit/base	current	history1	history
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	LIGHT	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPERT	IES	method	limit/base	current	history1	history
/isc @ 40°C	cSt	ASTM D445	45	45.2	44.2	
SAMPLE IMAGES	;	method	limit/base	current	history1	history
Bottom						no image
GRAPHS						
Ferrous Alloys				Particle Cour	nt	
iron			491,520	I		
chromium			122,880	-		
			30,720			
				<u> </u>		
2			7,680			
0ct17/22			Mar19/24 s (per 1 ml			
_			Ma cles (p	N. 19		
Non-ferrous Metals	5		+5/61/ml 1,920 +6/61/ml 120			
copper					1	-
- tin			E 30			
			1			
				Biorene mal		
0ct11//22			Mar19/24	·		

(B/H0) MOX 0.96 Sev 55 Abn () 50-Ê 0.72 cSt 45 - e 0.48 40 Acid Nu 0.24 Se 35 0.00 Mar19/24 -0ct17/22 0ct17/22 : WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA015122 Received : 27 Mar 2024 Lab Number : 06131413 Tested : 28 Mar 2024 Unique Number : 10950878 Diagnosed : 01 Apr 2024 - Don Baldridge Test Package : IND 2 (Additional Tests: KF, PrtCount) Contact: Service Manager Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)



T: F:

Mar19/24

Contact/Location: Service Manager - AUDROC