


OIL ANALYSIS REPORT

Sample Rating Trend



VIS DEBRIS



5481185 (S/N 1808)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Nov2022	Mar2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015610	KCP46472	
Sample Date		Client Info		06 Mar 2024	21 Nov 2022	
Machine Age	hrs	Client Info		40372	34768	
Oil Age	hrs	Client Info		0	8302	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	<1	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	<1	0	
Aluminum	ppm	ASTM D5185m	>10	2	<1	
Lead	ppm	ASTM D5185m	>10	<1	0	
Copper	ppm	ASTM D5185m	>50	30	12	
Tin	ppm	ASTM D5185m	>10	<1	<1	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m		<1	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	90	12	6	
Calcium	ppm	ASTM D5185m	2	3	0	
Phosphorus	ppm	ASTM D5185m		12	21	
Zinc	ppm	ASTM D5185m		43	23	
Sulfur	ppm	ASTM D5185m		17566	21773	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	6	
Sodium	ppm	ASTM D5185m		4	2	
Potassium	ppm	ASTM D5185m	>20	2	0	
Water	%	ASTM D6304	>0.05	0.010	0.006	
ppm Water	ppm	ASTM D6304	>500	106	69.2	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			7851	
Particles >6µm		ASTM D7647	>1300		<u>^</u> 2061	
Particles >14µm		ASTM D7647	>80		<u>173</u>	
Particles >21µm		ASTM D7647	>20		<u></u> 41	
Particles >38µm		ASTM D7647	>4		4	
Particles >71µm		ASTM D7647	>3		0	
Oil Cleanliness		ISO 4406 (c)	>/17/13		<u>^</u> 20/18/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma K∩U/a	VCTM D004E	0.4	0.37	0.37	

Acid Number (AN)


mg KOH/g ASTM D8045 0.4

0.37

0.37



OIL ANALYSIS REPORT

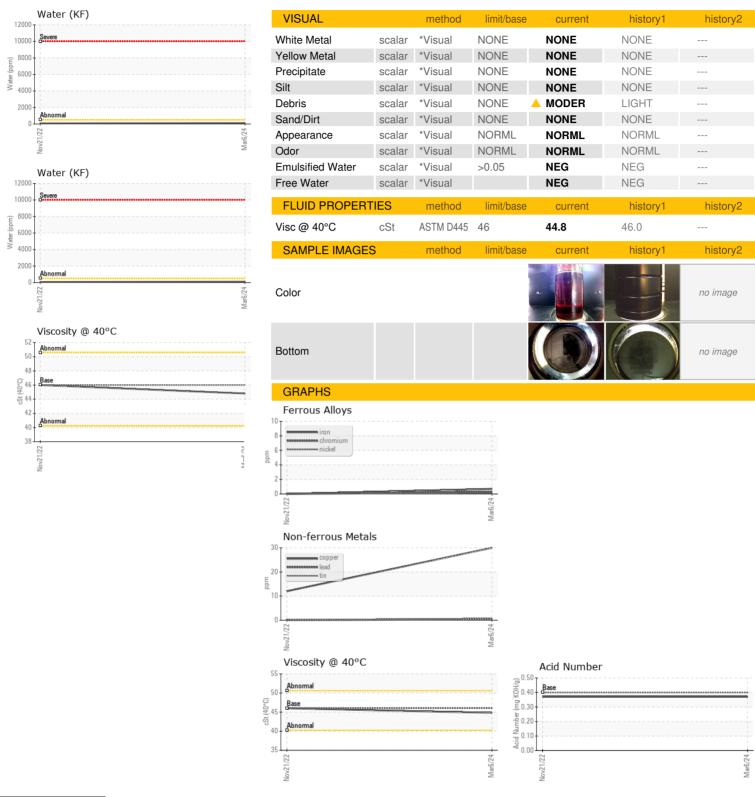





Laboratory Sample No.

Lab Number : 06131415

Unique Number : 10950880 Test Package: IND 2 (Additional Tests: KF, PrtCount)

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA015610 Received : 27 Mar 2024 : 01 Apr 2024

Tested Diagnosed

: 01 Apr 2024 - Don Baldridge

CAPITAL CORRUGATED

8333 24TH AVE SACRAMENTO, CA US 95826

Contact: ZAID DAGHDONNI zaid.daghdonni@goldenwestpackaging.com

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: