


OIL ANALYSIS REPORT

Sample Rating Trend



VIS DEBRIS

A

Machine Id

KAESER AS 30 1152162 (S/N 1003)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Aug2017 Dec2018 Jul2019 Mar2020 Oet2020 Nev2021 Jun2022 Mar2023 Mar2024									
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		KCPA015741	KCPA000334	KCP51291			
Sample Date		Client Info		14 Mar 2024	13 Mar 2023	22 Jun 2022			
Machine Age	hrs	Client Info		68223	65562	63628			
Oil Age	hrs	Client Info		1154	0	1600			
Oil Changed		Client Info		Not Changd	N/A	Not Changd			
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL			
WEAR METALS		method	limit/base	current	history1	history2			
Iron	ppm	ASTM D5185m	>50	2	<1	<1			
Chromium	ppm	ASTM D5185m	>10	<1	0	0			
Nickel	ppm	ASTM D5185m	>3	<1	<1	0			
Titanium	ppm	ASTM D5185m	>3	<1	0	0			
Silver	ppm	ASTM D5185m	>2	<1	0	0			
Aluminum	ppm	ASTM D5185m	>10	2	<1	<1			
Lead	ppm	ASTM D5185m	>10	<1	0	<1			
Copper	ppm	ASTM D5185m	>50	6	3	<1			
Tin	ppm	ASTM D5185m	>10	<1	<1	0			
Antimony	ppm	ASTM D5185m							
Vanadium	ppm	ASTM D5185m		<1	0	0			
Cadmium	ppm	ASTM D5185m		<1	0	0			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m	0	0	0	<1			
Barium	ppm	ASTM D5185m	90	7	0	22			
Molybdenum	ppm	ASTM D5185m	0	<1	0	0			
Manganese	ppm	ASTM D5185m		<1	<1	0			
Magnesium	ppm	ASTM D5185m	100	54	49	97			
Calcium	ppm	ASTM D5185m	0	5	1	2			
Phosphorus	ppm	ASTM D5185m	0	<1	4	2			
Zinc	ppm	ASTM D5185m	0	16	8	8			
Sulfur	ppm	ASTM D5185m	23500	19271	20345	20026			
CONTAMINANTS		method	limit/base	current	history1	history2			
o									
Silicon	ppm	ASTM D5185m	>25	<1	<1	0			
	ppm ppm	ASTM D5185m ASTM D5185m	>25	<1 20	<1 12	0 17			
Sodium Potassium	ppm	ASTM D5185m	>20	20	12	17			
Sodium Potassium Water	ppm ppm	ASTM D5185m ASTM D5185m	>20	20 4	12 2	17 4			
Sodium Potassium Water	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304	>20 >0.05	20 4 0.018	12 2 \$\triangle 0.255\$	17 4 0.038			
Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>20 >0.05 >500	20 4 0.018 190	12 2 ▲ 0.255 ▲ 2550	17 4 0.038 387.2			
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>20 >0.05 >500 limit/base	20 4 0.018 190 current	12 2 ▲ 0.255 ▲ 2550 history1	17 4 0.038 387.2 history2			
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>20 >0.05 >500 limit/base	20 4 0.018 190 current	12 2 ▲ 0.255 ▲ 2550 history1	17 4 0.038 387.2 history2 12901			
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm % ppm	ASTM D5185m ASTM D6185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base	20 4 0.018 190 current	12 2 ▲ 0.255 ▲ 2550 history1	17 4 0.038 387.2 history2 12901 ▲ 2461			
Water ppm Water	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	20 4 0.018 190 current 	12 2 ▲ 0.255 ▲ 2550 history1	17 4 0.038 387.2 history2 12901 ▲ 2461 ▲ 241			
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20	20 4 0.018 190 current	12 2 ▲ 0.255 ▲ 2550 history1	17 4 0.038 387.2 history2 12901 ▲ 2461 ▲ 241 ▲ 67			
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	20 4 0.018 190 current 	12 2 ▲ 0.255 ▲ 2550 history1	17 4 0.038 387.2 history2 12901 △ 2461 △ 241 △ 67 △ 6			


0.40


0.46




OIL ANALYSIS REPORT

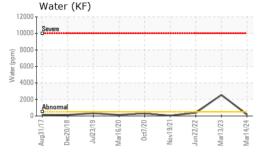





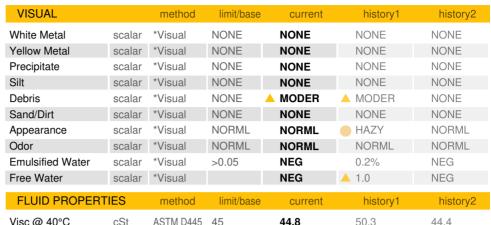


100 @ 10 0	001	7.01111.0110			00.0	
SAMPLE IMAGES		method	limit/base	current	history1	history2


Color







GRAPHS







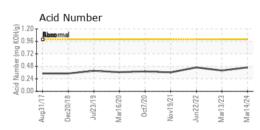



Laboratory Sample No. Lab Number : 06131427 **Unique Number** : 10950892

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA015741

Received **Tested**

: 27 Mar 2024 Diagnosed

: 01 Apr 2024

: 01 Apr 2024 - Don Baldridge

PMP CORP 25 SECURITY DR AVON, CT US 06001

Test Package: IND 2 (Additional Tests: KF, PrtCount) Contact: C. ROBILLARD crobillard@pmp-corp.com To discuss this sample report, contact Customer Service at 1-800-237-1369. T:

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: PMPAVO [WUSCAR] 06131427 (Generated: 04/01/2024 20:22:08) Rev: 1

Contact/Location: C. ROBILLARD - PMPAVO

F: