




OIL ANALYSIS REPORT

Sample Rating Trend

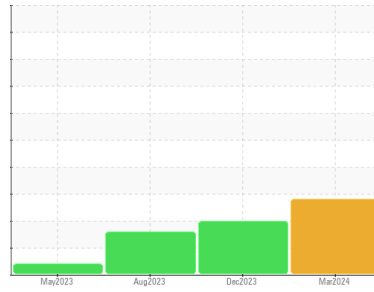

VISCOSITY



Area

ROLL SHOP

Machine Id

28N Farrel Spindle lube 8100-002-0002

Component

Hydraulic System

Fluid

PETRO CANADA HYDREX AW 32 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KFS0004788	KFS0005231	KFS0003622
Sample Date	Client Info			26 Mar 2024	19 Dec 2023	30 Aug 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	2	5
Chromium	ppm	ASTM D5185m	>20	0	<1	0
Nickel	ppm	ASTM D5185m	>20	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	3	3
Lead	ppm	ASTM D5185m	>20	0	0	4
Copper	ppm	ASTM D5185m	>20	<1	0	▲ 66
Tin	ppm	ASTM D5185m	>20	<1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	7
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	0	<1	<1	4
Calcium	ppm	ASTM D5185m	50	35	18	96
Phosphorus	ppm	ASTM D5185m	330	181	170	214
Zinc	ppm	ASTM D5185m	430	307	172	212
Sulfur	ppm	ASTM D5185m	760	1364	504	1695


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Sodium	ppm	ASTM D5185m		2	16	3
Potassium	ppm	ASTM D5185m	>20	<1	2	2

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	▲ 15646	▲ 8987	---
Particles >6µm		ASTM D7647	>160	▲ 4488	▲ 2680	---
Particles >14µm		ASTM D7647	>20	▲ 342	▲ 224	---
Particles >21µm		ASTM D7647	>4	▲ 96	▲ 57	---
Particles >38µm		ASTM D7647	>3	▲ 6	3	---
Particles >71µm		ASTM D7647	>3	1	1	---
Oil Cleanliness		ISO 4406 (c)	>16/14/11	▲ 21/19/16	▲ 20/19/15	---


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.50	0.41	0.36	0.34

OIL ANALYSIS REPORT


▲ Particle Trend

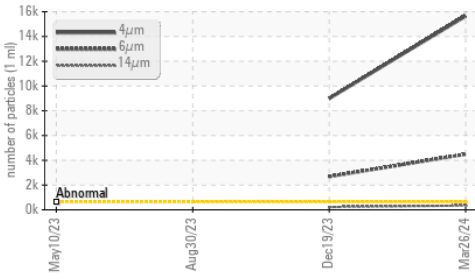


▲ Viscosity @ 40°C

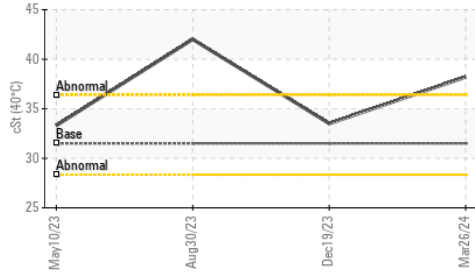

▲ Particle Trend

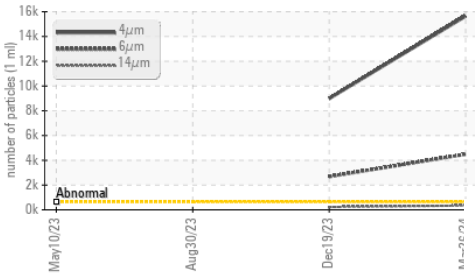

Acid Number

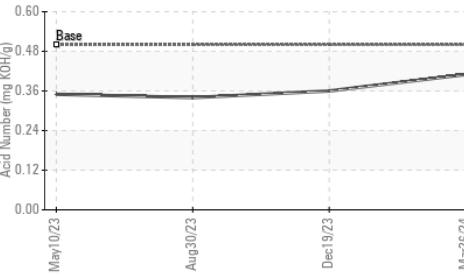

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.5 ▲ 38.2	33.5	42.0 ●

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color




Bottom




GRAPHS


Ferrous Alloys

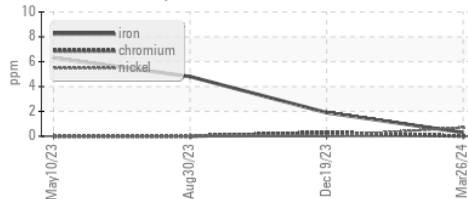


Non-ferrous Metals

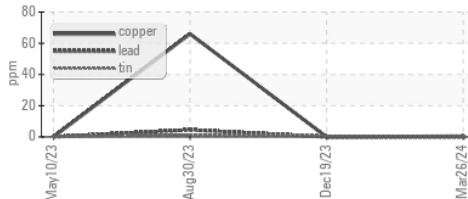


▲ Viscosity @ 40°C

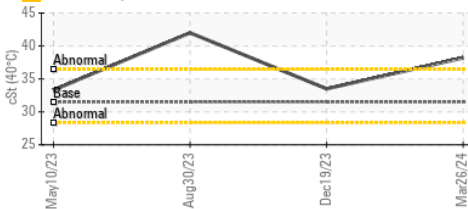

▲ Particle Count

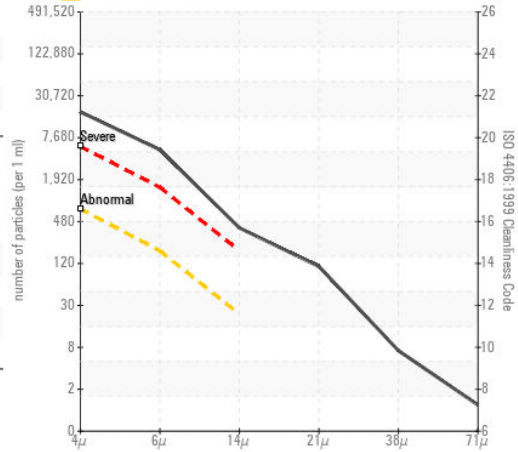

Acid Number

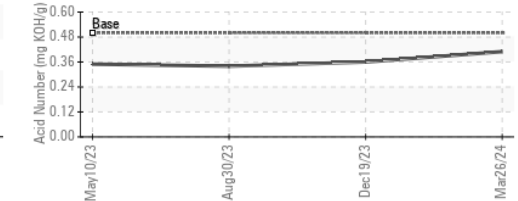

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : KFS0004788

Lab Number : 06131975

Unique Number : 10951440

Test Package : IND 2

Received : 28 Mar 2024

Tested : 04 Apr 2024

Diagnosed : 04 Apr 2024 - Jonathan Hester

CONSTELLIUM

4805 SECOND STREET

MUSCLE SHOALS, AL

US 35661

Contact: Randy Nichols

randall.nichols@constellium.com

T: (256)386-6956

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)