


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



TCCEAM1022

Component

Hydraulic System

ANDEROL ROYCO 500 (30 GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target cleanliness. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. Counts X100.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Mar2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0862385		
Sample Date		Client Info		27 Mar 2024		
Machine Age	mls	Client Info		0		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		982		
Zinc	ppm	ASTM D5185m		4		
Sulfur	ppm	ASTM D5185m		0		
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	19200		
Particles >6µm		ASTM D7647	>1300	6600		
Particles >14μm		ASTM D7647	>160	1100		
Particles >21µm		ASTM D7647	>40	300		
Particles >38μm		ASTM D7647	>10	0		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/11		
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.23		



OIL ANALYSIS REPORT

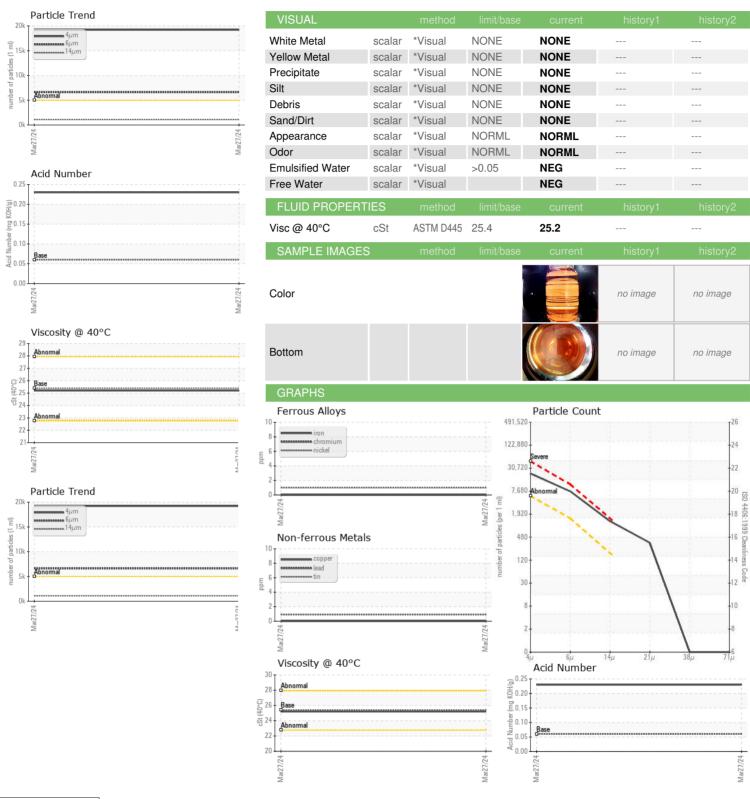





Certificate L2367

Laboratory

Sample No.

Lab Number : 06131977 Unique Number : 10951442 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0862385

Received **Tested** Diagnosed

: 29 Mar 2024 : 29 Mar 2024 - Doug Bogart

: 28 Mar 2024

EATON AEROSPACE LLC 15 DURANT AVE BETHEL, CT

US 06801 Contact: REINALDO CASTILLA

reinaldocastilla@eaton.com T: (203)240-2520

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)