


OIL ANALYSIS REPORT

Area **DS-206** B25011 - DS CENTRAL PARKER HYDRAULIC POWER UNIT (S/N 51-5260A) Component

Hydraulic System

PETRO CANADA PURITY FG AW HYDRAULIC 46 (220 GAL)

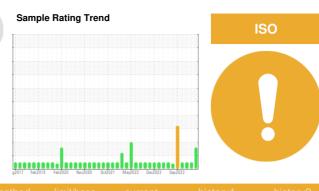


DIAGNOSIS	SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		WC0908036	WC0885405	WC0866779
o corrective action is recommended at this time.	Sample Date		Client Info		28 Mar 2024	03 Feb 2024	29 Nov 2023
esample at the next service interval to monitor.	Machine Age	mths	Client Info		0	0	0
ear	Oil Age	mths	Client Info		0	0	0
l component wear rates are normal.	Oil Changed		Client Info		N/A	N/A	N/A
Contamination	Sample Status				ATTENTION	NORMAL	NORMAL
here is a moderate amount of particulates present the oil.	CONTAMINATIC	N	method	limit/base		history1	history2
uid Condition	Water		WC Method	>0.05 NEG		NEG	NEG
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.	WEAR METALS		method	limit/base	current	history1	history2
	Iron	ppm	ASTM D5185m	>30	0	0	0
	Chromium	ppm	ASTM D5185m	>2	0	0	0
	Nickel	ppm	ASTM D5185m	>2	1	0	0
	Titanium	ppm	ASTM D5185m		0	0	0
	Silver	ppm	ASTM D5185m		0	0	0
	Aluminum	ppm	ASTM D5185m	>2	<1	0	0
	Lead	ppm	ASTM D5185m		0	0	0
	Copper	ppm	ASTM D5185m		1	0	1
	Tin	ppm	ASTM D5185m		، <1	<1	0
	Vanadium		ASTM D5185m	>20	0	0	0
	Cadmium	ppm ppm	ASTM D5185m		0	0	0
	ADDITIVES	ppm		limit/booo		-	
			method	limit/base		history1	history2
	Boron	ppm	ASTM D5185m		0	0	0
	Barium	ppm	ASTM D5185m		0	0	0
	Molybdenum	ppm	ASTM D5185m		0	0	0
	Manganese	ppm	ASTM D5185m		<1	0	<1
	Magnesium	ppm	ASTM D5185m		<1	0	0
	Calcium	ppm	ASTM D5185m		<1	0	<1
	Phosphorus	ppm	ASTM D5185m		378	431	395
	Zinc	ppm	ASTM D5185m		2	0	0
	Sulfur	ppm	ASTM D5185m		549	496	451
	CONTAMINANTS	S	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>25	3	3	2
	Sodium	ppm	ASTM D5185m		<1	0	2
	Potassium	ppm	ASTM D5185m	>20	2	<1	0
	FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
	Particles >4µm		ASTM D7647	>10000	3386	844	629
	Particles >6µm		ASTM D7647	>1300	<mark> </mark> 1369	322	217
	Particles >14µm		ASTM D7647	>160	185	36	39
	Particles >21µm		ASTM D7647	>40	4 1	7	13
	Particles >38µm		ASTM D7647		1	0	1
	Particles >71µm		ASTM D7647		0	0	0
	Oil Cleanliness		ISO 4406 (c)			17/16/12	16/15/12
	FLUID DEGRAD	ATION_	method	limit/base	current	history1	history2
	Acid Number (AN)	mg KOH/g			0.23	0.25	0.22
		ing tori/g	. 10 1 11 00040	0.20	0.20	0.20	0.22


Report Id: HORAUS [WUSCAR] 06131982 (Generated: 04/02/2024 14:50:27) Rev: 1

Contact/Location: RYAN LOWE - HORAUS



OIL ANALYSIS REPORT

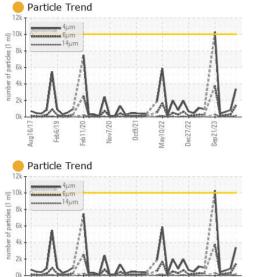


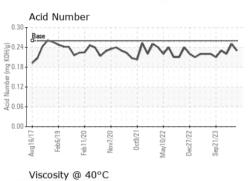


Feb11/20

Aug16/ h6/

ñ



			11 1. 0			
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.36	46.5	46.6	50.8
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color				•	10023844 DS mp 1/2878	•
Bottom						

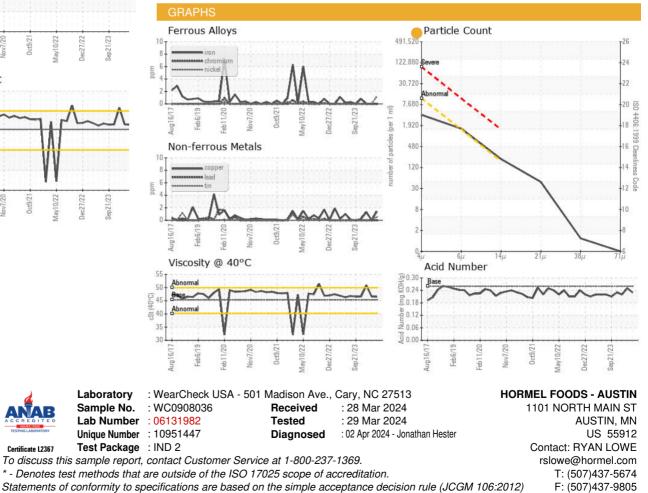

Contact/Location: RYAN LOWE - HORAUS