

### **OIL ANALYSIS REPORT**

# KAESER SK 20 5746000 (S/N 1752)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

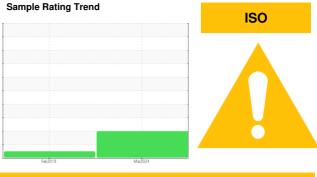

SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016229	KCP13764	
Sample Date		Client Info		19 Mar 2024	06 Feb 2019	
Machine Age	hrs	Client Info		17102	5180	
Oil Age	hrs	Client Info		1582	2399	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	2	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	<1	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	1	0	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>50	5	6	
Tin	ppm	ASTM D5185m	>10	<1	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	
Barium	ppm	ASTM D5185m	90	41	5	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m	U	<1	<1	
Magnesium	ppm	ASTM D5185m	100	63	60	
Calcium	ppm		0	2	<1	
Phosphorus	ppm	ASTM D5185m	0	0	<1	
Zinc	ppm	ASTM D5185m	0	16	16	
Sulfur	ppm	ASTM D5185m	23500	22993	24263	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m	220	9	16	
Potassium	ppm	ASTM D5185m	>20	25	2	
Water	%	ASTM D3103III	>0.05	0.015	0.010	
ppm Water	ppm	ASTM D0304 ASTM D6304	>500	158	100	
FLUID CLEANLIN						history
	1200	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	1000	38575	1802	
Particles >6µm		ASTM D7647		▲ 16180	498	
Particles >14µm		ASTM D7647	>80	▲ 1757	38	
Particles >21µm		ASTM D7647		<b>▲</b> 473	10	
Particles >38µm		ASTM D7647	>4	▲ 19 ·	0	
Particles >71µm		ASTM D7647		1	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>	16/12	

FLUID DEGRADATION Acid Number (AN) mg KOH

mg KOH/g ASTM D8045 1.0

method

limit/base

current

0.41 0.396 ---Contact/Location: Service Manager - ADDDEN


history1

history2





Built for a lifetime

## **OIL ANALYSIS REPORT**

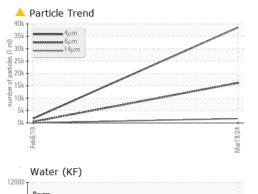



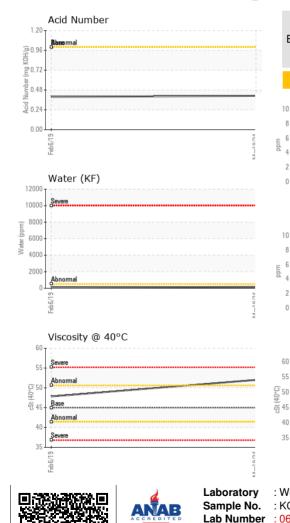

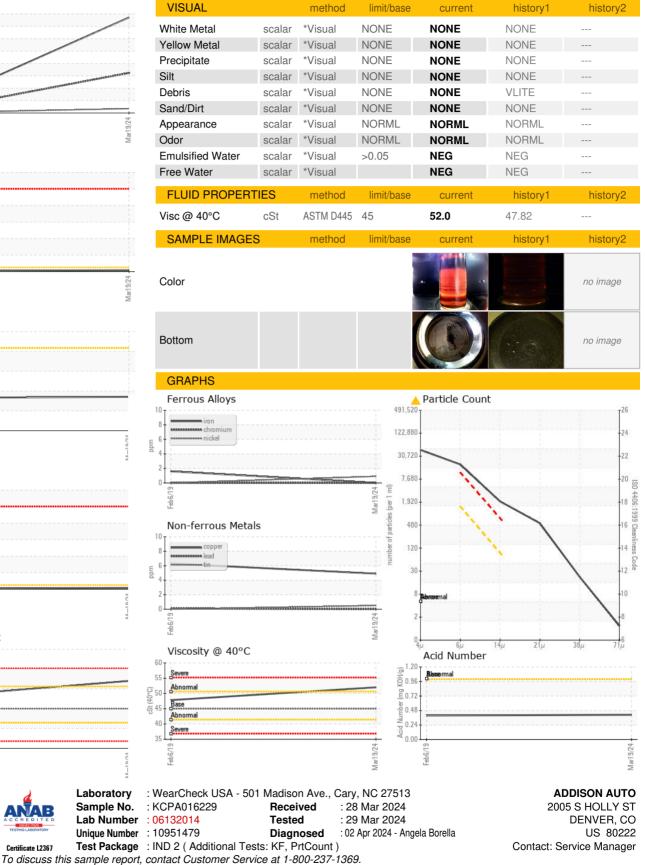

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - ADDDEN

T:

F: