

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



KAESER SM 15T 4447456 (S/N 1132)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Apr2018	Apr2019 Jul2021	Jan 2022 Mar 2023	Mar2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013001	KCP54750	KCP40895
Sample Date		Client Info		13 Mar 2024	09 Mar 2023	26 Jan 2022
Machine Age	hrs	Client Info		14425	11148	7813
Oil Age	hrs	Client Info		2051	5000	1175
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	2	2	2
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	27	39	24
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	47	64	67
Calcium	ppm	ASTM D5185m	0	1	2	0
Phosphorus	ppm	ASTM D5185m	0	0	2	11
Zinc	ppm	ASTM D5185m	0	8	16	0
Sulfur	ppm	ASTM D5185m	23500	23083	23242	15952
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		16	23	16
Potassium	ppm	ASTM D5185m	>20	3	3	0
Water	%	ASTM D6304	>0.05	0.012	0.004	0.011
ppm Water	ppm	ASTM D6304	>500	130	40.1	112.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		3615	32018	6960
Particles >6µm		ASTM D7647	>1300	892	△ 9027	1986
Particles >14µm		ASTM D7647	>80	71	<u>^</u> 206	<u>^</u> 265
Particles >21µm		ASTM D7647	>20	19	<u>4</u> 24	△ 79
Particles >38μm		ASTM D7647	>4	0	3	5
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	<u>22/20/15</u>	▲ 18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

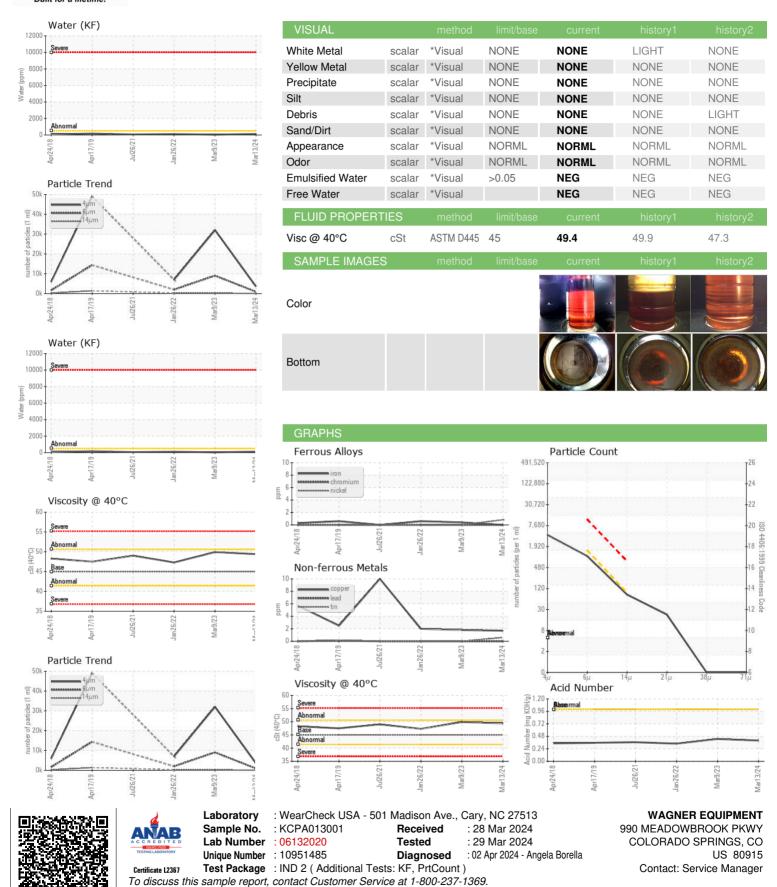

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: