

# **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL

## HS-3 (S/N 26711-001-1-01-12) Component

**Refrigeration Compressor** USPI ALT-68 SC (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0008317		
Sample Date		Client Info		24 Mar 2024		
Machine Age	hrs	Client Info		739		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0		
Chromium	ppm	ASTM D5185m	>2	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>3	0		
Lead	ppm	ASTM D5185m	>2	0		
Copper	ppm	ASTM D5185m	>8	0		
Tin	ppm	ASTM D5185m	>4	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		0		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m	50	0		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.01	0.001		
ppm Water	ppm	ASTM D6304	>100	11		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	735		
Particles >6µm		ASTM D7647	>2500	235		
Particles >14µm		ASTM D7647	>320	20		
Particles >21µm		ASTM D7647	>80	6		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.028		



# **OIL ANALYSIS REPORT**

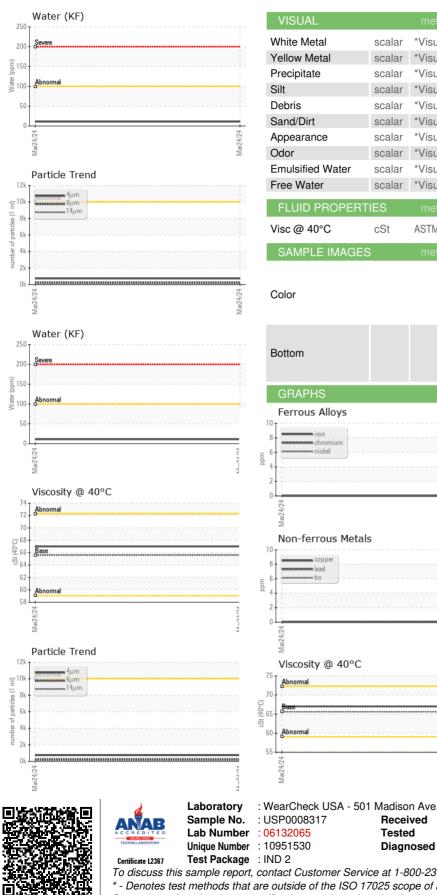

\*Visual NONE \*Visual NONE NONE scalar scalar \*Visua NONE NONE scalar \*Visual NONE NONE \*Visual NONE NONE scalar NONE NONE scalar \*Visual NORML \*Visual NORML scalar \*Visual NORML NORML scalar scalar \*Visual >0.01 NEG scalar \*Visual NEG ASTM D445 65.6 67.0 no image no image no image no image Particle Count 491,52 122,88 30 72 7.68 (per 1 ml) Mar24/24 4406 1,920 :1999 Cle 480 120 14 31 Mar24/24 14 21µ Acid Number (B) mg KOH/ lumb 0.0 Base Acid 0.00 Mar24/24 -Mar24 **TYSON FOODS - RINGGOLD VA** : WearCheck USA - 501 Madison Ave., Cary, NC 27513 1725 CANE CREEK PKWY Received : 28 Mar 2024 RINGGOLD, VA Tested : 29 Mar 2024 : 29 Mar 2024 - Doug Bogart US 24586

NONE

----

Contact: Service Manager To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Page 2 of 2