

OIL ANALYSIS REPORT

Sample Rating Trend



LS-4 (S/N 26711-001-1-01-04)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			0ct2023	Mar2024		
SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0008308	USP0004522	
Sample Date		Client Info		24 Mar 2024	17 Oct 2023	
Machine Age	hrs	Client Info		1115	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	nom	ASTM D5185m	>8	0	0	
Chromium	ppm	ASTM D5185m	>2	0	0	
	ppm		>2	-		
Nickel	ppm	ASTM D5185m		0	0	
Titanium	ppm	ASTM D5185m	-	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>3	0	0	
Lead	ppm	ASTM D5185m	>2	0	0	
Copper	ppm	ASTM D5185m	>8	0	<1	
Tin	ppm	ASTM D5185m	>4	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m		0	<1	
Calcium	ppm	ASTM D5185m		0	1	
Phosphorus	ppm	ASTM D5185m		0	<1	
Zinc	ppm	ASTM D5185m		0	0	
Sulfur	ppm	ASTM D5185m	50	0	0	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	
Sodium	ppm	ASTM D5185m		<1	1	
Potassium	ppm	ASTM D5185m	>20	0	0	
Water	%	ASTM D6304	>0.01	0.001	0.001	
ppm Water	ppm	ASTM D6304	>100	11	15	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	384	1113	
Particles >6µm		ASTM D7647	>2500	111	276	
Particles >14µm		ASTM D7647	>320	11	49	
Particles >21µm		ASTM D7647	>80	4	12	
Particles >38µm		ASTM D7647	>20	1	3	
Particles >71µm		ASTM D7647	>4	0	1	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/14/11	17/15/13	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.028	0.014	



OIL ANALYSIS REPORT



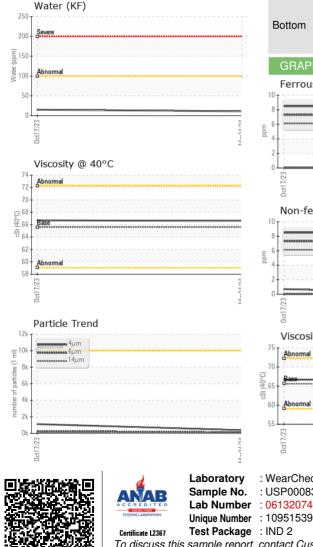

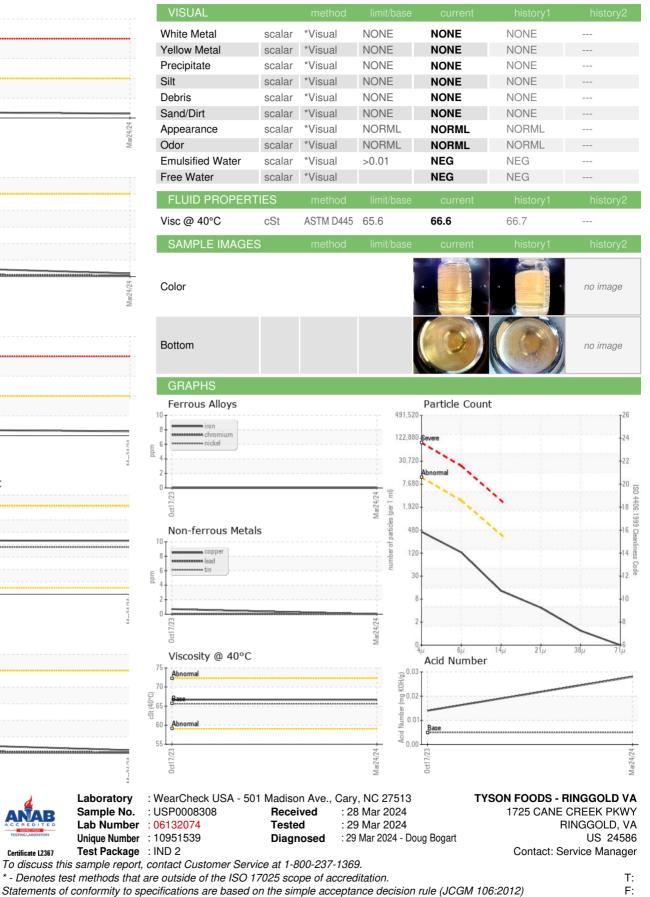

Report Id: TYSRIN [WUSCAR] 06132074 (Generated: 03/29/2024 22:51:35) Rev: 1

Contact/Location: Service Manager - TYSRIN