




# OIL ANALYSIS REPORT

Sample Rating Trend

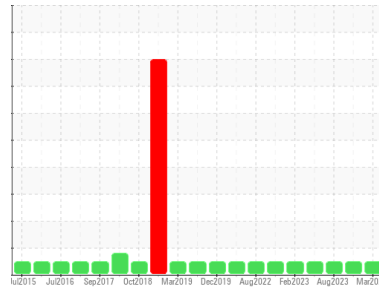

**NORMAL**



Machine Id  
**DRUM 003 (S/N CA0134264)**

Component  
**Gearbox**  
Fluid  
**7EP (1 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0037348</b>	RP0036685	RP0027865
Sample Date	Client Info		<b>13 Mar 2024</b>	21 Dec 2023	02 Aug 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>88</b>	127	114
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	2
Copper	ppm	ASTM D5185m	>200	<b>0</b>	0	4
Tin	ppm	ASTM D5185m	>25	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>22</b>	13	15
Barium	ppm	ASTM D5185m		<b>5</b>	15	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	2
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185m		<b>4</b>	22	0
Phosphorus	ppm	ASTM D5185m		<b>235</b>	211	240
Zinc	ppm	ASTM D5185m		<b>0</b>	6	0

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	<b>&lt;1</b>	2	3
Sodium	ppm	ASTM D5185m		<b>1</b>	<1	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	4
Water	%	ASTM D6304	>0.2	<b>0.006</b>	0.008	0.074
ppm Water	ppm	ASTM D6304	>2000	<b>70</b>	89	741.2




## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.55</b>	0.68	0.61

## VISUAL


	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT


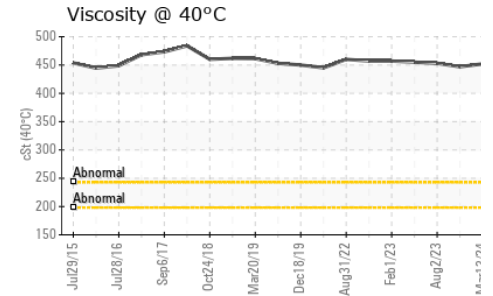
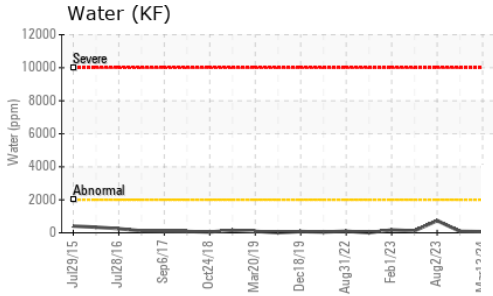
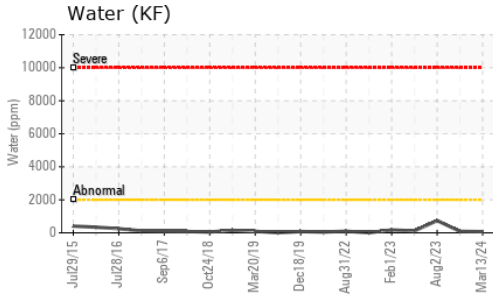


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		452	447	453

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

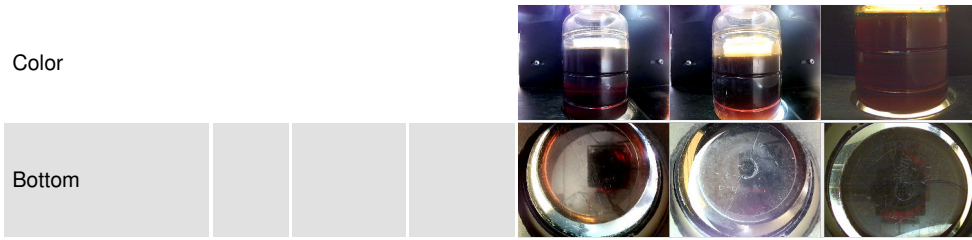

## GRAPHS

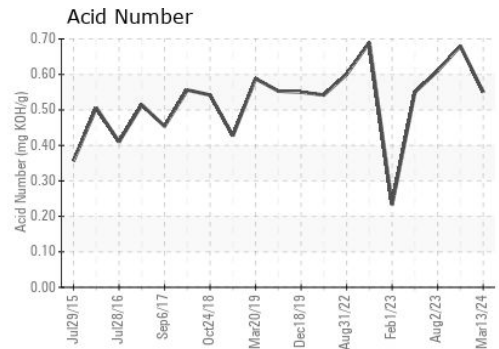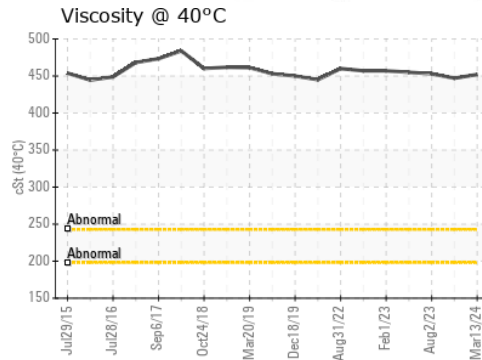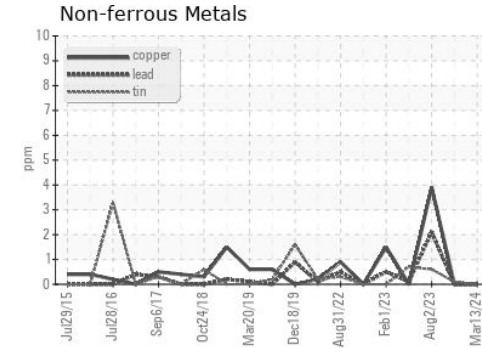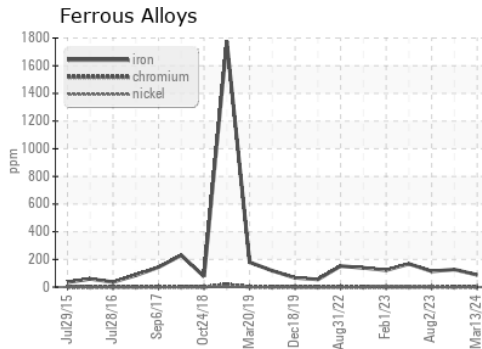

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0037348  
**Lab Number** : 06132103  
**Unique Number** : 10951568  
**Test Package** : IND 2  
**Received** : 28 Mar 2024  
**Tested** : 29 Mar 2024  
**Diagnosed** : 29 Mar 2024 - Wes Davis

**HOLLINGSWORTH & VOSE CO**  
 1115 SE CRYSTAL LAKE DR  
 CORVALLIS, OR  
 US 97333  
 Contact: Jon Ayers  
 jonathan.ayers@hovo.com  
 T: (541)738-5399  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)