


OIL ANALYSIS REPORT

Area ACI 46 KAESER DELTA 1 - NEW MILLENIUM

Compressor





Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Jan-2019 Jul2020 Sep-2020 Dec-2020 Mar2021 Nov-2021 Feb-2022 Mary2022 Sep-2022 Mar2024								
SAMPLE INFORM	MOITAN	method	limit/base	current	history1	history2		
Sample Number		Client Info		UAC06132187	UCH05644966	UCH05557519		
Sample Date		Client Info		15 Mar 2024	12 Sep 2022	26 May 2022		
Machine Age	hrs	Client Info		41232	0	40153		
Oil Age	hrs	Client Info		189	0	1173		
Oil Changed		Client Info		Changed	Not Changd	Not Changd		
Sample Status				NORMAL	NORMAL	NORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2		
Water		WC Method	>0.05	NEG	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	<1	<1		
Chromium	ppm	ASTM D5185m	>10	0	<1	0		
Nickel	ppm	ASTM D5185m	>3	0	0	0		
Titanium	ppm	ASTM D5185m	>3	0	0	0		
Silver	ppm	ASTM D5185m	>2	0	0	0		
Aluminum	ppm	ASTM D5185m	>10	0	1	<1		
Lead	ppm	ASTM D5185m	>10	0	0	<1		
Copper	ppm	ASTM D5185m	>50	<1	<1	<1		
Tin	ppm	ASTM D5185m	>10	0	<1	<1		
Antimony	ppm	ASTM D5185m						
Vanadium	ppm	ASTM D5185m		0	<1	0		
Cadmium	ppm	ASTM D5185m		0	<1	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	1.5	0	0	0		
Barium	ppm	ASTM D5185m	0	0	0	6		
Molybdenum	ppm	ASTM D5185m	0	0	0	0		
Manganese	ppm	ASTM D5185m	0.3	0	<1	0		
Magnesium	ppm	ASTM D5185m	0	0	0	<1		
Calcium	ppm	ASTM D5185m	0	0	0	0		
Phosphorus	ppm	ASTM D5185m	406	205	188	207		
Zinc	ppm	ASTM D5185m	0	0	0	0		
Sulfur	ppm	ASTM D5185m	1283	1445	846	950		
CONTAMINANTS	;	method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	0	<1	<1		
Sodium	ppm	ASTM D5185m		2	0	0		
Potassium	ppm	ASTM D5185m	>20	0	<1	<1		
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2		
	1/011/	4.0T1.1.D00.15	0.400	0.40	0.40	0.11		

0.12

Acid Number (AN)


mg KOH/g ASTM D8045 0.463

0.16


0.11



OIL ANALYSIS REPORT

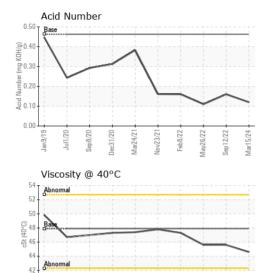

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	47.9	44.6	45.6	45.6
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						

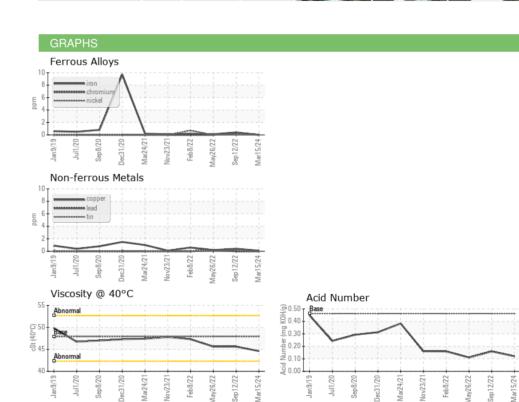





Certificate L2367

Laboratory Sample No.

Test Package : IND 2

: UAC06132187 Lab Number : 06132187 Unique Number : 10951652

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

Diagnosed

: 28 Mar 2024 : 29 Mar 2024

: 02 Apr 2024 - Jonathan Hester

ATLANTIC COMPRESSORS

2144 SALEM INDUSTRIAL DRIVE

SALEM, VA US 24153

Contact: BILL RIMER

bill@atlanticcompressors.com

T: (540)728-1147 F: (757)216-0134

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)