

OIL ANALYSIS REPORT



ZENLUBE 68 - OZEN AIR TECH

Component
New (Unused) Oil


Recommendation

This is a baseline read-out on the submitted sample.

| | | | | Mar2024 | | |
|------------------|----------|-------------|------------|-------------|-------------|-------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | UCH06132587 | | |
| Sample Date | | Client Info | | 26 Mar 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >5 | 0 | | |
| Chromium | ppm | ASTM D5185m | >5 | <1 | | |
| Nickel | ppm | ASTM D5185m | >5 | <1 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | >5 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >5 | <1 | | |
| Lead | ppm | ASTM D5185m | >5 | 0 | | |
| Copper | ppm | ASTM D5185m | >5 | 0 | | |
| Tin | ppm | ASTM D5185m | >5 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 0 | | |
| Calcium | ppm | ASTM D5185m | | 0 | | |
| Phosphorus | ppm | ASTM D5185m | | 389 | | |
| Zinc | ppm | ASTM D5185m | | 0 | | |
| Sulfur | ppm | ASTM D5185m | | 59 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 0 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| Water | % | ASTM D6304 | | NEG | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.321 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | | NEG | | |
| Free Water | scalar | *Visual | | NEG | HAN-RICKNER | - ULTRACHEM |
| | | | | | | |



OIL ANALYSIS REPORT

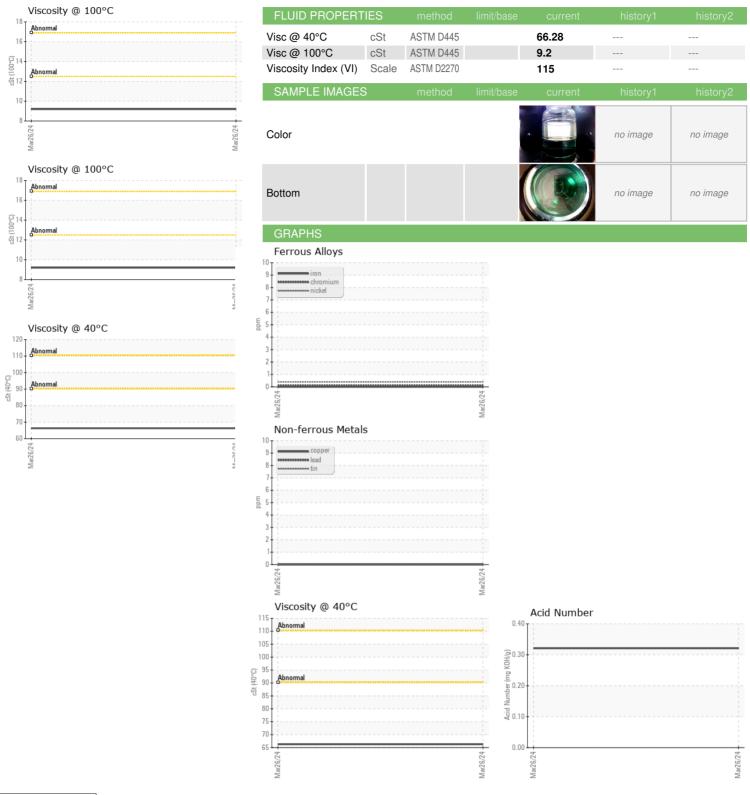





Laboratory Sample No. Unique Number : 10952052

: UCH06132587 Lab Number : 06132587

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Tested Diagnosed

: 28 Mar 2024

: 02 Apr 2024 : 02 Apr 2024 - Jonathan Hester

ULTRACHEM INC 900 CENTERPOINT BLVD

NEW CASTLE, DE US 19720

Test Package : IND 2 (Additional Tests: FT-IR, ICP-NewOil, KF, KV100, PrtCount, VI Contact: JONATHAN RICKNER To discuss this sample report, contact Customer Service at 1-800-237-1369.

jrickner@ultracheminc.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (302)521-7343 F: x:

Report Id: ULTRACHEM [WUSCAR] 06132587 (Generated: 04/02/2024 19:18:22) Rev: 1

Contact/Location: JONATHAN RICKNER - ULTRACHEM