




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

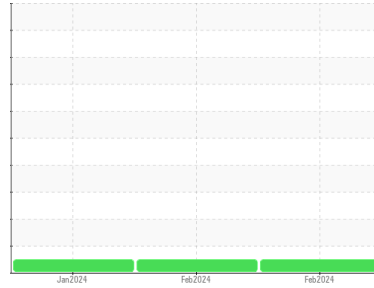

Area
Pillen Family Farms
 Machine Id
MILTK38

Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0006839	SBP0005323	SBP0006176
Sample Date	Client Info		26 Feb 2024	05 Feb 2024	12 Jan 2024
Machine Age	hrs	Client Info	350	350	350
Oil Age	hrs	Client Info	0	0	350
Oil Changed	Client Info		Not Changed	Not Changd	Not Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	5	9	10
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	2	2
Lead	ppm	ASTM D5185m >40	0	<1	2
Copper	ppm	ASTM D5185m >330	<1	<1	<1
Tin	ppm	ASTM D5185m >15	0	<1	1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	1	1	0
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	56	66	61
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m 0	983	1048	918
Calcium	ppm	ASTM D5185m	1118	1122	985
Phosphorus	ppm	ASTM D5185m	1114	1114	1003
Zinc	ppm	ASTM D5185m	1272	1359	1173
Sulfur	ppm	ASTM D5185m	3474	3398	2736

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	2	5	3
Sodium	ppm	ASTM D5185m	2	3	3
Potassium	ppm	ASTM D5185m >20	0	2	3

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.2	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	7.1	8.0	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.2	19.2	20.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.4	14.9	15.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	8.2	7.2	7.5







OIL ANALYSIS REPORT

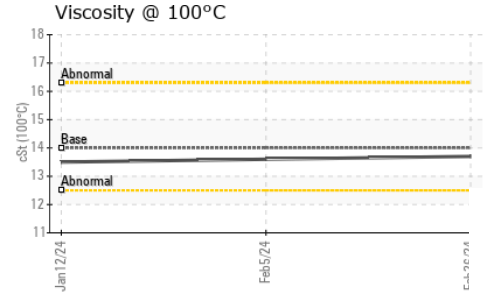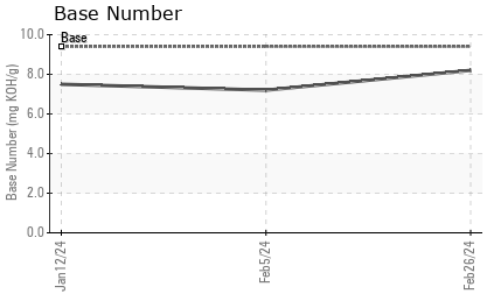

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14	13.7	13.6	13.5

GRAPHS

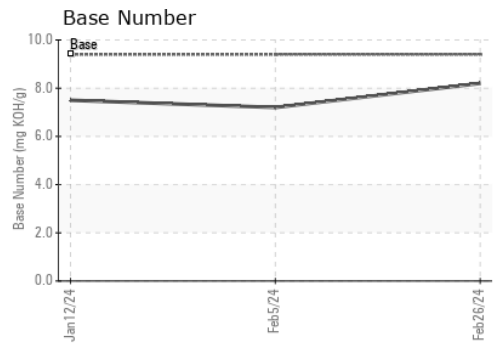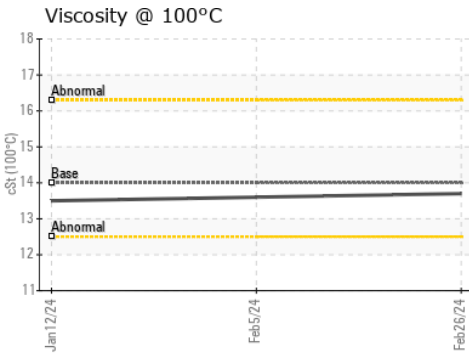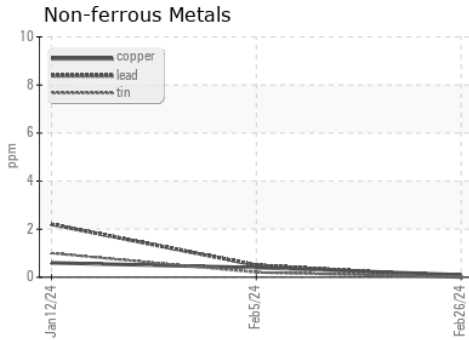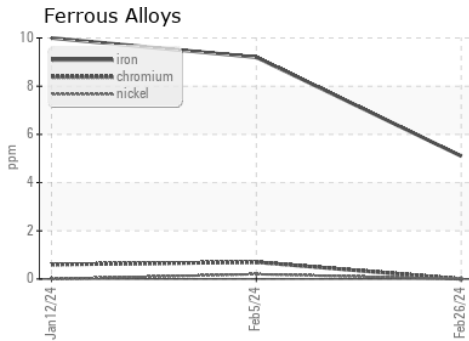

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0006839 **Received** : 28 Mar 2024
Lab Number : **06132706** **Tested** : 30 Mar 2024
Unique Number : 10952171 **Diagnosed** : 02 Apr 2024 - Sean Felton
Test Package : FLEET

Pillen Family Farms - 722828
 26741 NE-91
 Humphrey, NE
 US 61357
 Contact: Troy Runge
 troyfr@pillenfamilyfarms.com
 T: (308)390-6733
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)