




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

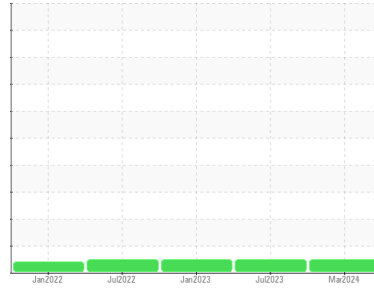

Machine Id  
**INTERNATIONAL Lansing Statesville**

Component  
**Diesel Engine**

Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (24 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>IL0030615</b>	IL0030446	IL0026591
Sample Date	Client Info		<b>04 Mar 2024</b>	27 Jul 2023	24 Jan 2023
Machine Age	mls	Client Info	<b>61199</b>	61199	45287
Oil Age	mls	Client Info	<b>61199</b>	61199	45287
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>20</b>	30	40
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>17</b>	19	45
Lead	ppm	ASTM D5185m >25	<b>0</b>	0	1
Copper	ppm	ASTM D5185m >100	<b>0</b>	1	2
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>17</b>	4	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m 0	<b>51</b>	63	61
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>765</b>	917	967
Calcium	ppm	ASTM D5185m	<b>1365</b>	1178	1314
Phosphorus	ppm	ASTM D5185m	<b>916</b>	1012	1033
Zinc	ppm	ASTM D5185m	<b>1109</b>	1222	1374
Sulfur	ppm	ASTM D5185m	<b>3316</b>	3164	3932

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	5	6
Sodium	ppm	ASTM D5185m	<b>2</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>29</b>	42	86

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.6</b>	0.7	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.8</b>	9.7	9.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.1</b>	20.9	21.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.6</b>	17.0	17.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>8.9</b>	8.7	9.2







# OIL ANALYSIS REPORT

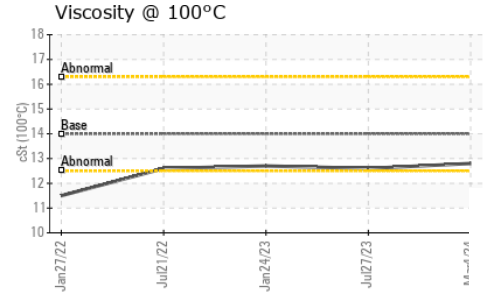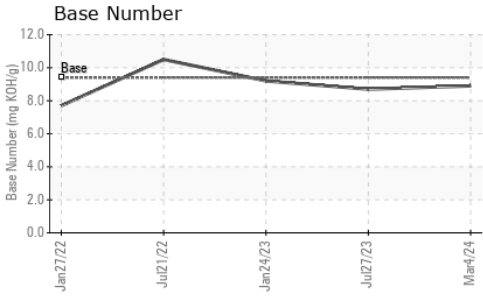

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14	<b>12.8</b>	12.6	12.7

## GRAPHS

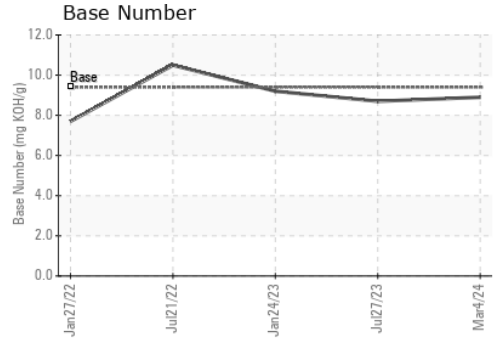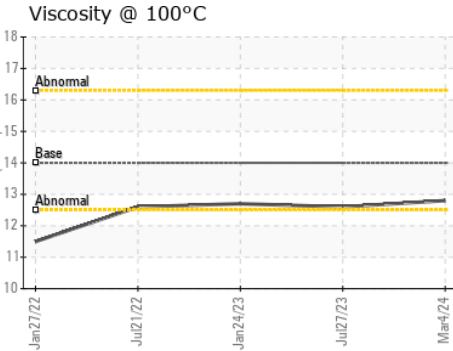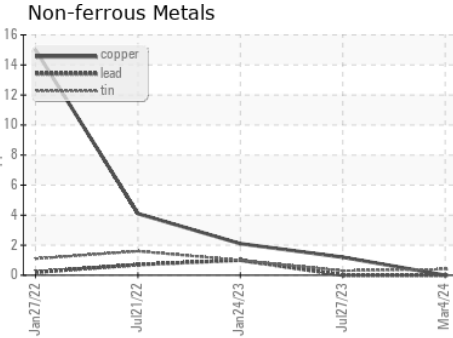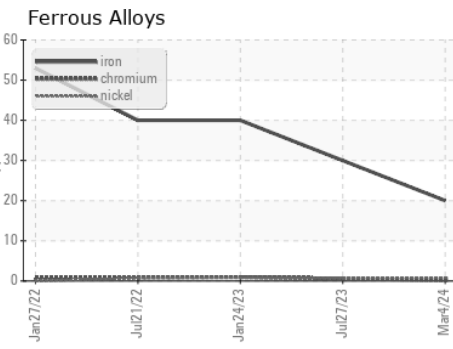

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0030615 **Received** : 29 Mar 2024  
**Lab Number** : **06133093** **Tested** : 31 Mar 2024  
**Unique Number** : 10952558 **Diagnosed** : 31 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**RUSH TRUCK LEASING - CHARLOTTE IDEALEASE**  
 1333 AMERON DR  
 CHARLOTTE, NC  
 US 28206  
 Contact: JERRY DIXON  
 dixonj@rushenterprises.com  
 T: (704)333-4507  
 F: (704)333-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)