




# OIL ANALYSIS REPORT

Sample Rating Trend

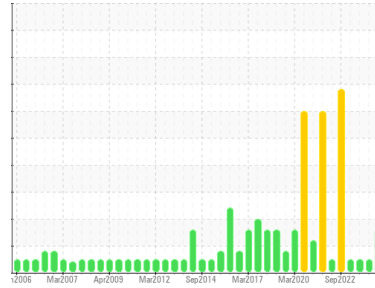

ISO



Machine Id  
**3273**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 25 (30 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>WC0865383</b>   | WC0867572   | WC0838150   |
| Sample Date        | Client Info |             |            | <b>26 Mar 2024</b> | 29 Nov 2023 | 20 Sep 2023 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>ATTENTION</b>   | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.05      | <b>NEG</b> | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >20        | <b>8</b>     | 2        | 9        |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | 0        | 0        |
| Nickel      | ppm | ASTM D5185m | >20        | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Silver      | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>3</b>     | 0        | 0        |
| Lead        | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | 0        | 0        |
| Copper      | ppm | ASTM D5185m | >20        | <b>2</b>     | 0        | 2        |
| Tin         | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | 0        | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |





| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Barium     | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>     | 0        | <1       |
| Magnesium  | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Calcium    | ppm | ASTM D5185m |            | <b>63</b>    | 58       | 57       |
| Phosphorus | ppm | ASTM D5185m |            | <b>348</b>   | 339      | 336      |
| Zinc       | ppm | ASTM D5185m |            | <b>540</b>   | 556      | 517      |
| Sulfur     | ppm | ASTM D5185m |            | <b>921</b>   | 831      | 1004     |

| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >15        | <b>2</b> | 0        | 1        |
| Sodium       | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>2</b> | 0        | 0        |

| FLUID CLEANLINESS |  | method       | limit/base | current         | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>15871</b>    | 1966     | 6529     |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>2218</b>     | 540      | 1092     |
| Particles >14µm   |  | ASTM D7647   | >160       | <b>171</b>      | 54       | 134      |
| Particles >21µm   |  | ASTM D7647   | >40        | <b>68</b>       | 16       | 48       |
| Particles >38µm   |  | ASTM D7647   | >10        | <b>5</b>        | 1        | 4        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>1</b>        | 0        | 1        |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/14  | <b>21/18/15</b> | 18/16/13 | 20/17/14 |

| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 |            | <b>0.60</b> | 0.48     | 0.483    |

# OIL ANALYSIS REPORT


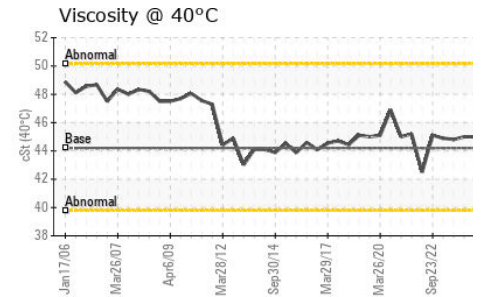
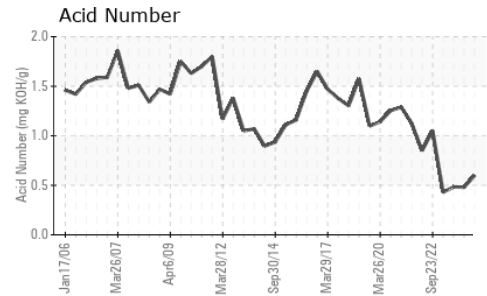
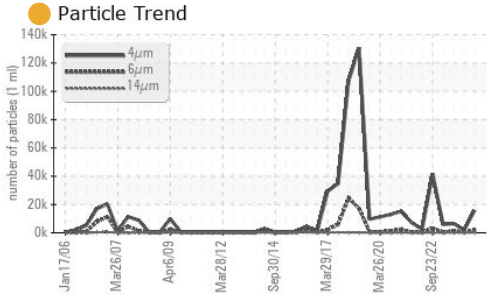
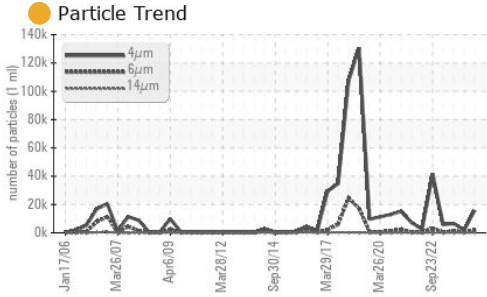


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.05   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 44.2    | 45.0     | 44.8     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color         |        |            |         |          |          |
| Bottom        |        |            |         |          |          |

## GRAPHS

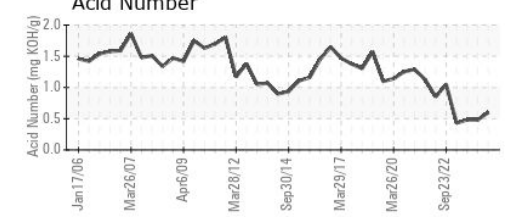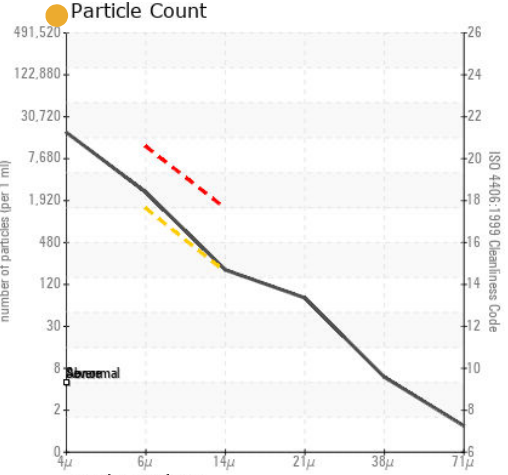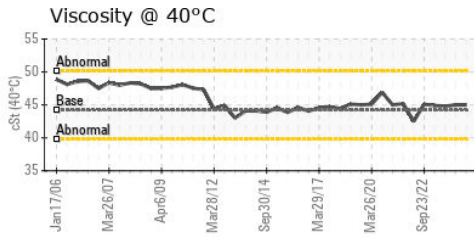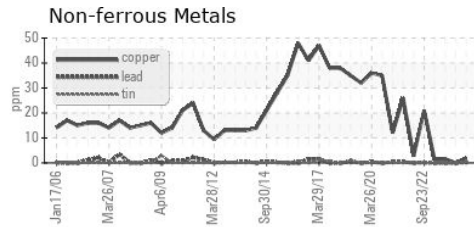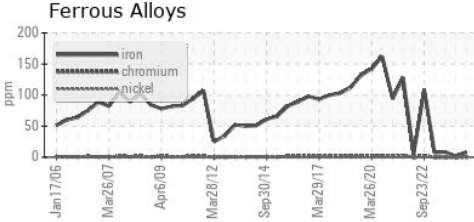

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0865383  
**Lab Number** : 06133209  
**Unique Number** : 10952674  
**Test Package** : IND 2  
**Received** : 29 Mar 2024  
**Tested** : 01 Apr 2024  
**Diagnosed** : 01 Apr 2024 - Wes Davis

**KOYO BEARINGS USA LLC S**  
 400 FRIENDSHIP RD  
 SYLVANIA, GA  
 US 30467  
 Contact: RUSSELL ZIPPERER  
 russell.zipperer@jtekt.com  
 T: (912)564-7151  
 F: (912)564-7244

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)