

# **OIL ANALYSIS REPORT**



ISO

# KAESER AS 25 8883535 (S/N 1755)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

# DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC06133301		
Sample Date		Client Info		19 Jan 2024		
Machine Age	hrs	Client Info		4007		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	3		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm		>50	15		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	nnm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	8		
	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese Magnesium	ppm	ASTM D5185m	90	4		
Calcium	ppm ppm		2	3		
		ASTM D5185m	2	۲ ۱		
Phosphorus Zinc	ppm	ASTM D5185m		10		
	ppm			10		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304		0.009		
ppm Water	ppm	ASTM D6304	>500	97		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7679		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<b>A</b> 710		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	<u> </u>		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>20/19/17</b>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.36		



8 71

E Gk

<u>응</u> 51

Te 41 31

2k

0

12000

1000

800 (maa)

600 Water 400

200

0.50

(B/HOX Ê0.3

E 0.20

Pio 0.1

0.00

10000

600 Water (

4000

200

52

5

48

(D=04) 44 Ba

42

40

38

Abnorma

E

Water (KF)

Abnormal


LE


an,

Water (KF)

Built for a lifetime

-14µm



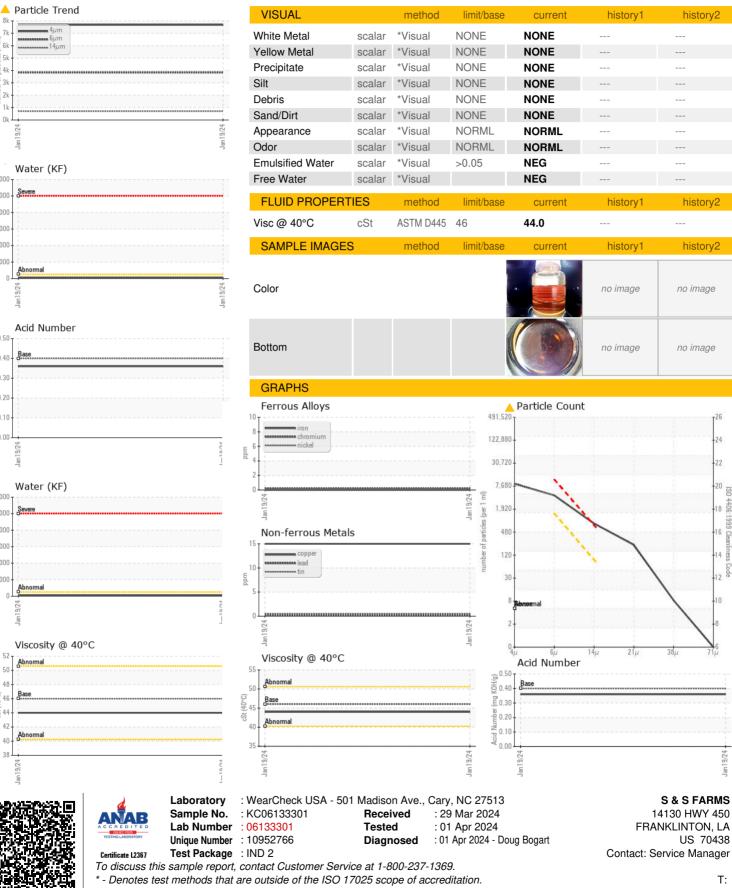

F:

Contact/Location: Service Manager - SSFFRA