

OIL ANALYSIS REPORT

Sample Rating Trend



FRICK 3 (S/N SGC19180784)

Refrigeration Compressor

USPI 1009-68 SC (40 GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


g/813 Ang/2015 Ang/2016 Oct/2017 Jan/2019 Mar/2020 Jan/2022 Mar/2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0008245	USP0004537	USP232109
Sample Date		Client Info		26 Mar 2024	26 Dec 2023	28 Sep 2023
Machine Age	hrs	Client Info		80507	80250	79302
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	<1
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	<1	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	<1
Tin	ppm	ASTM D5185m	>4	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	16
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.01	0.001	0.003	0.004
ppm Water	ppm	ASTM D6304	>100	0	39	44.8
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	988	1029	563
Particles >6µm		ASTM D7647	>2500	149	340	148
Particles >14μm		ASTM D7647	>320	17	23	12
Particles >21μm		ASTM D7647	>80	6	6	3
Particles >38μm		ASTM D7647	>20	3	0	0
Particles >71μm		ASTM D7647	>4	1	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/14/11	17/16/12	16/14/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.028	0.014	0.013





OIL ANALYSIS REPORT

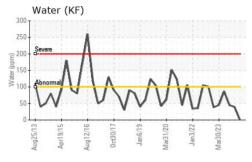











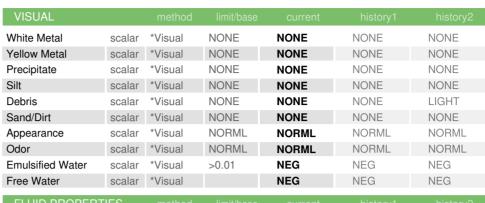

FLUID PROPER	THES	memod			riistory i	History∠
Visc @ 40°C	cSt	ASTM D445	67	64.5	64.4	64.2

SAIVIPLE IIVIAGES	method		
Color		9	



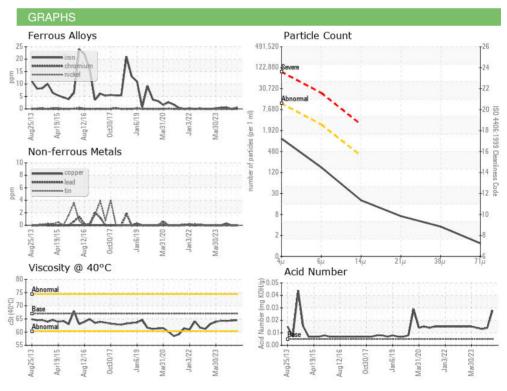



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** : 10952869

Test Package : IND 2

: USP0008245 : 06133404

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

: 29 Mar 2024 : 01 Apr 2024 Diagnosed

: 01 Apr 2024 - Doug Bogart

CONAGRA FOODS - WATERLOO

2701 MIDPORT BLVD WATERLOO, IA US 50703

Contact:

T: F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)