

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

MYCOM TYSSLP 2LTM (S/N 3251586) Component

Refrigeration Compressor

USPI 1009-68 SC (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.








SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		USP0008280	USP05975793	USP248681		
Sample Date		Client Info		22 Mar 2024	10 Oct 2023	06 Jul 2023		
Machine Age	hrs	Client Info		47152	0	0		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	N/A		
Sample Status				NORMAL	NORMAL	ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>8	0	0	2		
Chromium	ppm	ASTM D5185m	>2	<1	0	<1		
Nickel	ppm	ASTM D5185m		<1	0	<1		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m	>2	0	0	0		
Aluminum	ppm	ASTM D5185m	>3	<1	0	0		
Lead	ppm	ASTM D5185m	>2	0	0	0		
Copper	ppm	ASTM D5185m		0	0	2		
Tin	ppm	ASTM D5185m	>4	0	0	<1		
Vanadium	ppm	ASTM D5185m		0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m		0	0	0		
Molybdenum	ppm	ASTM D5185m		0	0	0		
Manganese	ppm	ASTM D5185m		0	0	<1		
Magnesium	ppm	ASTM D5185m		0	0	0		
Calcium	ppm	ASTM D5185m		0	0	<1		
Phosphorus	ppm	ASTM D5185m		0	0	0		
Zinc	ppm	ASTM D5185m		0	0	0		
Sulfur	ppm	ASTM D5185m	50	0	46	21		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	0	<1	<1		
Sodium	ppm	ASTM D5185m		<1	0	0		
Potassium	ppm	ASTM D5185m	>20	<1	0	2		
Water	%	ASTM D6304	>0.01	0.002	0.003	0.003		
ppm Water	ppm	ASTM D6304	>100	22	25.7	39.2		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647		2954	6503	87637		
Particles >6µm		ASTM D7647	>2500	943	1605	1 2993		
Particles >14µm		ASTM D7647	>320	59	53	335		
Particles >21µm		ASTM D7647	>80	13	7	40		
Particles >38µm		ASTM D7647	>20	1	0	0		
Particles >71µm		ASTM D7647	>4	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>/18/15	19/17/13	20/18/13	4 /21/16		
FLUID DEGRADATION method limit/base current history1 history2								
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.027	0.014	0.014		




OIL ANALYSIS REPORT










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67	71.3	71.0	70.4
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						
Bottom						

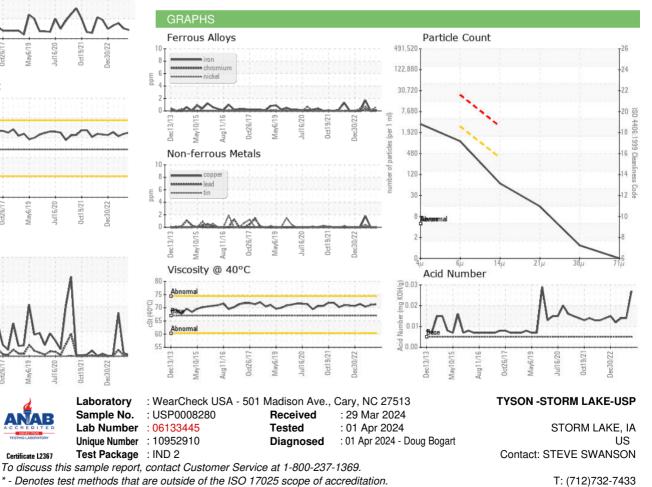

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: STEVE SWANSON - TYSSTO

F: (712)749-5277