

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

FRICK 1 (S/N S1057RFMCTIAA03)

Refrigeration Compressor

USPI 1009-68 SC (85 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		11111	11111				
			-				
						1.1.1.1.1	
				1.1.1.1			
2014	Jul2015	Oct2016	Jan2018	Apr2019	Jul2020	Jan2022	Mar2023



SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		USP231028	USP0004532	USP232104
Sample Date		Client Info		26 Mar 2024	26 Dec 2023	28 Sep 2023
Machine Age	hrs	Client Info		104581	102513	101864
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	2
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	<1	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m		0	0	<1
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	<1	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	14
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	1
Sodium	ppm	ASTM D5185m		<1	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.01	0.003	0.003	0.001
ppm Water	ppm	ASTM D6304	>100	31	27	11.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	442	1399	377
Particles >6µm		ASTM D7647	>2500	151	282	121
Particles >14µm		ASTM D7647	>320	21	14	13
Particles >21µm		ASTM D7647	>80	7	3	3
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/14/12	18/15/11	16/14/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.028	0.014	0.014



250

20

E 150

5

20

of particles

51 0

250

200 E 150 Water

admin

Nater

OIL ANALYSIS REPORT

*Visual

*Visual

*Visua

*Visual

*Visual

*Visual

*Visual

*Visual

ASTM D445

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

>0.01

67

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

65.3

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

64.8

NONE

NONE

NONE

NONE

NONE

NONE


NORML


NORML

NEG

NEG

65.2

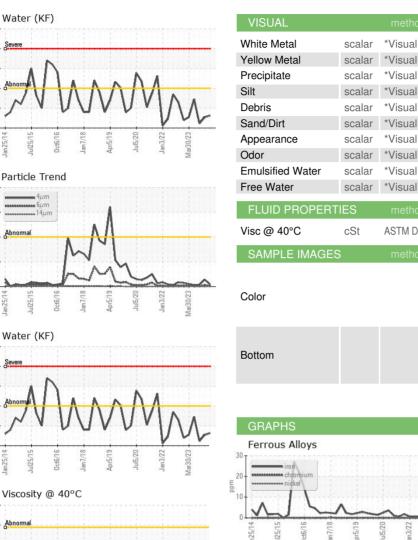

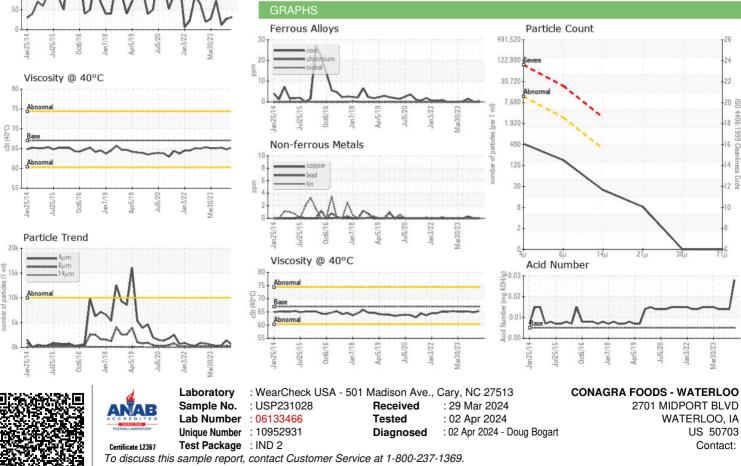

^{* -} Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - CAGWATIOW

T: F: